


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.23 lm/W			
MODEL		I _{max} (cd)	1355	S/MH(C0/180)	0.81
NOMINAL POWER(W)	12W	LOR(%)	100.0	S/MH(C90/270)	0.82
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1104.7	η UP,DN(C0-180)	0.1,49.9
NOMINAL FLUX(lm)	1104.68	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,50.0
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

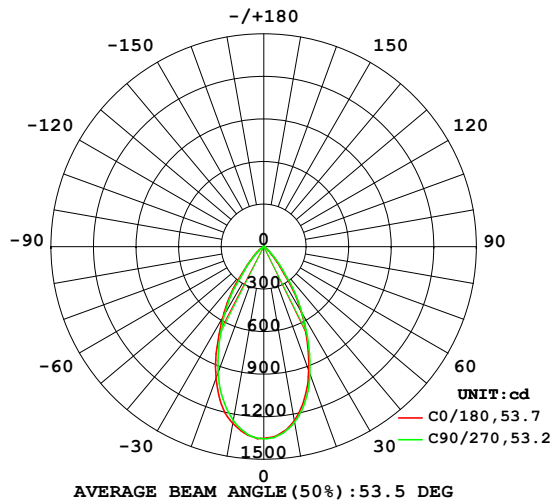

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

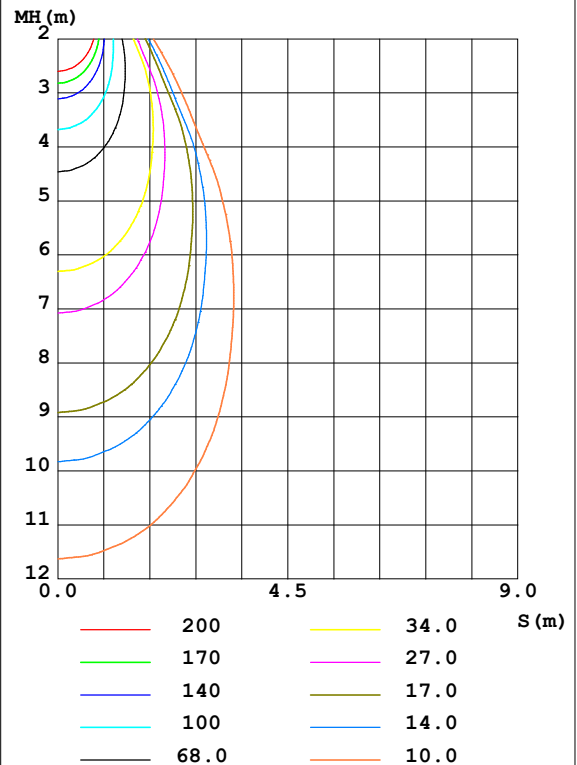

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1247	1247	1256	1291	1265	1262	1245	1210	0- 10	124.4	124.4	11.3,11.3
20	929.5	930.3	954.1	1026	986.9	982.5	943.8	880.8	10- 20	312.8	437.2	39.6,39.6
30	531.5	523.1	540.6	619.8	581.6	568.6	556.2	495.4	20- 30	341.8	779.0	70.5,70.5
40	167.1	176.4	194.5	243.2	217.4	209.3	200.1	160.9	30- 40	224.4	1003	90.8,90.8
50	31.15	31.81	43.36	66.23	62.22	59.03	49.83	31.66	40- 50	81.81	1085	98.2,98.2
60	1.140	1.208	2.128	7.582	5.330	4.066	3.661	1.063	50- 60	17.51	1103	99.8,99.8
70	0.0437	0.0484	0.0581	0.0654	0.0605	0.0605	0.0484	0.0460	60- 70	0.6114	1103	99.9,99.9
80	0.0170	0.0218	0.0243	0.0363	0.0242	0.0315	0.0242	0.0170	70- 80	0.0410	1103	99.9,99.9
90	0.0072	0.0000	0.0025	0.0048	0	0	0.0072	0.0024	80- 90	0.0138	1103	99.9,99.9
100	0	0.0000	0	0	0	0	0	0	90-100	0.0011	1103	99.9,99.9
110	0.0073	0.0121	0.0072	0.0073	0	0	0.0000	0.0024	100-110	0.0023	1103	99.9,99.9
120	0.0411	0.0461	0.0314	0.0267	0.0314	0.0290	0.0364	0.0556	110-120	0.0157	1103	99.9,99.9
130	0.1403	0.1454	0.1282	0.1067	0.1164	0.1234	0.1383	0.1717	120-130	0.0692	1104	99.9,99.9
140	0.3170	0.3271	0.3000	0.2714	0.3005	0.2977	0.3321	0.3775	130-140	0.1664	1104	99.9,99.9
150	0.5592	0.5597	0.5471	0.5039	0.5379	0.5471	0.5864	0.6343	140-150	0.2701	1104	99.9,99.9
160	0.8158	0.8091	0.8014	0.7582	0.7994	0.7990	0.8407	0.8789	150-160	0.3146	1104	100,100
170	1.024	1.029	1.024	0.9931	1.029	1.017	1.054	1.075	160-170	0.2601	1105	100,100
180	1.146	1.119	1.141	1.133	1.126	1.121	1.136	1.131	170-180	0.1030	1105	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

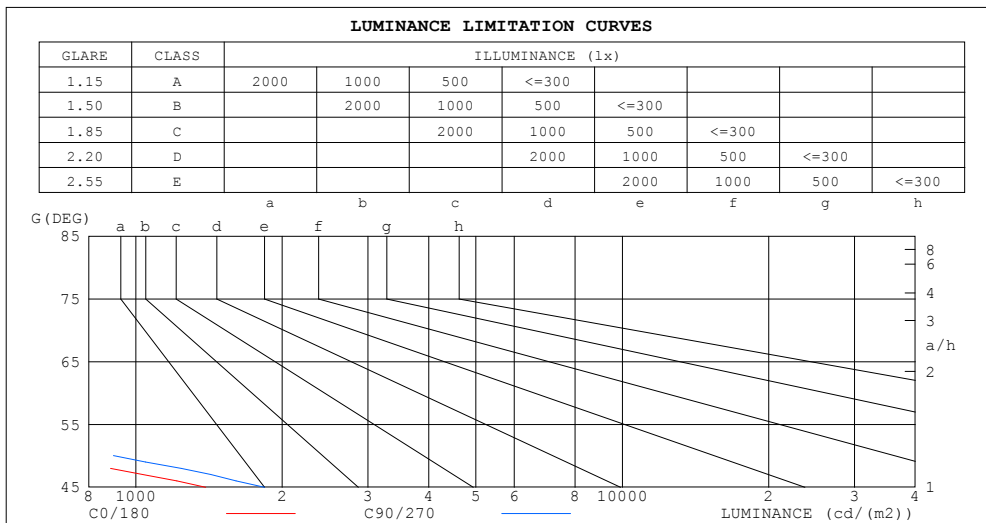

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1	2
80	1	2
75	2	2
70	2	2
65	2	2
60	30	57
55	191	333
50	646	899
45	1392	1839


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.72	.68	.77	.72	.68	.75	.71	.67	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.55	.54
10.0	.62	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.52	.60	.55	.52	.51

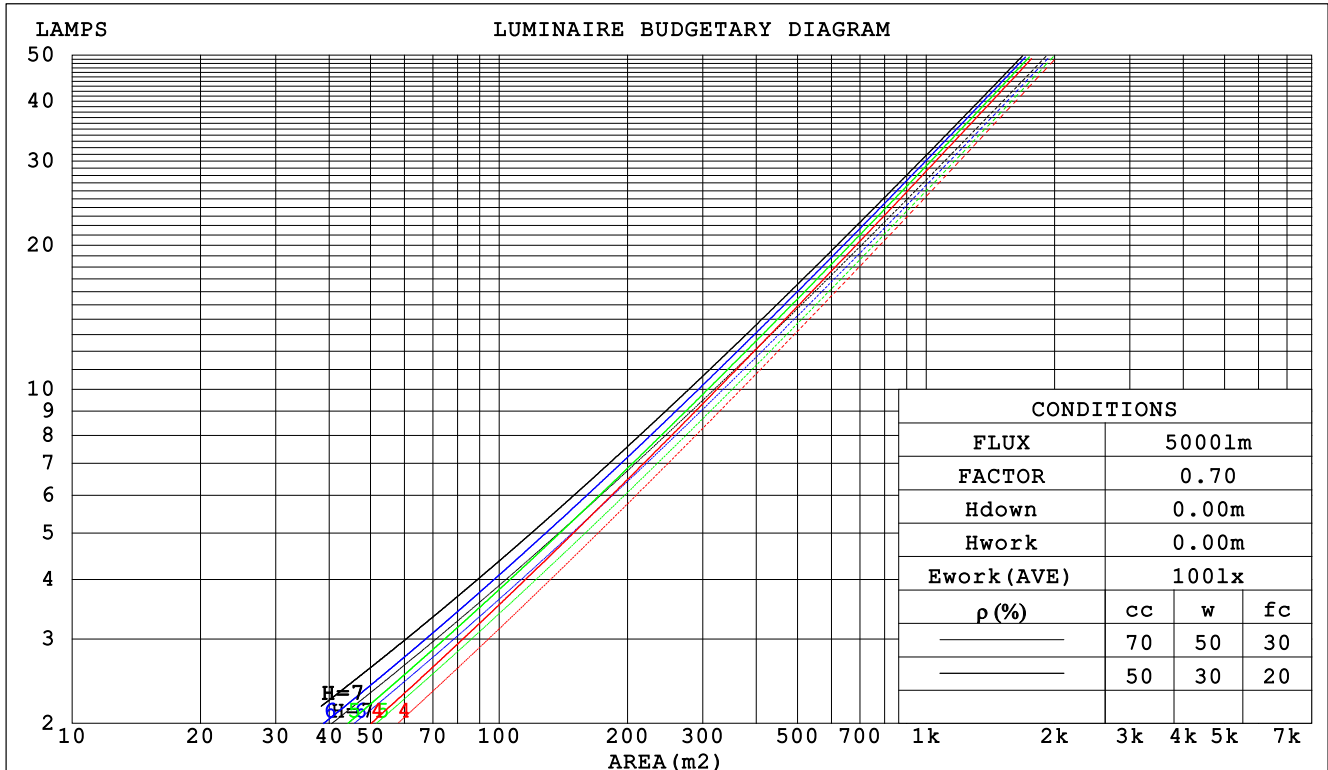

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.158	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.091	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024		
3.0	.162	.086	.026	.158	.084	.025	.149	.080	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.018	.122	.063	.018	.117	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.118	.060	.017	.113	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.134	.115	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.134	.100	.073	.115	.086	.064	.079	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.068	.044	.070	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.063	.040	.023	.037	.023	.014	.012	.008	.004	
9.0	.102	.060	.032	.087	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.048	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm										
NAME: WL-2CLD3IN12WB5D3HVWH					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 3IN			SERIAL No.:		
MFR.: WS					SUR.:0.024*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.2	10.2	9.5	10.4	10.5	9.7	10.6	9.9	10.8	11.0
3H	9.1	9.9	9.3	10.1	10.3	9.5	10.4	9.8	10.6	10.8
4H	9.0	9.8	9.2	10.0	10.2	9.4	10.3	9.7	10.5	10.7
6H	8.9	9.6	9.2	9.9	10.1	9.3	10.1	9.6	10.4	10.6
8H	8.8	9.6	9.1	9.8	10.1	9.3	10.0	9.6	10.3	10.6
12H	8.8	9.5	9.1	9.8	10.0	9.2	10.0	9.6	10.2	10.5
4H 2H	9.0	9.8	9.2	10.0	10.2	9.4	10.3	9.7	10.5	10.7
3H	8.8	9.5	9.1	9.8	10.0	9.2	10.0	9.6	10.2	10.5
4H	8.7	9.3	9.0	9.6	9.9	9.2	9.8	9.5	10.1	10.4
6H	8.6	9.2	9.0	9.5	9.8	9.1	9.6	9.4	10.0	10.3
8H	8.5	9.1	8.9	9.4	9.8	9.0	9.5	9.4	9.9	10.2
12H	8.5	9.0	8.9	9.3	9.7	9.0	9.4	9.4	9.8	10.2
8H 4H	8.5	9.1	8.9	9.4	9.8	9.0	9.5	9.4	9.9	10.2
6H	8.4	8.9	8.9	9.3	9.7	8.9	9.3	9.3	9.7	10.1
8H	8.4	8.8	8.8	9.2	9.6	8.8	9.2	9.3	9.6	10.1
12H	8.3	8.7	8.8	9.1	9.6	8.8	9.1	9.3	9.6	10.0
12H 4H	8.5	9.0	8.9	9.3	9.7	9.0	9.4	9.4	9.8	10.2
6H	8.4	8.8	8.8	9.2	9.6	8.8	9.2	9.3	9.6	10.1
8H	8.3	8.7	8.8	9.1	9.6	8.8	9.1	9.3	9.6	10.0
Variations with the observer position at spacings:										
S = 1.0H	+ 3.1 / -20.3					+ 3.3 / -16.4				
1.5H	+ 5.1 / -12.9					+ 5.1 / -12.0				
2.0H	+ 6.8 / -32.6					+ 7.2 / -31.9				

CIE Pub.117 Corrected 1105 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	94	87	83	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

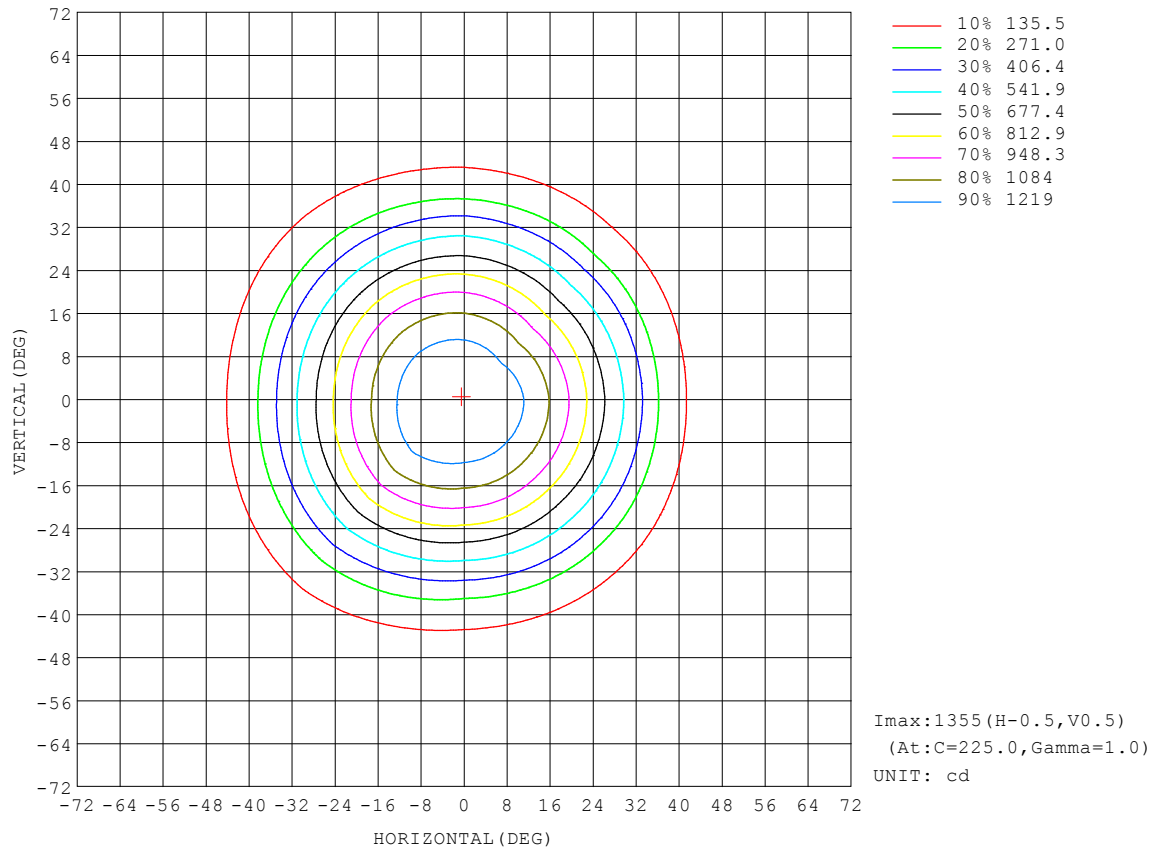


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

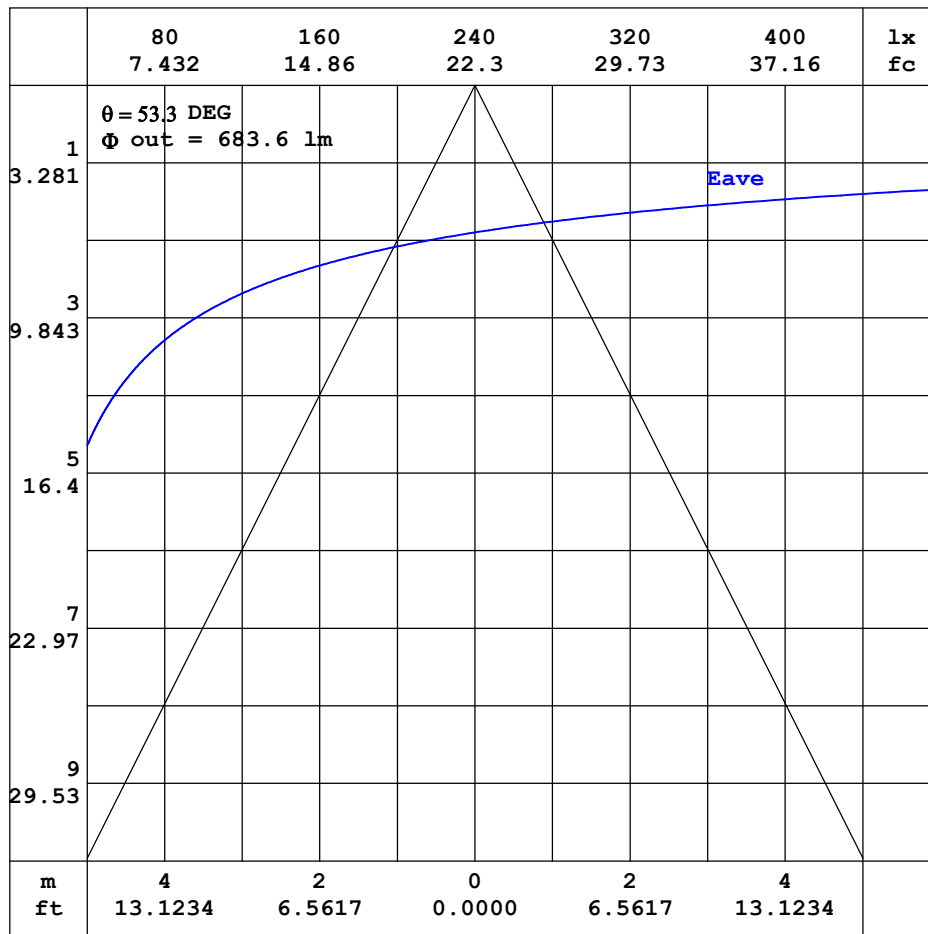


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

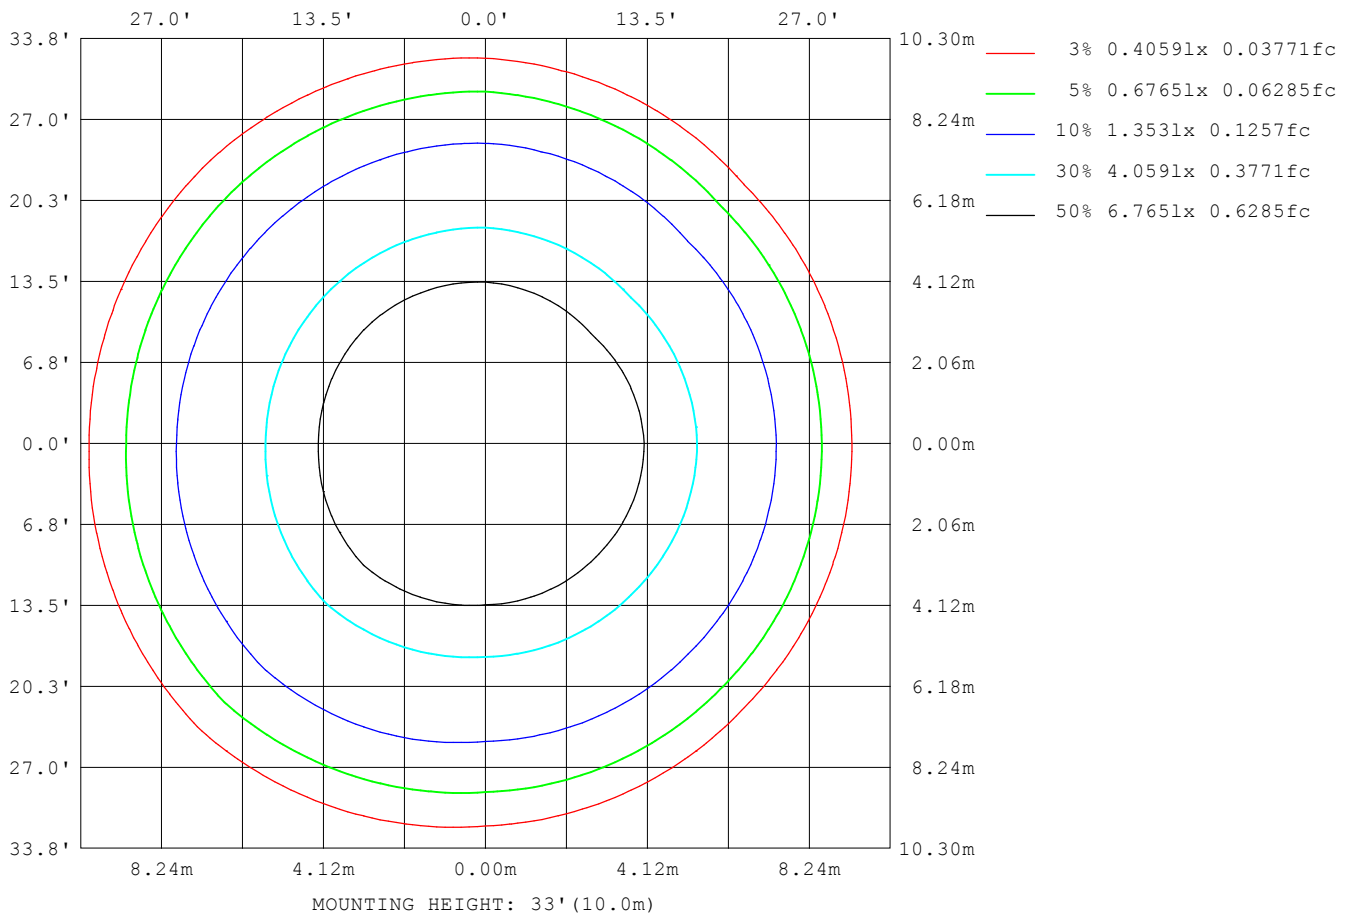

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4
L_0~180 (75) av	2
L_0~180 (85) av	1
L_90~270 (65) av	2
L_90~270 (75) av	2
L_90~270 (85) av	2
L_45 (65) av	7
L_45 (75) av	2
L_45 (85) av	2

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

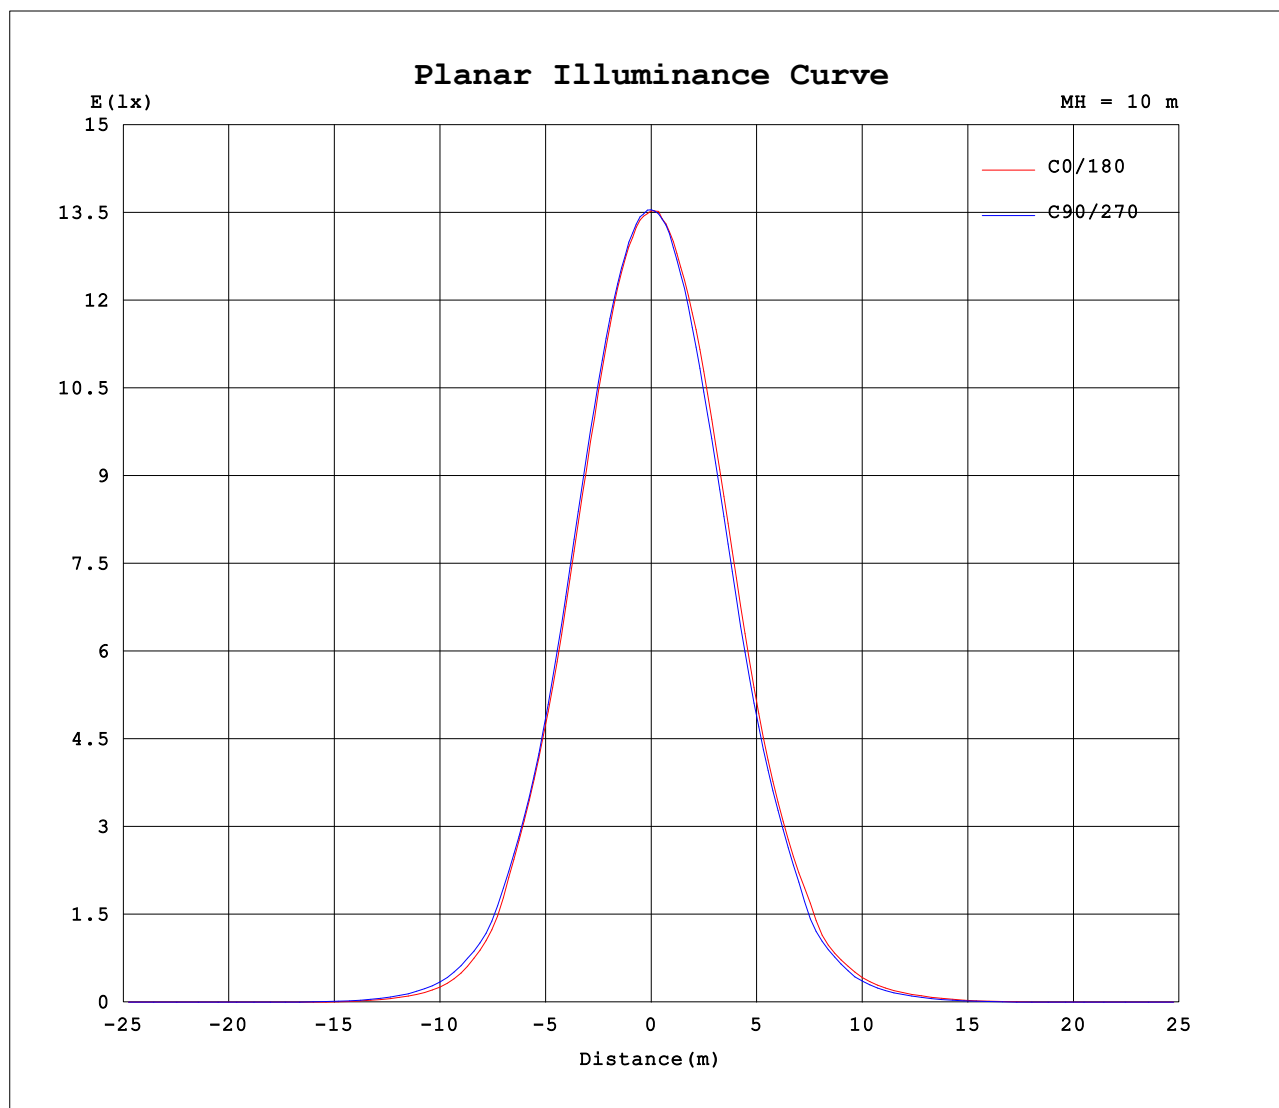

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.4V I:0.0960A P:11.60W PF:0.9920 Freq:60.00Hz Lamp Flux:1104.68x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1353	1354	1354	1347	1353	1354	1354	1347										
5	1323	1328	1330	1346	1332	1333	1329	1307										
10	1247	1247	1256	1291	1265	1262	1245	1210										
15	1109	1115	1131	1184	1154	1146	1115	1070										
20	930	930	954	1026	987	983	944	881										
25	723	718	744	827	783	776	745	684										
30	532	523	541	620	582	569	556	495										
35	325	329	355	433	402	388	374	291										
40	167	176	194	243	217	209	200	161										
45	73.8	78.3	97.5	136	120	117	102	74.9										
50	31.1	31.8	43.4	66.2	62.2	59.0	49.8	31.7										
55	8.22	8.40	14.3	29.7	26.7	23.2	19.7	7.83										
60	1.14	1.21	2.13	7.58	5.33	4.07	3.66	1.06										
65	0.06	0.08	0.08	0.42	0.21	0.27	0.07	0.07										
70	0.04	0.05	0.06	0.07	0.06	0.06	0.05	0.05										
75	0.03	0.03	0.04	0.05	0.04	0.04	0.03	0.03										
80	0.02	0.02	0.02	0.04	0.02	0.03	0.02	0.02										
85	0.00	0.01	0.01	0.02	0.01	0.02	0.01	0.00										
90	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00										
95	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
115	0.02	0.02	0.02	0.01	0.00	0.00	0.01	0.02										
120	0.04	0.05	0.03	0.03	0.03	0.03	0.04	0.06										
125	0.08	0.08	0.07	0.06	0.06	0.06	0.08	0.10										
130	0.14	0.15	0.13	0.11	0.12	0.12	0.14	0.17										
135	0.22	0.23	0.21	0.18	0.20	0.20	0.22	0.26										
140	0.32	0.33	0.30	0.27	0.30	0.30	0.33	0.38										
145	0.44	0.44	0.42	0.38	0.42	0.42	0.45	0.50										
150	0.56	0.56	0.55	0.50	0.54	0.55	0.59	0.63										
155	0.68	0.69	0.68	0.63	0.67	0.68	0.72	0.76										
160	0.82	0.81	0.80	0.76	0.80	0.80	0.84	0.88										
165	0.93	0.93	0.92	0.88	0.91	0.92	0.96	1.00										
170	1.02	1.03	1.02	0.99	1.03	1.02	1.05	1.08										
175	1.10	1.09	1.10	1.09	1.10	1.10	1.12	1.13										
180	1.15	1.12	1.14	1.13	1.13	1.12	1.14	1.13										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: