


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 84.64 lm/W			
MODEL		I _{max} (cd)	1547	S/MH(C0/180)	0.81
NOMINAL POWER(W)	15W	LOR(%)	100.0	S/MH(C90/270)	0.80
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1252.6	η UP,DN(C0-180)	0.1,50.8
NOMINAL FLUX(lm)	1252.64	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.0
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

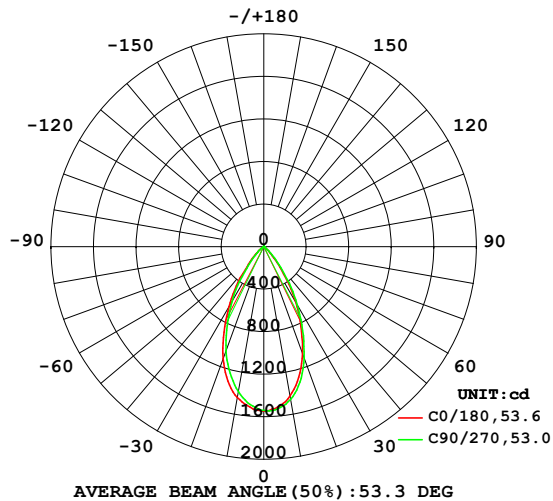

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

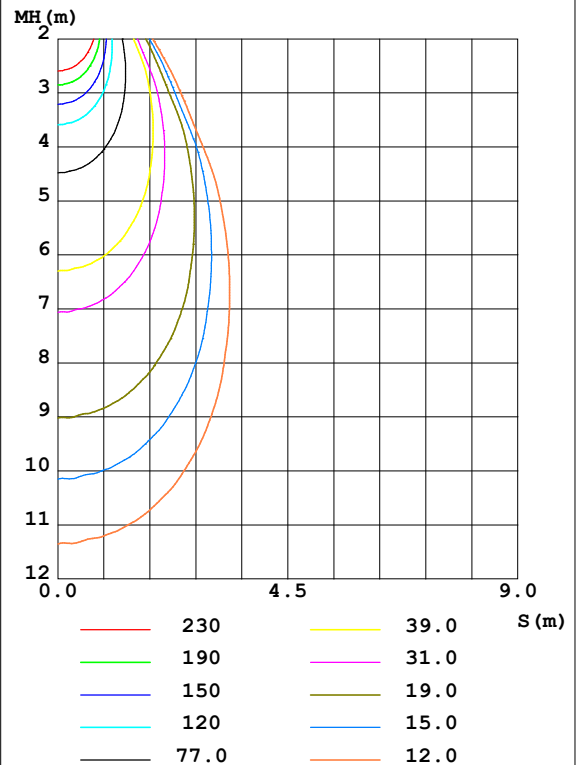

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1426	1433	1457	1478	1440	1418	1384	1366	0- 10	141.6	141.6	11.3,11.3
20	1069	1075	1110	1186	1122	1097	1038	982.0	10- 20	355.6	497.2	39.7,39.7
30	603.7	606.6	631.3	717.2	657.5	627.4	600.7	545.4	20- 30	387.9	885.1	70.7,70.7
40	194.5	208.1	226.9	285.3	247.4	222.7	212.5	174.1	30- 40	253.6	1139	90.9,90.9
50	35.14	36.15	48.58	74.54	69.43	65.19	55.83	35.88	40- 50	92.07	1231	98.3,98.3
60	1.256	1.324	2.278	8.208	6.084	4.662	4.177	1.205	50- 60	19.58	1250	99.8,99.8
70	0.0558	0.0605	0.0655	0.0702	0.0629	0.0582	0.0580	0.0460	60- 70	0.6791	1251	99.9,99.9
80	0.0291	0.0194	0.0291	0.0315	0.0363	0.0291	0.0290	0.0194	70- 80	0.0473	1251	99.9,99.9
90	0	0.0024	0.0001	0.0072	0.0096	0.0024	0.0001	0.0000	80- 90	0.0168	1251	99.9,99.9
100	0.0049	0.0024	0.0001	0.0024	0.0048	0	0	0	90-100	0.0020	1251	99.9,99.9
110	0.0145	0.0145	0.0145	0.0049	0.0001	0	0.0072	0.0073	100-110	0.0026	1251	99.9,99.9
120	0.0847	0.0703	0.0653	0.0509	0.0315	0.0290	0.0460	0.0580	110-120	0.0258	1251	99.9,99.9
130	0.2444	0.2327	0.2177	0.1891	0.1382	0.1403	0.1600	0.1936	120-130	0.0992	1251	99.9,99.9
140	0.5178	0.5041	0.4767	0.4410	0.3442	0.3436	0.3805	0.4260	130-140	0.2312	1251	99.9,99.9
150	0.8473	0.8358	0.7819	0.7583	0.6130	0.6294	0.6761	0.7239	140-150	0.3593	1252	99.9,99.9
160	1.145	1.143	1.102	1.068	0.9158	0.9394	0.9860	1.044	150-160	0.4074	1252	100,100
170	1.375	1.371	1.346	1.330	1.247	1.245	1.281	1.317	160-170	0.3320	1253	100,100
180	1.429	1.422	1.431	1.443	1.434	1.419	1.429	1.448	170-180	0.1308	1253	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

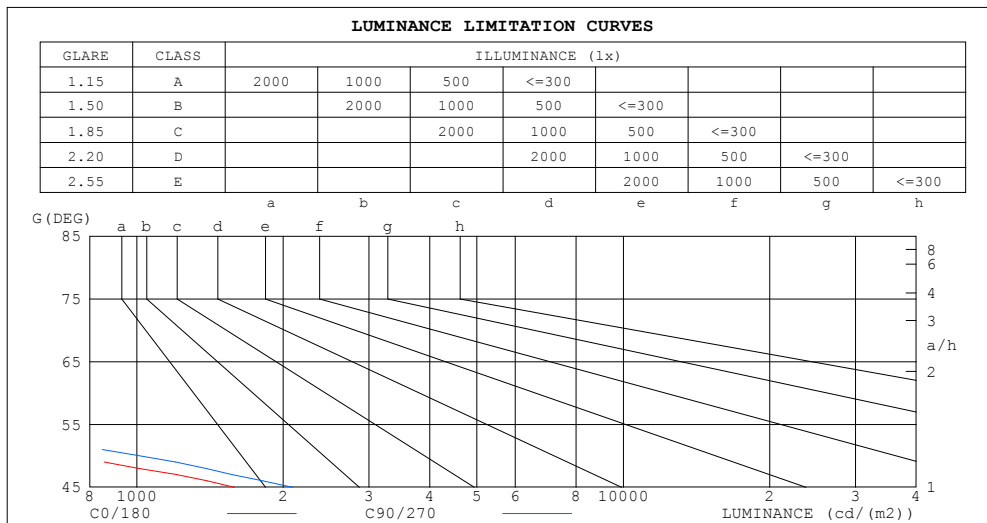

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2	3
80	2	2
75	2	2
70	2	3
65	2	3
60	34	61
55	209	357
50	729	1008
45	1584	2090


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.87	.82	.79	.85	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.73	.68	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.56	.66	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.61	.56	.53	.60	.55	.52	.51

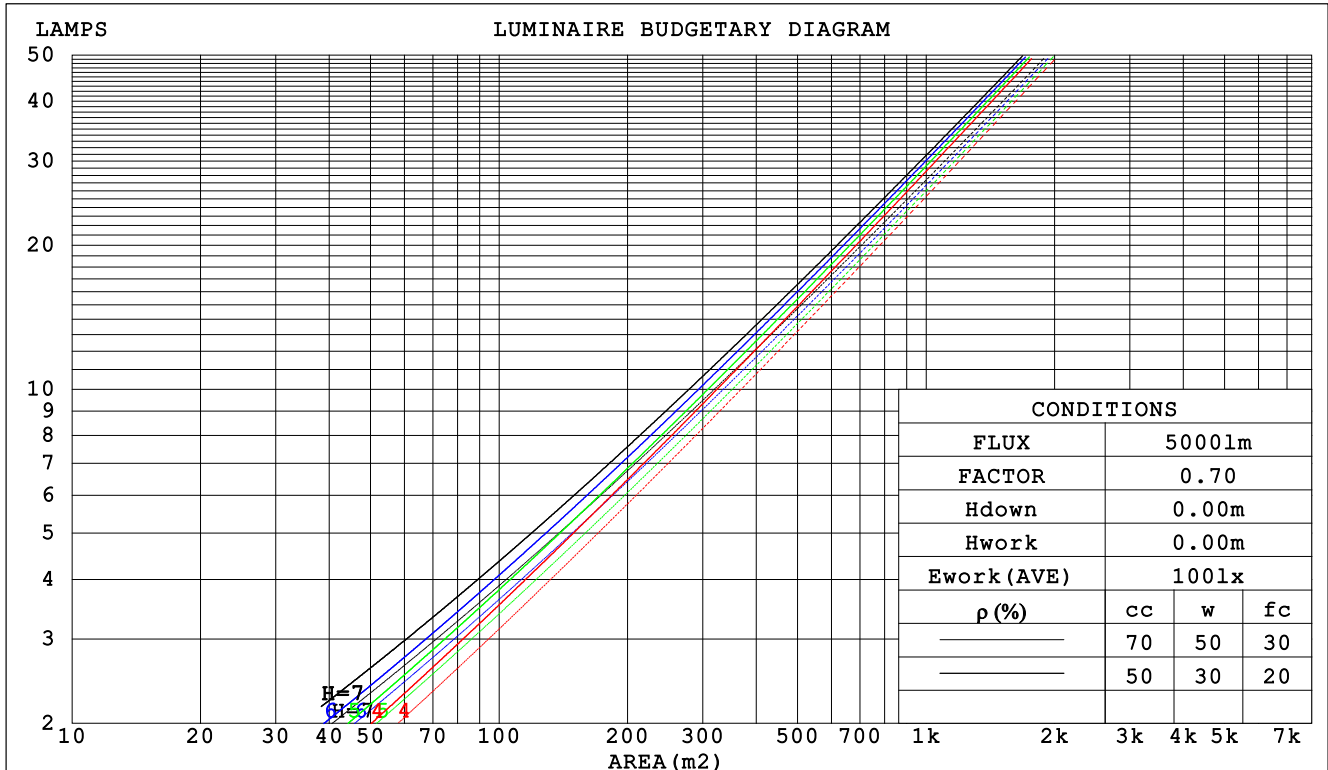

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm					
NAME: WL-2CLD3IN15WB5D3HVWH			TYPE:2700K		WEIGHT:
SPEC.:			DIM.: 3IN		SERIAL No.:
MFR.: WS			SUR.:0.024*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.157	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.090	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024		
3.0	.162	.086	.026	.157	.084	.025	.148	.080	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.080	.024	.151	.079	.023	.143	.076	.023	.135	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.071	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.018	.122	.062	.018	.117	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.117	.059	.017	.113	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.109	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.134	.115	.098	.092	.079	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.115	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.005	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.048	.025	.058	.034	.018	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm										
NAME: WL-2CLD3IN15WB5D3HVWH					TYPE:2700K			WEIGHT:		
SPEC.:					DIM.: 3IN			SERIAL No.:		
MFR.: WS					SUR.:0.024*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.8	10.8	10.0	10.9	11.1	10.3	11.3	10.5	11.4	11.6
3H	9.6	10.5	9.9	10.7	10.9	10.1	11.0	10.4	11.2	11.4
4H	9.5	10.4	9.8	10.6	10.8	10.1	10.9	10.3	11.1	11.3
6H	9.5	10.2	9.8	10.5	10.7	10.0	10.7	10.3	11.0	11.2
8H	9.4	10.2	9.7	10.4	10.7	9.9	10.7	10.2	10.9	11.2
12H	9.4	10.1	9.7	10.3	10.6	9.9	10.6	10.2	10.9	11.1
4H 2H	9.6	10.4	9.8	10.6	10.8	10.1	10.9	10.3	11.1	11.3
3H	9.4	10.1	9.7	10.3	10.6	9.9	10.6	10.2	10.9	11.1
4H	9.3	9.9	9.6	10.2	10.5	9.8	10.4	10.1	10.7	11.0
6H	9.2	9.7	9.6	10.1	10.4	9.7	10.2	10.1	10.6	10.9
8H	9.1	9.6	9.5	10.0	10.4	9.6	10.2	10.0	10.5	10.9
12H	9.1	9.6	9.5	9.9	10.3	9.6	10.1	10.0	10.4	10.8
8H 4H	9.1	9.6	9.5	10.0	10.4	9.6	10.2	10.0	10.5	10.9
6H	9.0	9.5	9.5	9.8	10.3	9.5	10.0	10.0	10.4	10.8
8H	9.0	9.3	9.4	9.8	10.2	9.5	9.9	9.9	10.3	10.7
12H	8.9	9.2	9.4	9.7	10.2	9.4	9.7	9.9	10.2	10.7
12H 4H	9.1	9.6	9.5	9.9	10.3	9.6	10.1	10.0	10.4	10.8
6H	9.0	9.3	9.4	9.8	10.2	9.5	9.9	9.9	10.3	10.7
8H	8.9	9.2	9.4	9.7	10.2	9.4	9.7	9.9	10.2	10.7
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -20.8					+ 3.3 / -17.1				
1.5H	+ 5.1 / -13.5					+ 5.2 / -12.6				
2.0H	+ 6.8 / -32.5					+ 7.2 / -31.9				

CIE Pub.117 Corrected 1253 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.8)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	79	75	71
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

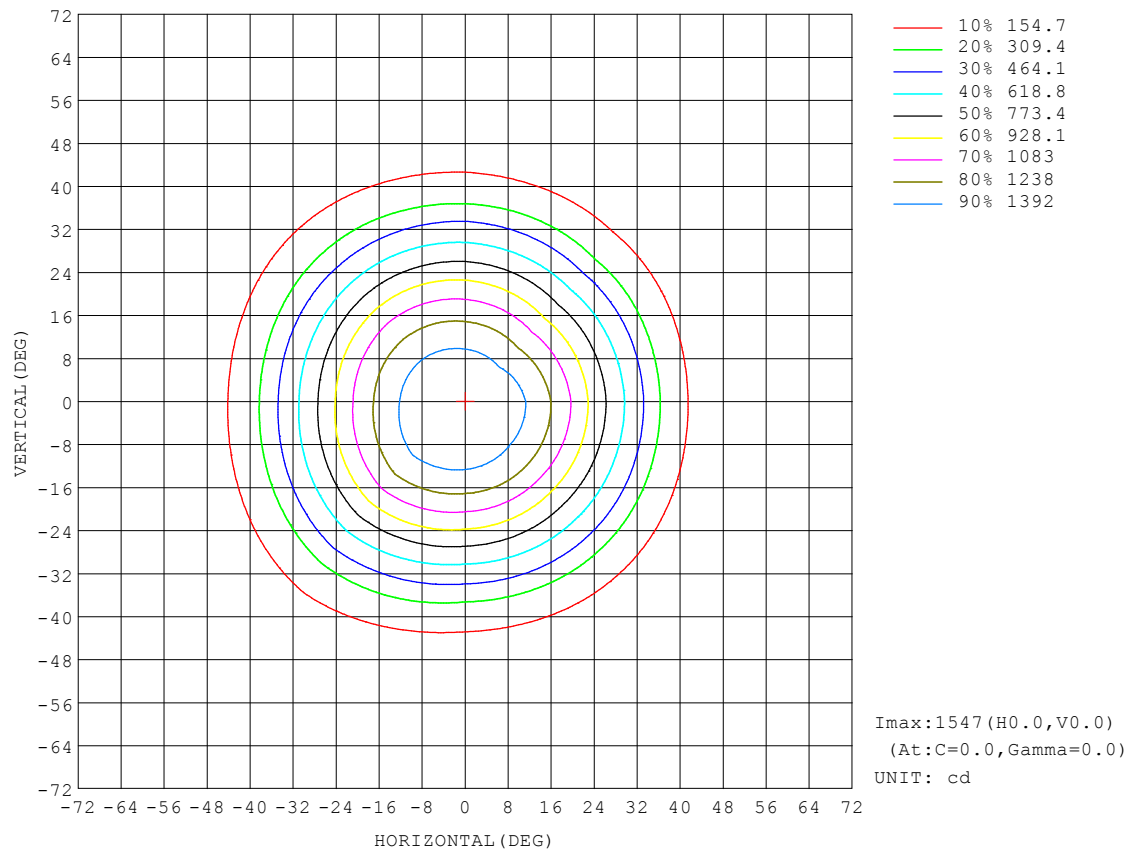


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

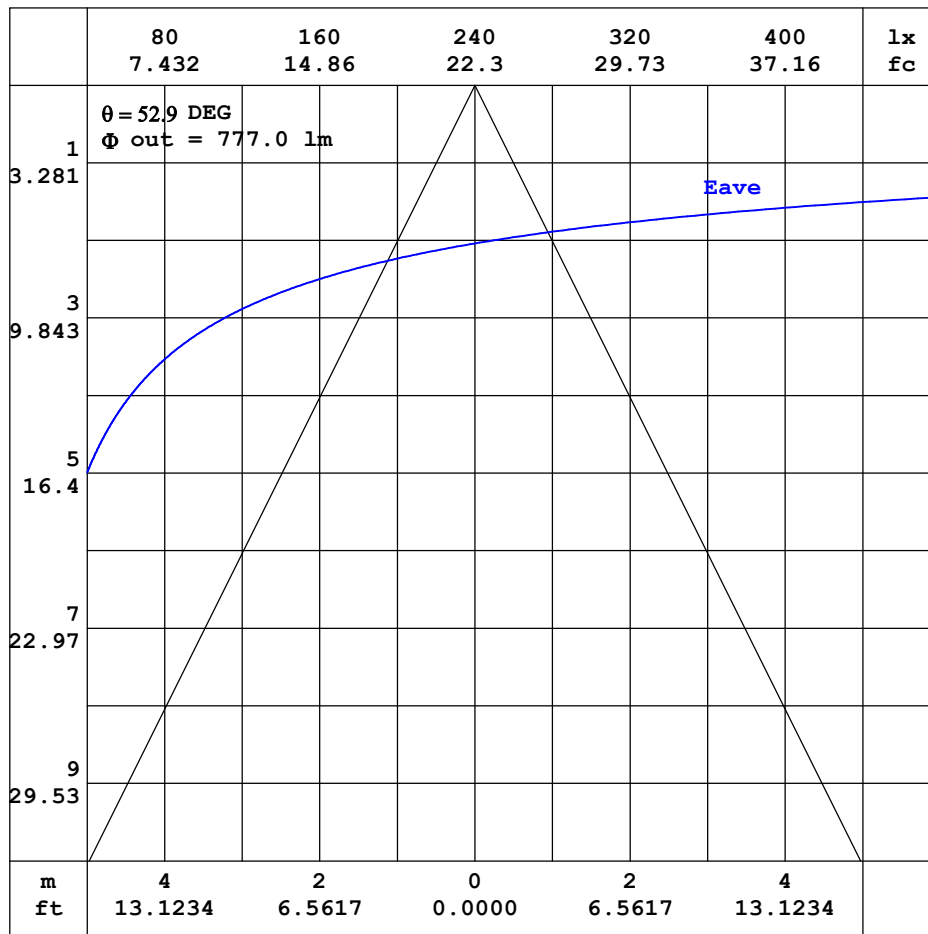


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

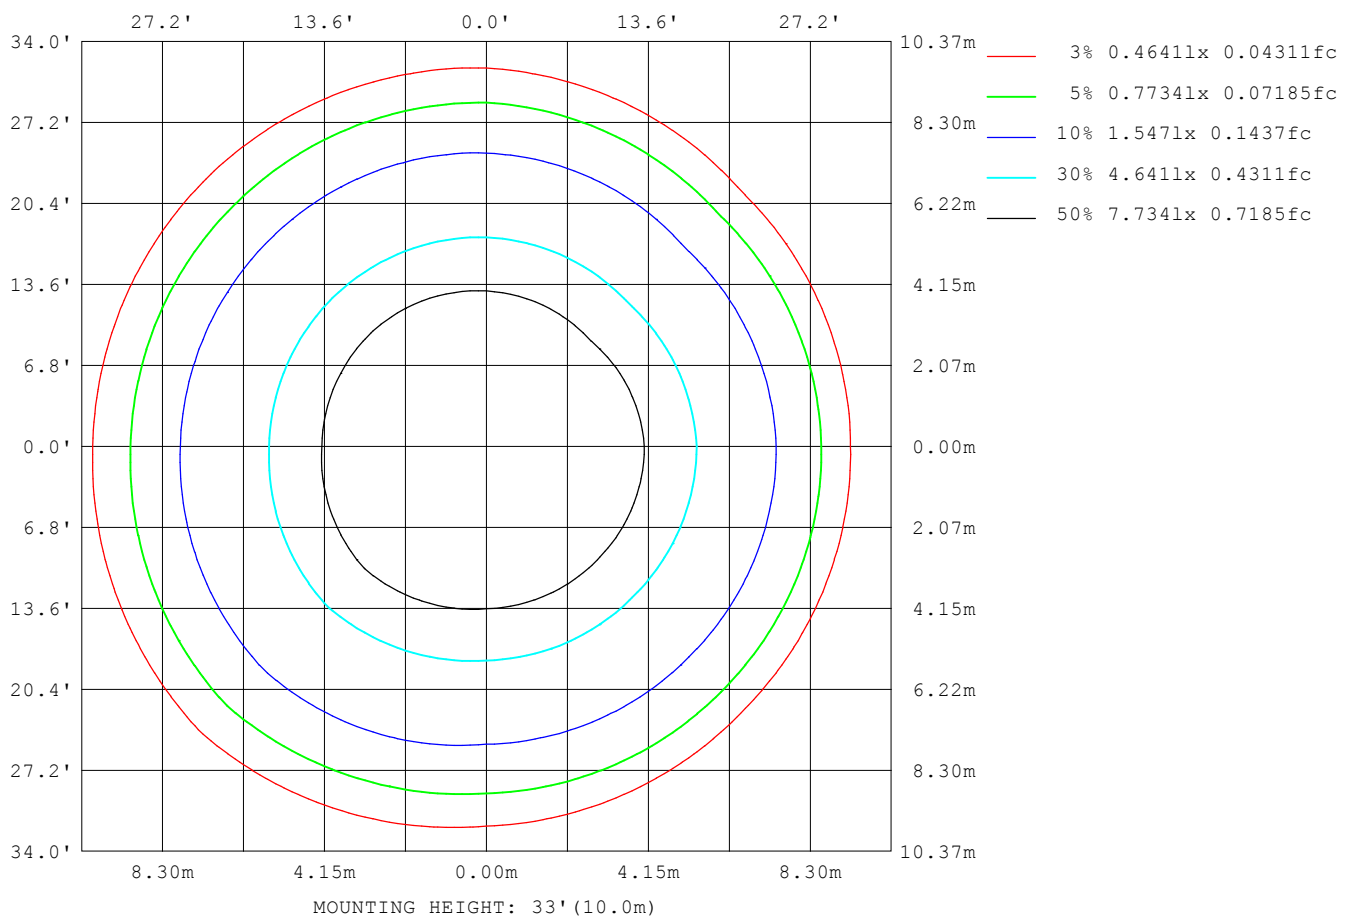

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5
L_0~180 (75) av	2
L_0~180 (85) av	3
L_90~270 (65) av	3
L_90~270 (75) av	2
L_90~270 (85) av	2
L_45 (65) av	7
L_45 (75) av	2
L_45 (85) av	2

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

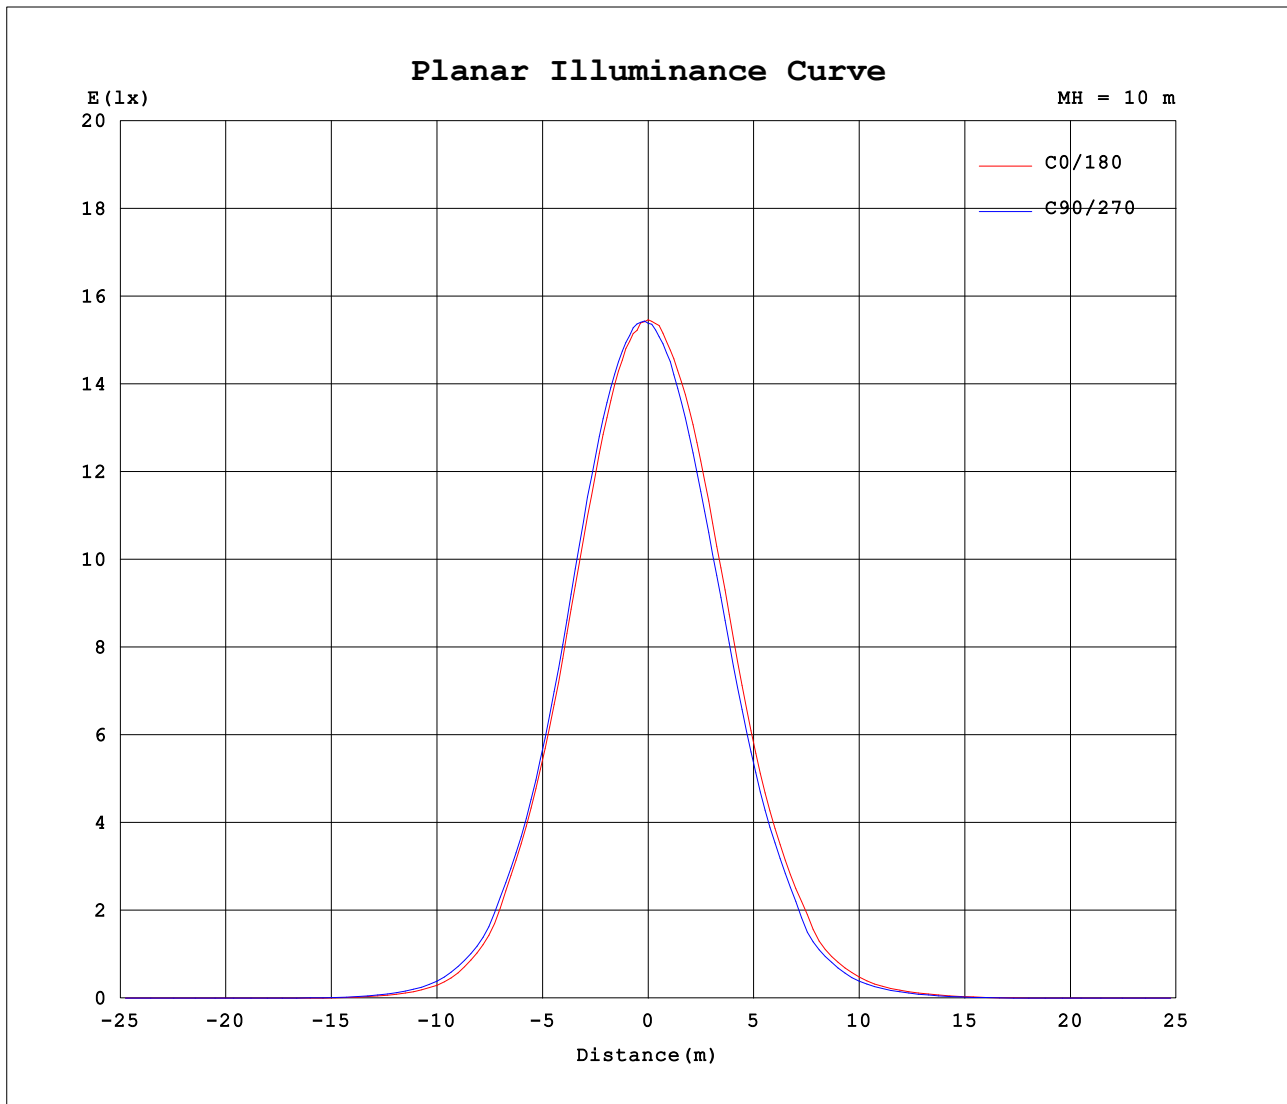

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1252.64x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1547	1546	1539	1536	1547	1546	1539	1536										
5	1515	1521	1528	1537	1514	1508	1488	1479										
10	1426	1433	1457	1478	1440	1418	1384	1366										
15	1272	1286	1319	1364	1309	1278	1232	1196										
20	1069	1075	1110	1186	1122	1097	1038	982										
25	831	833	867	957	887	862	817	763										
30	604	607	631	717	658	627	601	545										
35	375	385	421	504	455	423	401	318										
40	194	208	227	285	247	223	212	174										
45	84.0	90.5	111	160	138	126	110	82.7										
50	35.1	36.1	48.6	74.5	69.4	65.2	55.8	35.9										
55	8.99	9.05	15.3	32.8	30.2	26.2	22.6	9.05										
60	1.26	1.32	2.28	8.21	6.08	4.66	4.18	1.20										
65	0.07	0.08	0.09	0.44	0.24	0.30	0.09	0.07										
70	0.06	0.06	0.07	0.07	0.06	0.06	0.06	0.05										
75	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.03										
80	0.03	0.02	0.03	0.03	0.04	0.03	0.03	0.02										
85	0.01	0.00	0.02	0.02	0.02	0.02	0.01	0.01										
90	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00										
95	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01										
115	0.04	0.03	0.03	0.01	0.02	0.01	0.01	0.02										
120	0.08	0.07	0.07	0.05	0.03	0.03	0.05	0.06										
125	0.14	0.13	0.13	0.10	0.07	0.07	0.09	0.11										
130	0.24	0.23	0.22	0.19	0.14	0.14	0.16	0.19										
135	0.38	0.37	0.34	0.30	0.22	0.23	0.26	0.29										
140	0.52	0.50	0.48	0.44	0.34	0.34	0.38	0.43										
145	0.69	0.67	0.64	0.59	0.47	0.48	0.52	0.57										
150	0.85	0.84	0.78	0.76	0.61	0.63	0.68	0.72										
155	1.01	0.99	0.95	0.92	0.76	0.78	0.84	0.88										
160	1.15	1.14	1.10	1.07	0.92	0.94	0.99	1.04										
165	1.27	1.27	1.24	1.22	1.09	1.10	1.15	1.20										
170	1.38	1.37	1.35	1.33	1.25	1.24	1.28	1.32										
175	1.43	1.42	1.42	1.42	1.36	1.36	1.37	1.41										
180	1.43	1.42	1.43	1.44	1.43	1.42	1.43	1.45										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: