


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.96 lm/W			
MODEL		Imax(cd)	1632	S/MH(C0/180)	0.82
NOMINAL POWER(W)	15W	LOR(%)	100.0	S/MH(C90/270)	0.81
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1325.4	η UP,DN(C0-180)	0.1,50.4
NOMINAL FLUX(lm)	1325.44	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.5
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

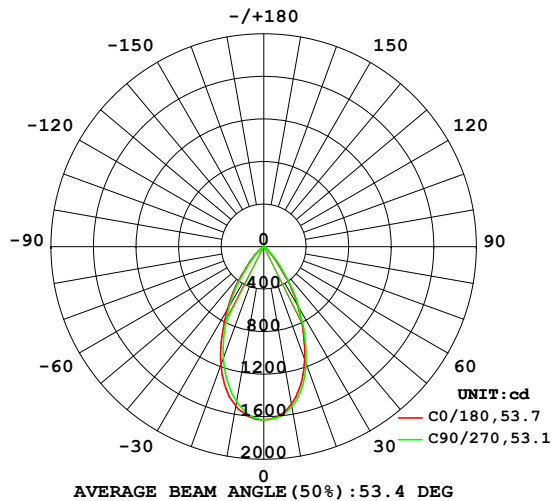

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

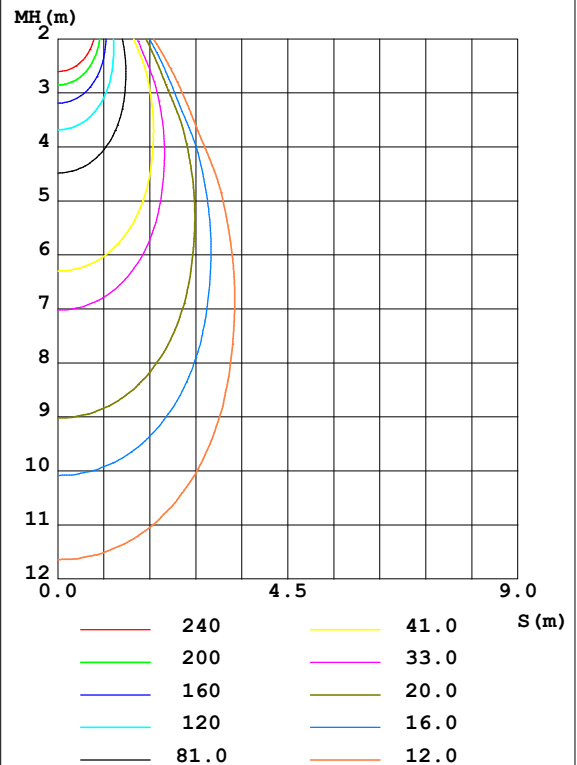

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1505	1504	1525	1556	1521	1509	1477	1452	0- 10	149.6	149.6	11.3,11.3
20	1130	1124	1167	1242	1178	1173	1112	1051	10- 20	375.8	525.4	39.6,39.6
30	640.1	632.3	660.4	747.6	692.9	677.0	649.8	585.1	20- 30	410.3	935.8	70.6,70.6
40	205.3	214.9	238.7	296.1	258.4	243.8	232.1	188.7	30- 40	268.7	1204	90.9,90.9
50	37.72	38.13	52.30	78.95	73.42	70.27	58.75	37.86	40- 50	97.75	1302	98.2,98.2
60	1.354	1.401	2.498	8.675	6.199	4.893	4.299	1.270	50- 60	20.79	1323	99.8,99.8
70	0.0557	0.0557	0.0654	0.0702	0.0582	0.0630	0.0580	0.0461	60- 70	0.7155	1324	99.9,99.9
80	0.0267	0.0291	0.0315	0.0315	0.0266	0.0315	0.0314	0.0194	70- 80	0.0470	1324	99.9,99.9
90	0.0000	0.0097	0.0073	0.0072	0	0.0000	0	0	80- 90	0.0162	1324	99.9,99.9
100	0	0.0000	0.0024	0.0000	0	0	0	0	90-100	0.0016	1324	99.9,99.9
110	0.0170	0.0145	0.0145	0.0097	0.0001	0	0.0024	0.0072	100-110	0.0029	1324	99.9,99.9
120	0.0871	0.0848	0.0798	0.0533	0.0291	0.0338	0.0413	0.0581	110-120	0.0266	1324	99.9,99.9
130	0.2638	0.2691	0.2468	0.2134	0.1407	0.1427	0.1697	0.2033	120-130	0.1081	1324	99.9,99.9
140	0.5662	0.5646	0.5372	0.4823	0.3564	0.3630	0.4023	0.4477	130-140	0.2497	1324	99.9,99.9
150	0.9199	0.9158	0.8690	0.8262	0.6494	0.6609	0.7100	0.7698	140-150	0.3883	1325	99.9,99.9
160	1.237	1.245	1.208	1.168	0.9812	1.002	1.044	1.111	150-160	0.4383	1325	100,100
170	1.470	1.475	1.453	1.439	1.327	1.322	1.354	1.409	160-170	0.3566	1325	100,100
180	1.538	1.538	1.545	1.560	1.533	1.518	1.528	1.548	170-180	0.1404	1325	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

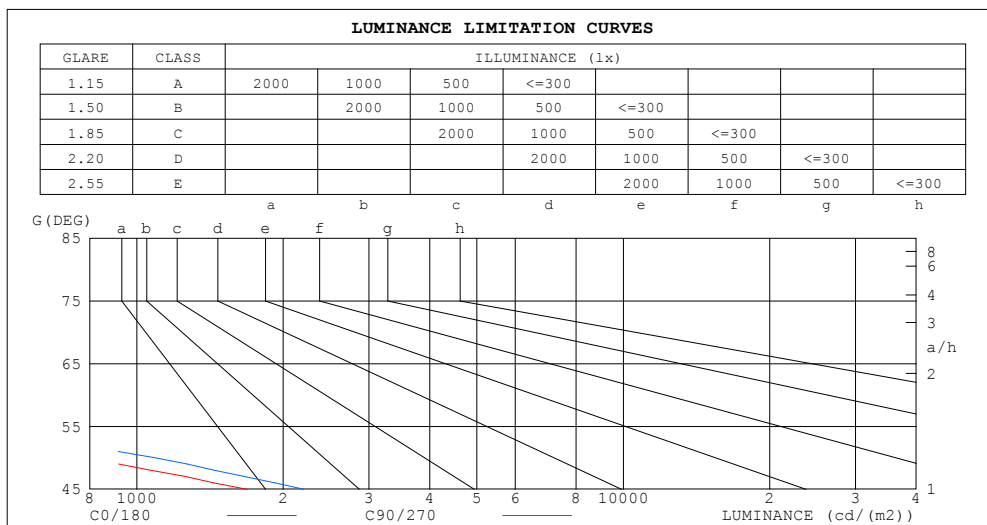


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.87	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.73	.68	.77	.72	.68	.75	.71	.67	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.63	.71	.67	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.56	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.60	.55	.52	.51

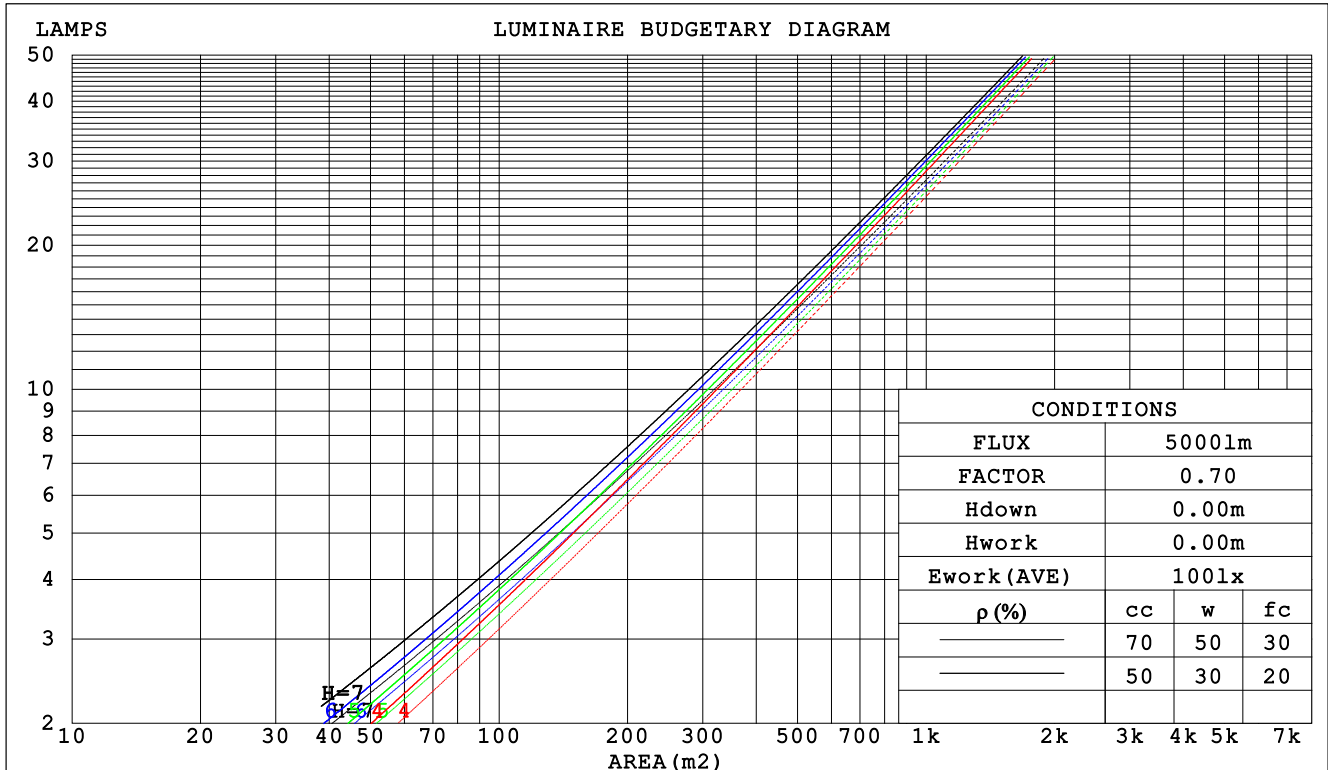

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.157	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.090	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024		
3.0	.162	.086	.026	.157	.084	.025	.148	.080	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.080	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.018	.122	.062	.018	.117	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.117	.060	.017	.113	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.109	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.134	.115	.098	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.043	.097	.062	.037	.067	.043	.027	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.005	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.048	.025	.058	.034	.018	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm										
NAME: WL-2CLD3IN15WB5D3HVWH					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.: 3IN			SERIAL No.:		
MFR.: WS					SUR.:0.024*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.0	10.9	10.2	11.1	11.3	10.4	11.4	10.7	11.6	11.7
3H	9.8	10.7	10.0	10.9	11.1	10.3	11.1	10.5	11.3	11.5
4H	9.7	10.5	10.0	10.7	11.0	10.2	11.0	10.5	11.2	11.5
6H	9.6	10.4	9.9	10.6	10.9	10.1	10.9	10.4	11.1	11.4
8H	9.6	10.3	9.9	10.6	10.8	10.0	10.8	10.4	11.0	11.3
12H	9.5	10.2	9.8	10.5	10.8	10.0	10.7	10.3	11.0	11.3
4H 2H	9.7	10.5	10.0	10.8	11.0	10.2	11.0	10.5	11.2	11.5
3H	9.5	10.2	9.8	10.5	10.8	10.0	10.7	10.3	11.0	11.3
4H	9.4	10.1	9.8	10.4	10.7	9.9	10.5	10.3	10.8	11.2
6H	9.3	9.9	9.7	10.2	10.6	9.8	10.4	10.2	10.7	11.1
8H	9.3	9.8	9.7	10.2	10.5	9.8	10.3	10.2	10.6	11.0
12H	9.2	9.7	9.6	10.1	10.5	9.7	10.2	10.1	10.6	11.0
8H 4H	9.3	9.8	9.7	10.2	10.5	9.8	10.3	10.2	10.6	11.0
6H	9.2	9.6	9.6	10.0	10.4	9.7	10.1	10.1	10.5	10.9
8H	9.1	9.5	9.6	9.9	10.4	9.6	10.0	10.1	10.4	10.8
12H	9.1	9.4	9.5	9.8	10.3	9.5	9.9	10.0	10.3	10.8
12H 4H	9.2	9.7	9.6	10.1	10.5	9.7	10.2	10.1	10.6	11.0
6H	9.1	9.5	9.6	9.9	10.4	9.6	10.0	10.1	10.4	10.8
8H	9.1	9.4	9.5	9.8	10.3	9.5	9.9	10.0	10.3	10.8
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -20.5					+ 3.3 / -16.8				
1.5H	+ 5.1 / -13.3					+ 5.1 / -12.4				
2.0H	+ 6.9 / -32.8					+ 7.2 / -31.4				

CIE Pub.117 Corrected 1325 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

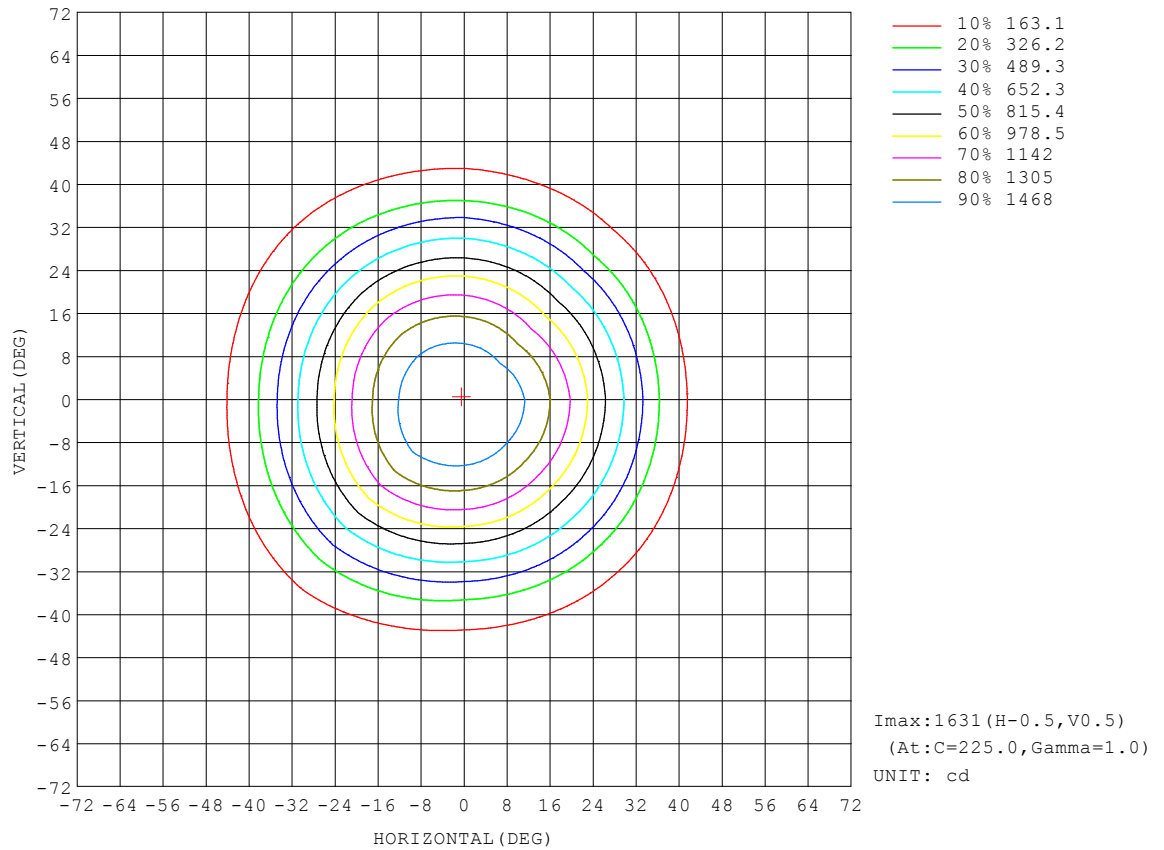


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

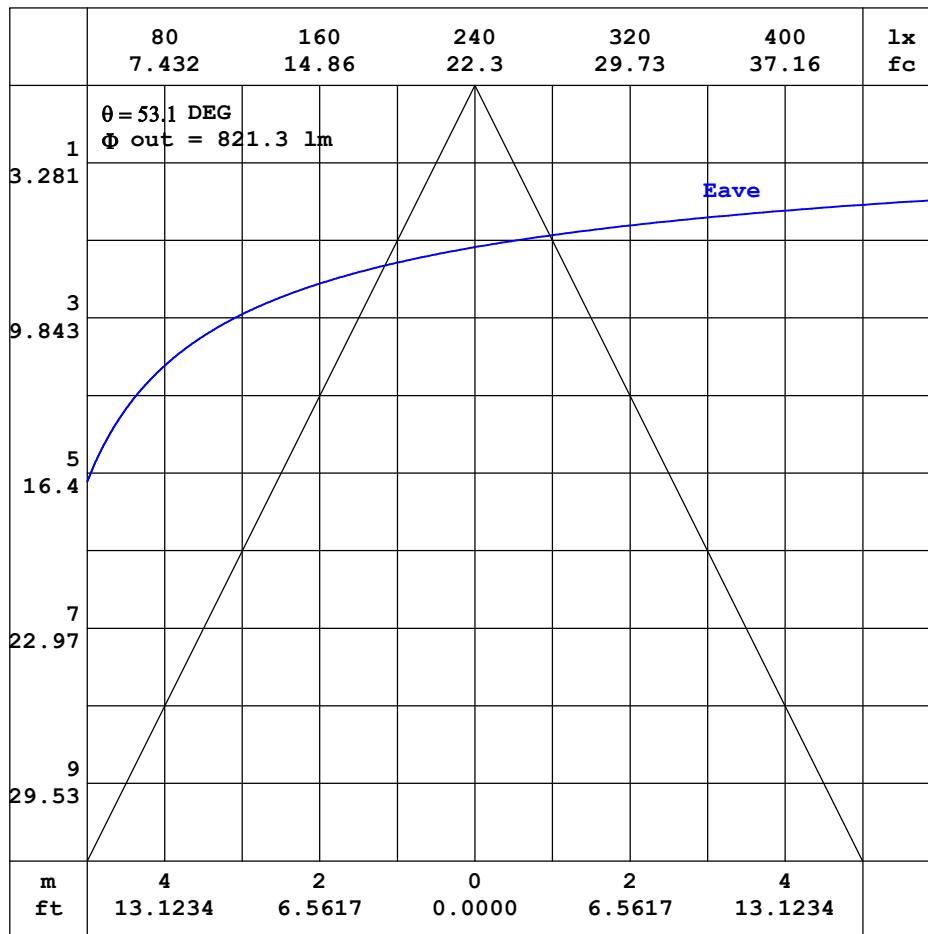


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

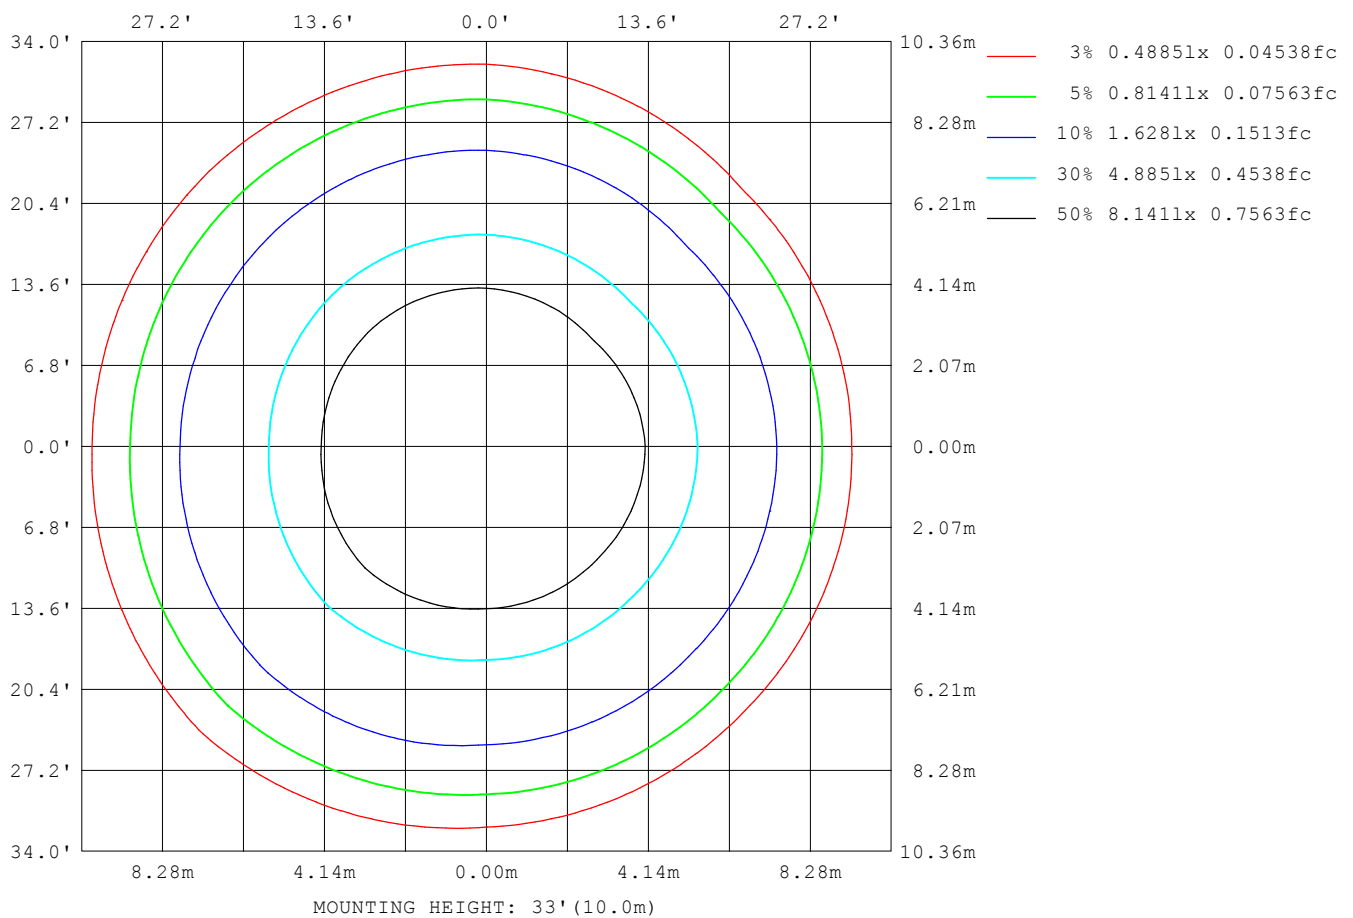

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5
L_0~180 (75) av	2
L_0~180 (85) av	2
L_90~270 (65) av	3
L_90~270 (75) av	2
L_90~270 (85) av	2
L_45 (65) av	7
L_45 (75) av	2
L_45 (85) av	2

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

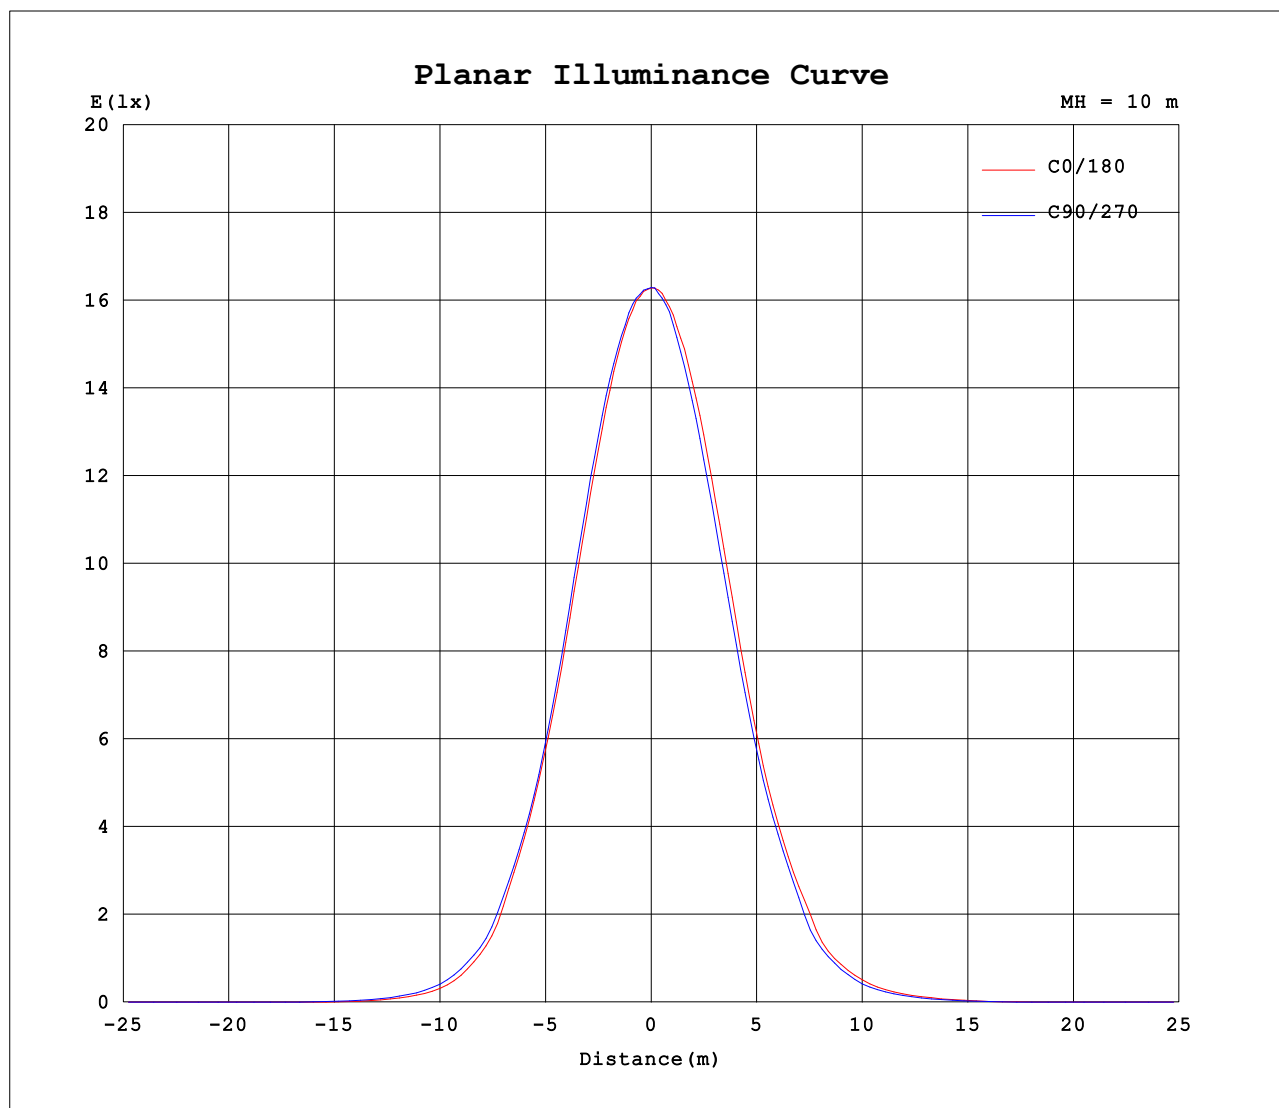

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.3V I:0.1230A P:14.90W PF:0.9940 Freq:60.00Hz Lamp Flux:1325.44x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1628	1628	1629	1622	1628	1628	1629	1622										
5	1596	1601	1609	1618	1603	1601	1592	1566										
10	1505	1504	1525	1556	1521	1509	1477	1452										
15	1345	1350	1379	1428	1381	1365	1319	1278										
20	1130	1124	1167	1242	1178	1173	1112	1051										
25	878	868	908	997	935	926	878	817										
30	640	632	660	748	693	677	650	585										
35	399	400	439	523	479	457	433	343										
40	205	215	239	296	258	244	232	189										
45	89.3	94.4	117	166	145	137	119	88.8										
50	37.7	38.1	52.3	78.9	73.4	70.3	58.7	37.9										
55	9.93	9.84	16.7	35.2	31.5	27.6	23.4	9.45										
60	1.35	1.40	2.50	8.67	6.20	4.89	4.30	1.27										
65	0.08	0.08	0.09	0.47	0.24	0.30	0.08	0.06										
70	0.06	0.06	0.07	0.07	0.06	0.06	0.06	0.05										
75	0.04	0.04	0.05	0.06	0.05	0.05	0.04	0.04										
80	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02										
85	0.01	0.01	0.02	0.02	0.01	0.02	0.01	0.00										
90	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.01										
115	0.04	0.04	0.03	0.02	0.01	0.01	0.01	0.02										
120	0.09	0.08	0.08	0.05	0.03	0.03	0.04	0.06										
125	0.16	0.16	0.14	0.12	0.08	0.08	0.09	0.12										
130	0.26	0.27	0.25	0.21	0.14	0.14	0.17	0.20										
135	0.40	0.40	0.37	0.34	0.24	0.24	0.27	0.31										
140	0.57	0.56	0.54	0.48	0.36	0.36	0.40	0.45										
145	0.73	0.73	0.71	0.66	0.51	0.51	0.55	0.60										
150	0.92	0.92	0.87	0.83	0.65	0.66	0.71	0.77										
155	1.08	1.08	1.03	1.01	0.82	0.83	0.88	0.94										
160	1.24	1.24	1.21	1.17	0.98	1.00	1.04	1.11										
165	1.36	1.37	1.33	1.31	1.16	1.17	1.21	1.27										
170	1.47	1.48	1.45	1.44	1.33	1.32	1.35	1.41										
175	1.54	1.54	1.53	1.53	1.46	1.45	1.48	1.52										
180	1.54	1.54	1.55	1.56	1.53	1.52	1.53	1.55										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: