


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 94.38 lm/W
MODEL		I _{max} (cd)	1718	S/MH(C0/180)	0.81	
NOMINAL POWER(W)	15W	LOR(%)	100.0	S/MH(C90/270)	0.82	
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1396.8	η UP,DN(C0-180)	0.1,49.6	
NOMINAL FLUX(lm)	1396.84	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,50.3	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

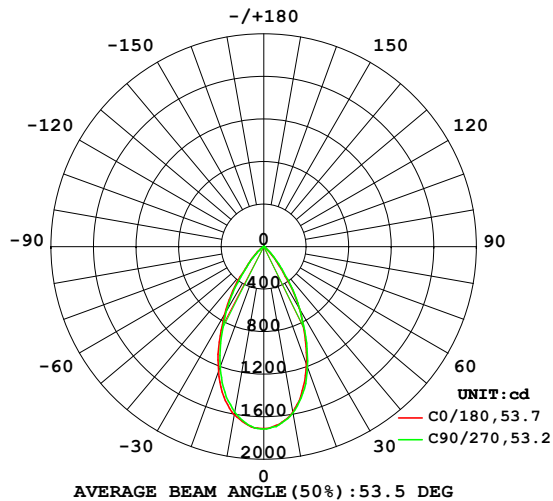

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

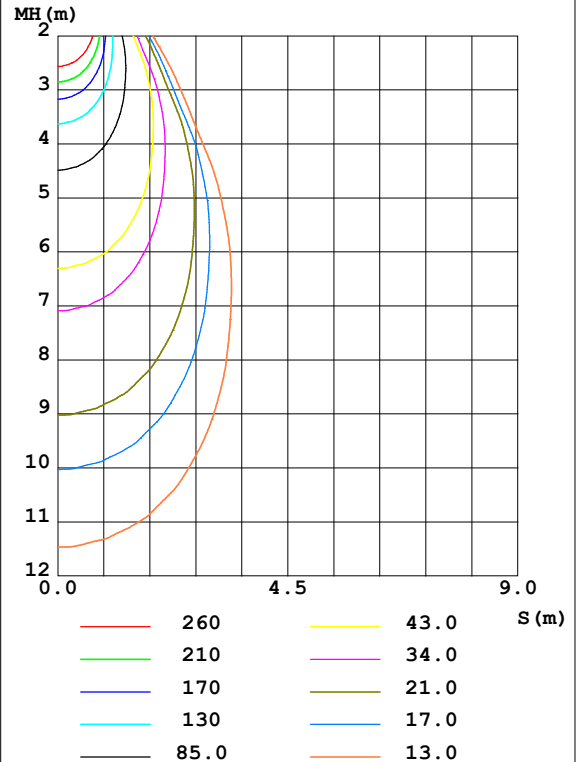

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1576	1570	1585	1628	1604	1602	1579	1540	0- 10	157.4	157.4	11.3,11.3
20	1176	1167	1204	1291	1247	1253	1201	1122	10- 20	395.8	553.1	39.6,39.6
30	673.1	655.1	676.7	774.7	734.2	729.2	711.3	630.8	20- 30	432.7	985.8	70.6,70.6
40	209.9	220.5	240.9	304.5	275.1	267.8	257.2	204.3	30- 40	283.4	1269	90.9,90.9
50	39.12	40.03	54.37	83.22	79.03	74.25	63.29	39.78	40- 50	103.3	1372	98.3,98.3
60	1.395	1.476	2.554	9.358	6.845	5.080	4.644	1.333	50- 60	22.05	1395	99.8,99.8
70	0.0557	0.0533	0.0630	0.0654	0.0629	0.0629	0.0580	0.0485	60- 70	0.7555	1395	99.9,99.9
80	0.0242	0.0242	0.0339	0.0315	0.0315	0.0291	0.0266	0.0242	70- 80	0.0447	1395	99.9,99.9
90	0	0	0.0000	0.0024	0	0.0049	0	0	80- 90	0.0154	1395	99.9,99.9
100	0	0	0	0	0	0.0024	0	0	90-100	0.0004	1395	99.9,99.9
110	0.0072	0.0048	0.0048	0.0000	0.0024	0.0024	0.0024	0.0048	100-110	0.0010	1395	99.9,99.9
120	0.0579	0.0461	0.0411	0.0363	0.0364	0.0339	0.0461	0.0701	110-120	0.0190	1395	99.9,99.9
130	0.1789	0.1745	0.1620	0.1333	0.1480	0.1524	0.1697	0.2153	120-130	0.0864	1395	99.9,99.9
140	0.4017	0.4047	0.3799	0.3441	0.3806	0.3799	0.4145	0.4840	130-140	0.2110	1396	99.9,99.9
150	0.7165	0.7099	0.6995	0.6396	0.6810	0.6948	0.7391	0.8013	140-150	0.3415	1396	99.9,99.9
160	1.031	1.037	1.024	0.9593	0.9983	1.014	1.061	1.119	150-160	0.3991	1396	100,100
170	1.300	1.301	1.307	1.257	1.291	1.295	1.327	1.366	160-170	0.3292	1397	100,100
180	1.443	1.417	1.439	1.429	1.434	1.426	1.441	1.434	170-180	0.1304	1397	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:

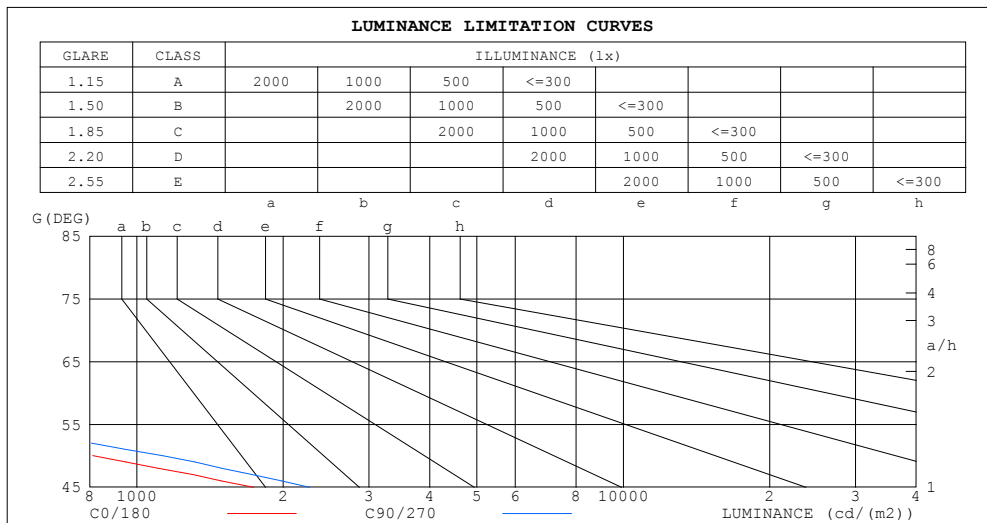

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1	2
80	2	3
75	2	2
70	2	2
65	2	3
60	37	68
55	239	408
50	812	1128
45	1739	2264


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.73	.68	.77	.72	.68	.75	.71	.67	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.63	.71	.67	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.55	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.60	.55	.52	.51

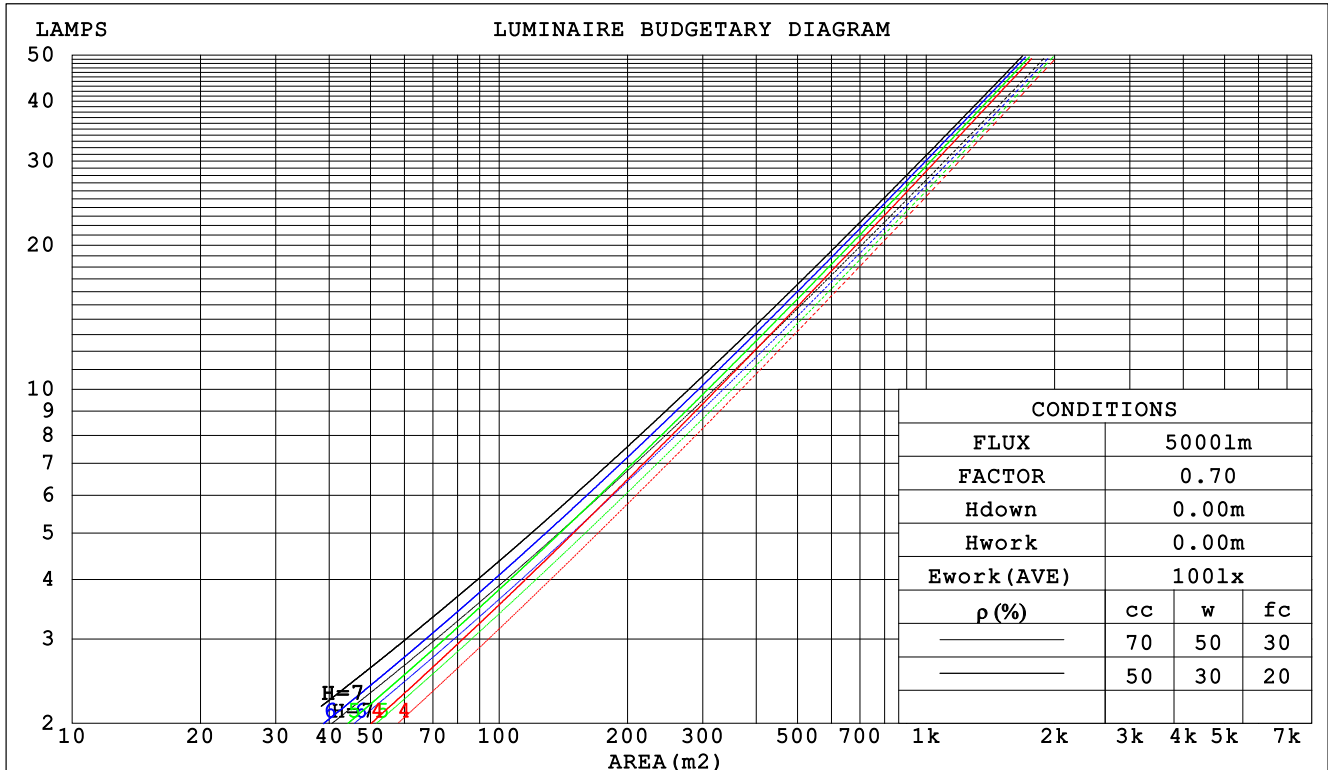

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.158	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.091	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024		
3.0	.162	.086	.026	.158	.084	.025	.148	.080	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.018	.122	.062	.018	.117	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.118	.060	.017	.113	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.134	.115	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.134	.100	.073	.115	.086	.064	.079	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.068	.044	.070	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.063	.040	.023	.037	.023	.014	.012	.008	.004	
9.0	.102	.060	.032	.087	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.048	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm										
NAME: WL-2CLD3IN15WB5D3HVWH					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.: 3IN			SERIAL No.:		
MFR.: WS					SUR.:0.24*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.0	11.0	10.2	11.1	11.3	10.4	11.4	10.7	11.6	11.7
3H	9.8	10.7	10.1	10.9	11.1	10.3	11.1	10.5	11.3	11.5
4H	9.7	10.6	10.0	10.8	11.0	10.2	11.0	10.4	11.2	11.4
6H	9.7	10.4	10.0	10.7	10.9	10.1	10.8	10.4	11.1	11.3
8H	9.6	10.3	9.9	10.6	10.9	10.0	10.8	10.3	11.0	11.3
12H	9.6	10.3	9.9	10.5	10.8	10.0	10.7	10.3	11.0	11.2
4H 2H	9.7	10.6	10.0	10.8	11.0	10.2	11.0	10.5	11.2	11.4
3H	9.6	10.3	9.9	10.5	10.8	10.0	10.7	10.3	11.0	11.2
4H	9.5	10.1	9.8	10.4	10.7	9.9	10.5	10.2	10.8	11.1
6H	9.4	9.9	9.8	10.3	10.6	9.8	10.4	10.2	10.7	11.0
8H	9.3	9.8	9.7	10.2	10.6	9.7	10.3	10.1	10.6	11.0
12H	9.3	9.8	9.7	10.1	10.5	9.7	10.2	10.1	10.5	10.9
8H 4H	9.3	9.8	9.7	10.2	10.6	9.7	10.3	10.1	10.6	11.0
6H	9.2	9.7	9.7	10.0	10.5	9.6	10.1	10.1	10.5	10.9
8H	9.2	9.5	9.6	10.0	10.4	9.6	10.0	10.0	10.4	10.8
12H	9.1	9.4	9.6	9.9	10.4	9.5	9.9	10.0	10.3	10.8
12H 4H	9.3	9.8	9.7	10.1	10.5	9.7	10.2	10.1	10.5	10.9
6H	9.2	9.5	9.6	10.0	10.4	9.6	10.0	10.0	10.4	10.8
8H	9.1	9.4	9.6	9.9	10.4	9.5	9.9	10.0	10.3	10.8
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -20.3					+ 3.2 / -16.6				
1.5H	+ 5.0 / -13.0					+ 5.0 / -12.1				
2.0H	+ 6.8 / -33.7					+ 7.1 / -32.5				

CIE Pub.117 Corrected 1397 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:

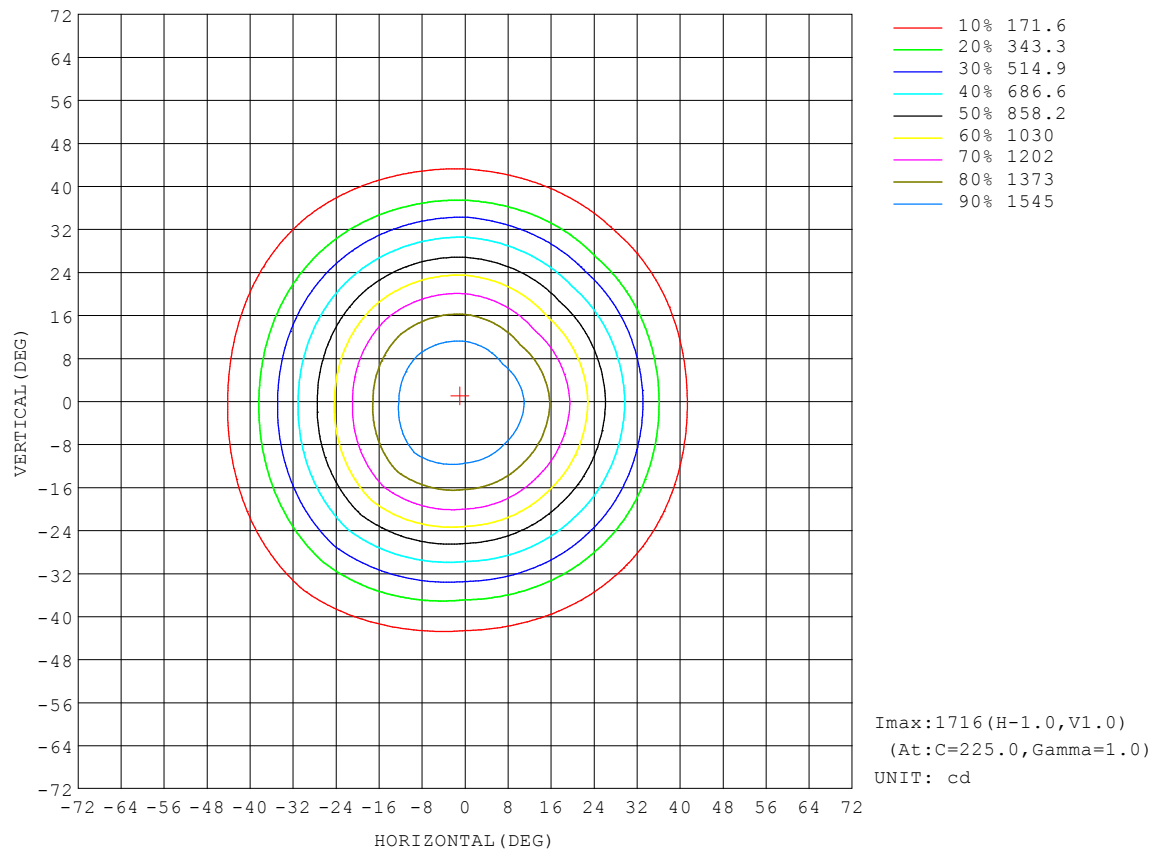


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:

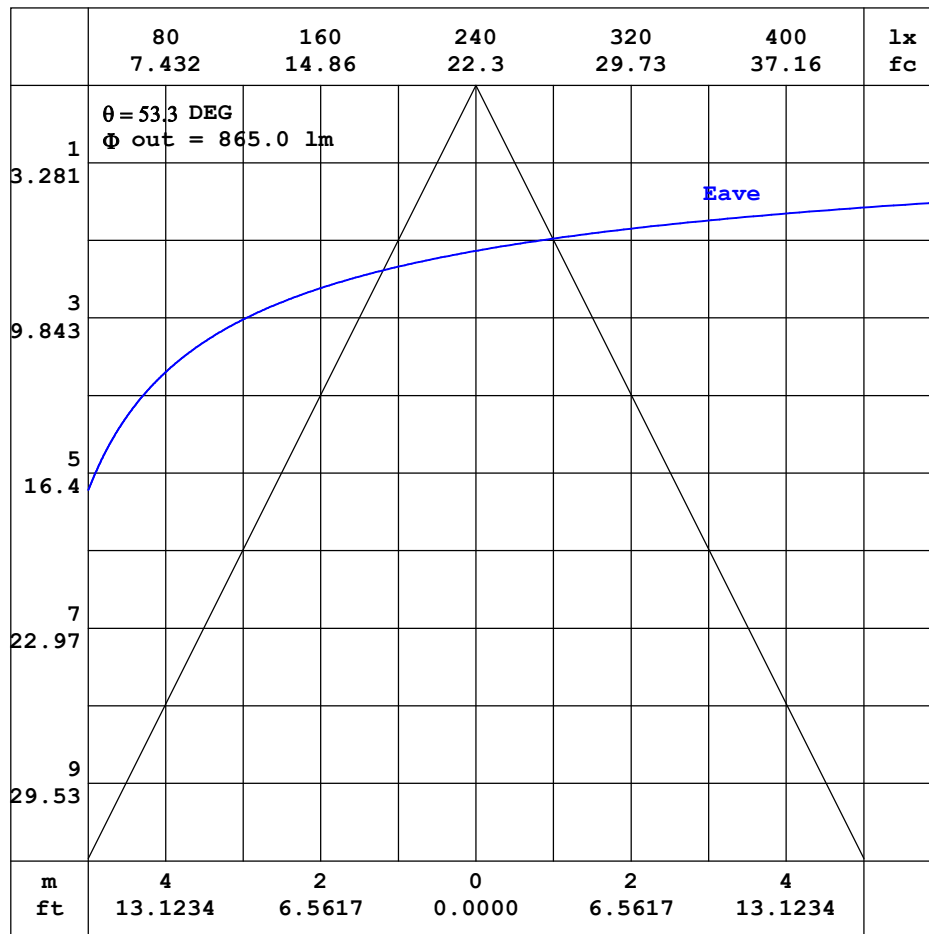


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:

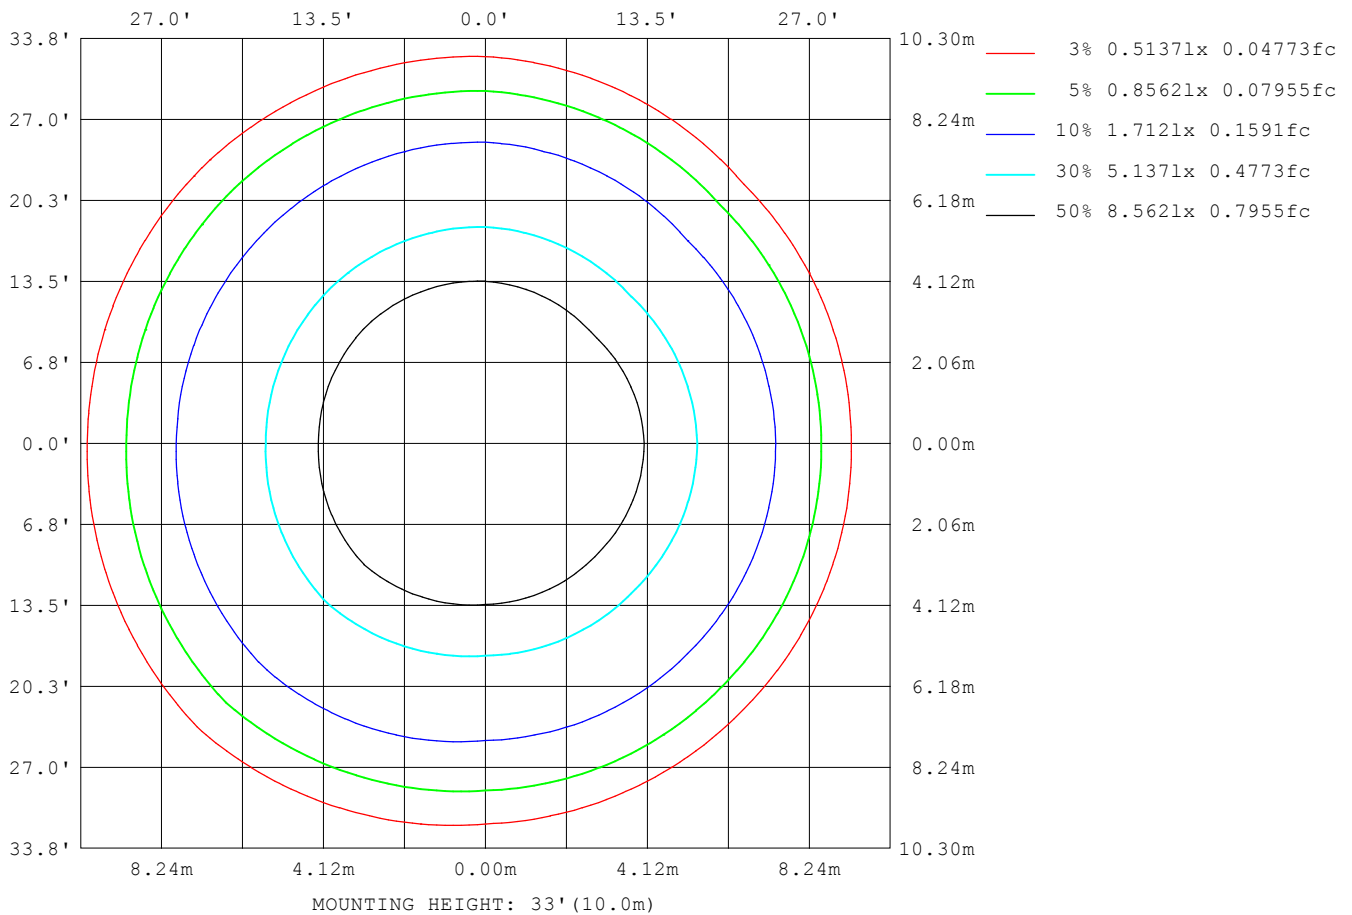

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm		
NAME: WL-2CLD3IN15WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.24*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5
L_0~180 (75) av	2
L_0~180 (85) av	2
L_90~270 (65) av	3
L_90~270 (75) av	2
L_90~270 (85) av	2
L_45 (65) av	7
L_45 (75) av	2
L_45 (85) av	2

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

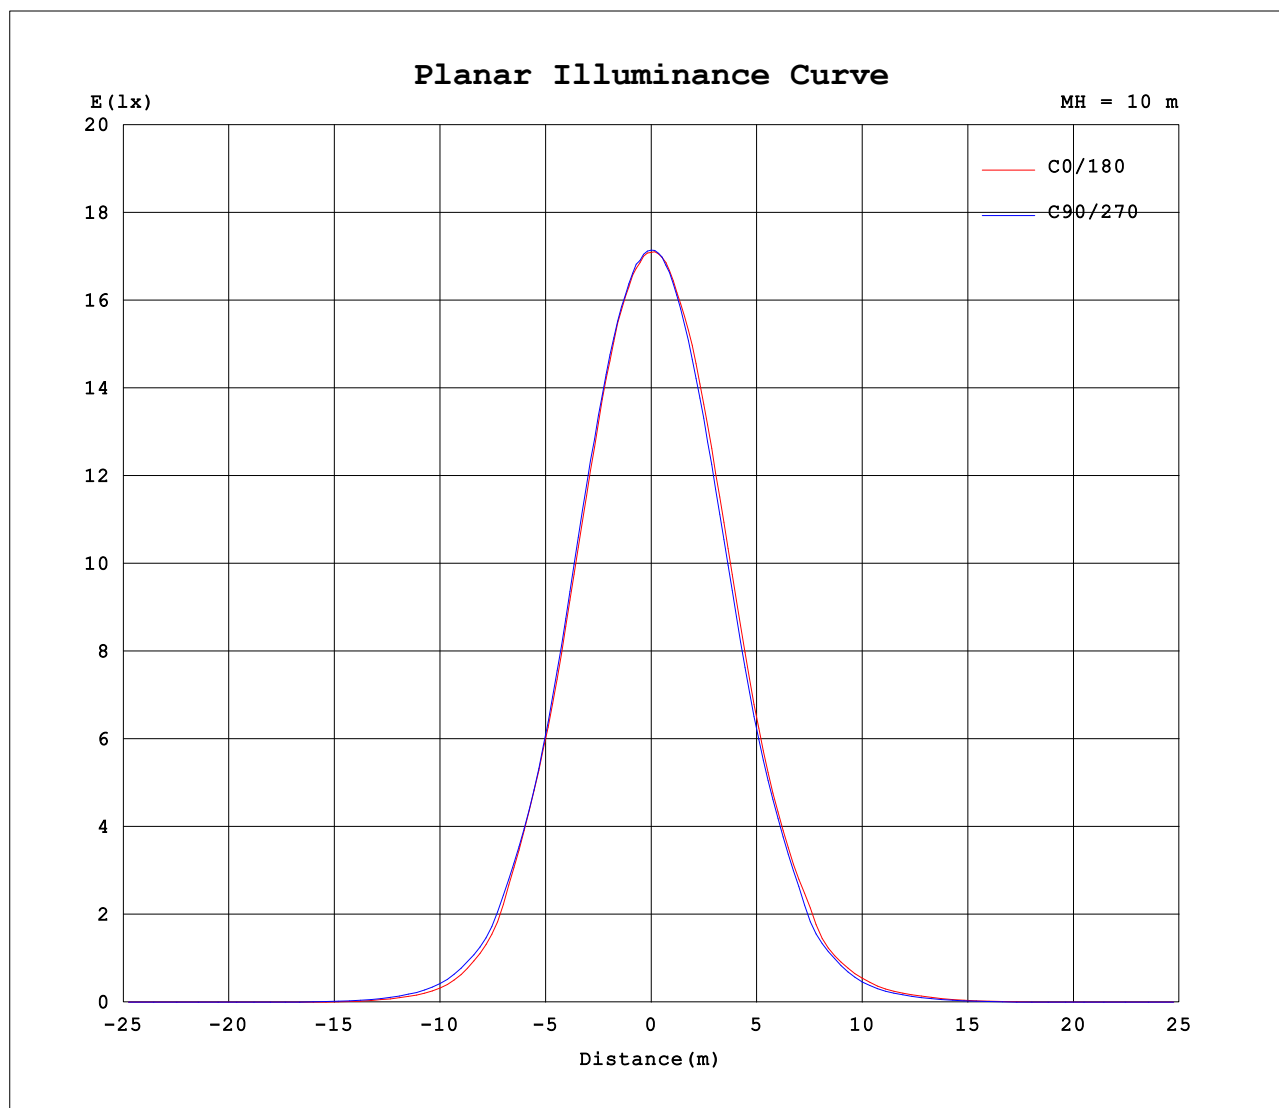

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.3V I:0.1230A P:14.80W PF:0.9940 Freq:60.00Hz Lamp Flux:1396.84x1 lm								
NAME: WL-2CLD3IN15WB5D3HVWH					TYPE:5000K			WEIGHT:
SPEC.:					DIM.: 3IN			SERIAL No.:
MFR.: WS					SUR.:0.24*3.1415			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1709	1711	1715	1712	1709	1711	1715	1712										
5	1677	1676	1681	1695	1687	1692	1683	1654										
10	1576	1570	1585	1628	1604	1602	1579	1540										
15	1404	1402	1424	1487	1460	1457	1417	1359										
20	1176	1167	1204	1291	1247	1253	1201	1122										
25	915	900	936	1038	991	990	949	875										
30	673	655	677	775	734	729	711	631										
35	406	411	444	542	510	494	479	371										
40	210	221	241	305	275	268	257	204										
45	92.2	98.0	120	170	155	150	131	94.6										
50	39.1	40.0	54.4	83.2	79.0	74.2	63.3	39.8										
55	10.3	10.7	17.5	37.5	34.0	29.0	24.9	9.76										
60	1.39	1.48	2.55	9.36	6.84	5.08	4.64	1.33										
65	0.06	0.07	0.09	0.48	0.25	0.32	0.08	0.06										
70	0.06	0.05	0.06	0.07	0.06	0.06	0.06	0.05										
75	0.04	0.03	0.05	0.05	0.05	0.05	0.04	0.04										
80	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02										
85	0.01	0.00	0.01	0.02	0.02	0.02	0.02	0.01										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.02	0.02	0.02	0.01	0.00	0.01	0.02	0.03										
120	0.06	0.05	0.04	0.04	0.04	0.03	0.05	0.07										
125	0.10	0.10	0.09	0.07	0.08	0.08	0.10	0.13										
130	0.18	0.17	0.16	0.13	0.15	0.15	0.17	0.22										
135	0.28	0.28	0.26	0.23	0.25	0.26	0.28	0.33										
140	0.40	0.40	0.38	0.34	0.38	0.38	0.41	0.48										
145	0.55	0.55	0.53	0.48	0.52	0.53	0.57	0.63										
150	0.72	0.71	0.70	0.64	0.68	0.69	0.74	0.80										
155	0.87	0.88	0.85	0.80	0.85	0.85	0.90	0.97										
160	1.03	1.04	1.02	0.96	1.00	1.01	1.06	1.12										
165	1.18	1.17	1.18	1.11	1.16	1.16	1.21	1.26										
170	1.30	1.30	1.31	1.26	1.29	1.30	1.33	1.37										
175	1.39	1.39	1.39	1.36	1.40	1.39	1.41	1.43										
180	1.44	1.42	1.44	1.43	1.43	1.43	1.44	1.43										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: