


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 96.46 lm/W
MODEL		I _{max} (cd)	1125	S/MH (C0/180)	0.81	
NOMINAL POWER(W)	9W	LOR(%)	100.0	S/MH (C90/270)	0.82	
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	916.35	η UP,DN (C0-180)	0.1,49.8	
NOMINAL FLUX(lm)	916.354	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.1,50.0	
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	120.0	η down (%)	99.9	CIBSE SHR MAX	0.85	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

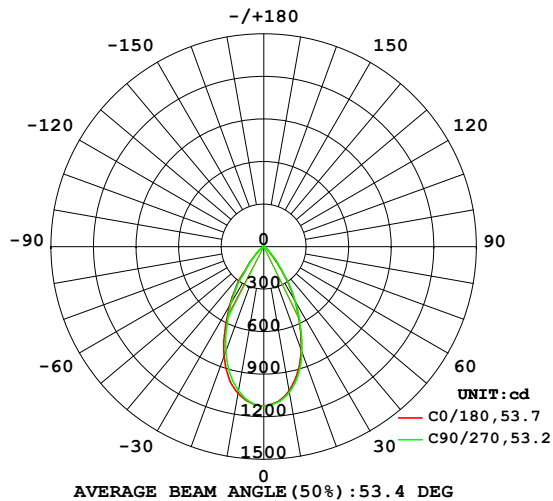

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

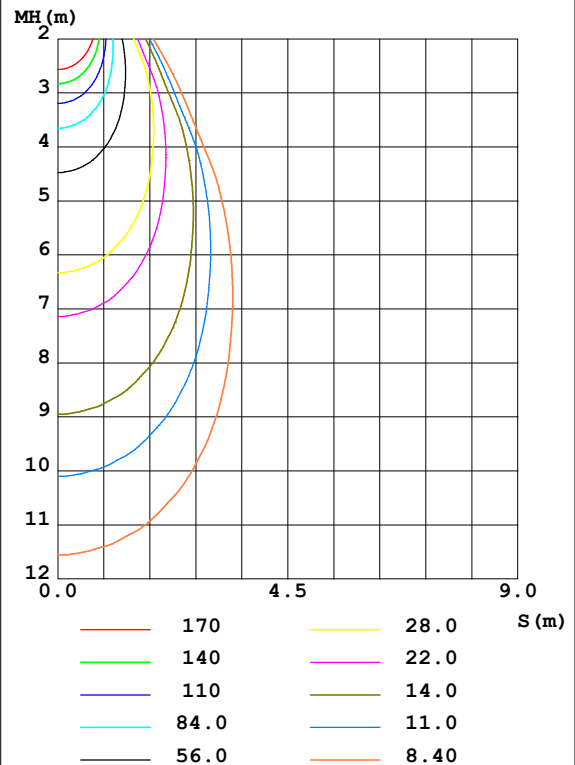

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1032	1035	1044	1069	1050	1048	1033	1002	0- 10	103.2	103.2	11.3,11.3
20	771.8	771.4	789.9	850.9	819.6	814.8	784.6	729.6	10- 20	259.5	362.6	39.6,39.6
30	439.5	434.7	446.3	512.5	482.8	472.1	462.4	410.1	20- 30	283.5	646.1	70.5,70.5
40	139.5	145.1	159.7	202.2	181.1	173.3	167.0	133.4	30- 40	186.3	832.4	90.8,90.8
50	25.86	26.53	35.79	54.93	51.90	48.94	41.58	26.33	40- 50	67.71	900.1	98.2,98.2
60	0.9307	0.9928	1.716	6.172	4.528	3.385	3.095	0.8931	50- 60	14.54	914.6	99.8,99.8
70	0.0340	0.0387	0.0436	0.0461	0.0411	0.0436	0.0387	0.0363	60- 70	0.5053	915.1	99.9,99.9
80	0.0145	0.0144	0.0146	0.0338	0.0170	0.0267	0.0146	0.0170	70- 80	0.0315	915.2	99.9,99.9
90	0.0001	0	0	0.0120	0.0048	0	0	0	80- 90	0.0091	915.2	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0.0004	915.2	99.9,99.9
110	0.0120	0.0073	0.0024	0.0024	0.0001	0.0048	0	0.0072	100-110	0.0010	915.2	99.9,99.9
120	0.0556	0.0557	0.0459	0.0388	0.0122	0.0242	0.0243	0.0387	110-120	0.0157	915.2	99.9,99.9
130	0.1766	0.1745	0.1646	0.1431	0.1018	0.0992	0.1115	0.1307	120-130	0.0707	915.3	99.9,99.9
140	0.3751	0.3853	0.3630	0.3320	0.2401	0.2492	0.2667	0.3146	130-140	0.1700	915.4	99.9,99.9
150	0.6222	0.6323	0.5931	0.5694	0.4555	0.4600	0.4895	0.5375	140-150	0.2673	915.7	99.9,99.9
160	0.8427	0.8478	0.8305	0.8163	0.6833	0.6948	0.7292	0.7700	150-160	0.3026	916.0	100,100
170	1.017	1.017	1.010	1.003	0.9181	0.9177	0.9399	0.9783	160-170	0.2468	916.3	100,100
180	1.056	1.058	1.075	1.087	1.063	1.061	1.063	1.083	170-180	0.0972	916.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVVH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

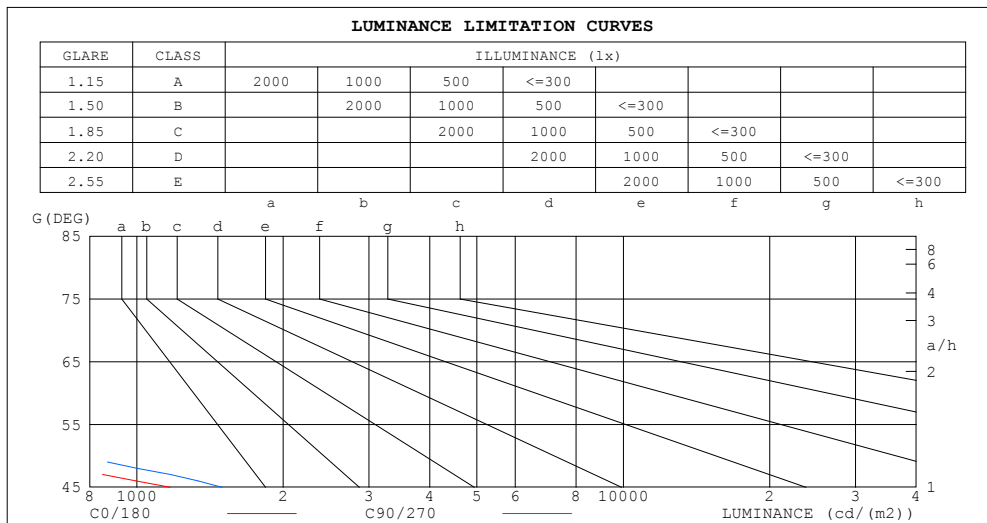

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	1
80	1	1
75	1	2
70	1	2
65	1	2
60	25	46
55	158	269
50	536	742
45	1171	1496


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.72	.68	.77	.72	.68	.75	.71	.67	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.55	.54
10.0	.62	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.52	.60	.55	.52	.51

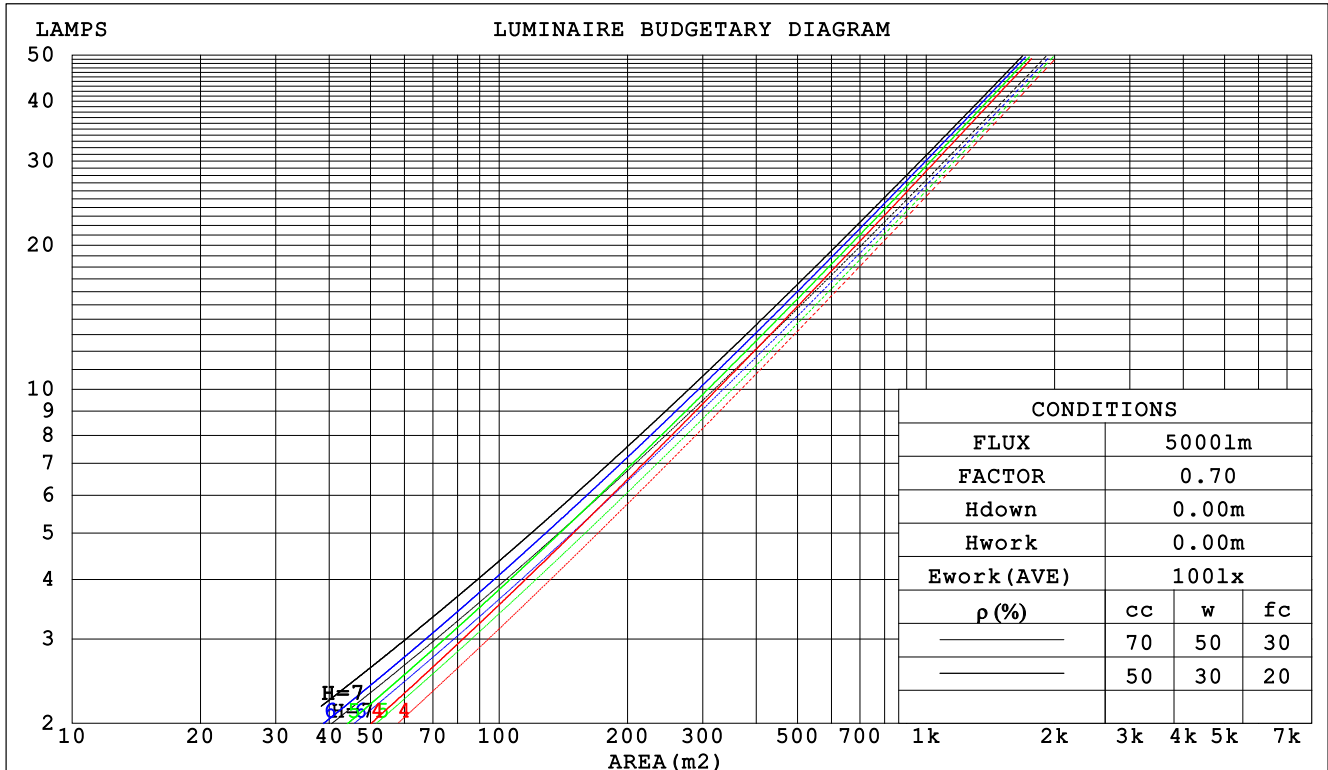

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.158	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.091	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024		
3.0	.162	.086	.026	.158	.084	.025	.148	.080	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.018	.122	.063	.018	.117	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.118	.060	.017	.113	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.134	.115	.098	.092	.079	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.005	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.048	.025	.058	.034	.018	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm										
NAME: WL-2CLD3IN9WB5D3HVWH					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 3IN			SERIAL No.:		
MFR.: WS					SUR.:0.024*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.6	9.5	8.8	9.7	9.9	9.0	10.0	9.2	10.1	10.3
3H	8.4	9.3	8.7	9.5	9.7	8.8	9.7	9.1	9.9	10.1
4H	8.3	9.2	8.6	9.4	9.6	8.7	9.6	9.0	9.8	10.0
6H	8.2	9.0	8.5	9.3	9.5	8.7	9.4	9.0	9.7	9.9
8H	8.2	8.9	8.5	9.2	9.5	8.6	9.3	8.9	9.6	9.9
12H	8.1	8.9	8.5	9.1	9.4	8.6	9.3	8.9	9.5	9.8
4H 2H	8.3	9.2	8.6	9.4	9.6	8.7	9.6	9.0	9.8	10.0
3H	8.1	8.9	8.5	9.1	9.4	8.6	9.3	8.9	9.5	9.8
4H	8.1	8.7	8.4	9.0	9.3	8.5	9.1	8.8	9.4	9.7
6H	8.0	8.5	8.3	8.9	9.2	8.4	8.9	8.8	9.3	9.6
8H	7.9	8.4	8.3	8.8	9.2	8.3	8.8	8.7	9.2	9.6
12H	7.9	8.3	8.3	8.7	9.1	8.3	8.7	8.7	9.1	9.5
8H 4H	7.9	8.4	8.3	8.8	9.2	8.3	8.8	8.7	9.2	9.6
6H	7.8	8.2	8.2	8.6	9.0	8.2	8.6	8.7	9.0	9.5
8H	7.8	8.1	8.2	8.5	9.0	8.2	8.5	8.6	9.0	9.4
12H	7.7	8.0	8.2	8.5	8.9	8.1	8.4	8.6	8.9	9.3
12H 4H	7.9	8.3	8.3	8.7	9.1	8.3	8.7	8.7	9.1	9.5
6H	7.8	8.1	8.2	8.5	9.0	8.2	8.5	8.6	9.0	9.4
8H	7.7	8.0	8.2	8.5	8.9	8.1	8.4	8.6	8.9	9.3
Variations with the observer position at spacings:										
S = 1.0H	+ 3.1 / -20.4					+ 3.2 / -16.5				
1.5H	+ 5.1 / -13.0					+ 5.0 / -12.1				
2.0H	+ 6.9 / -33.2					+ 7.1 / -32.0				

CIE Pub.117 Corrected 916.4 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	94	87	83	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

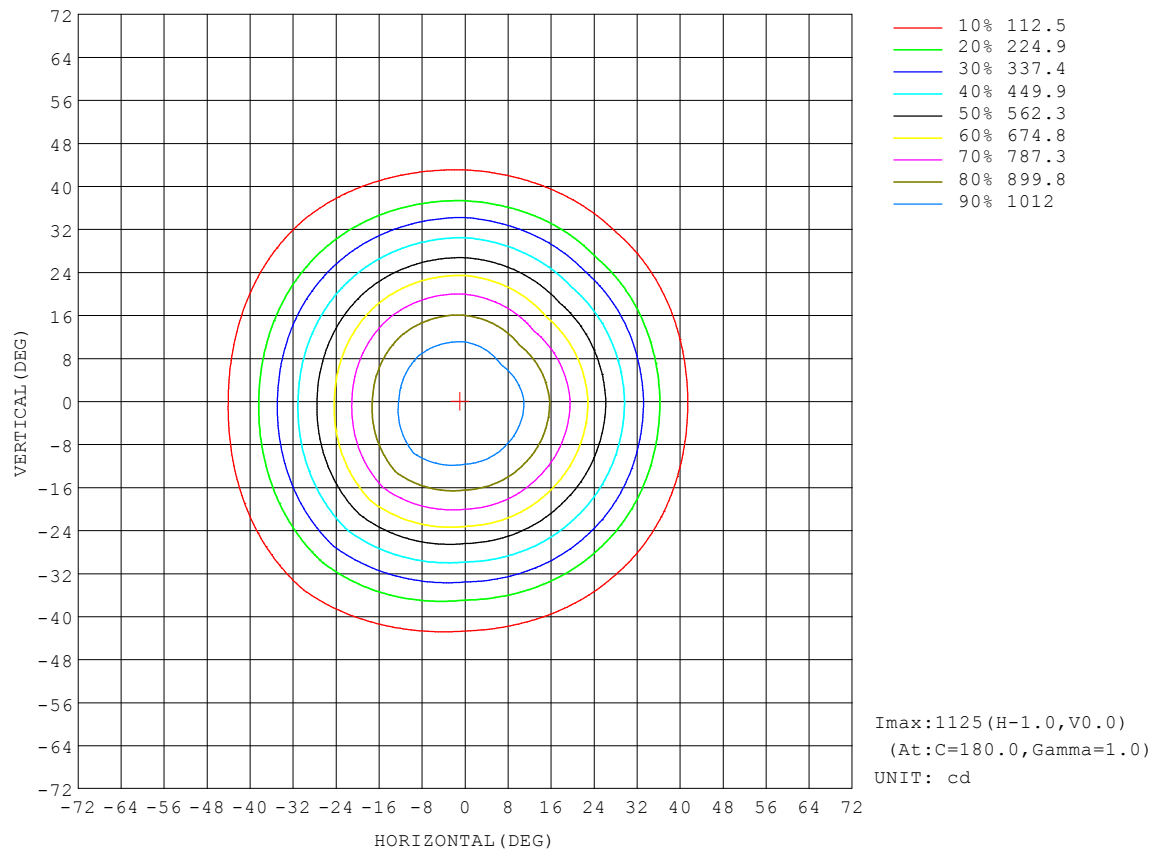


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

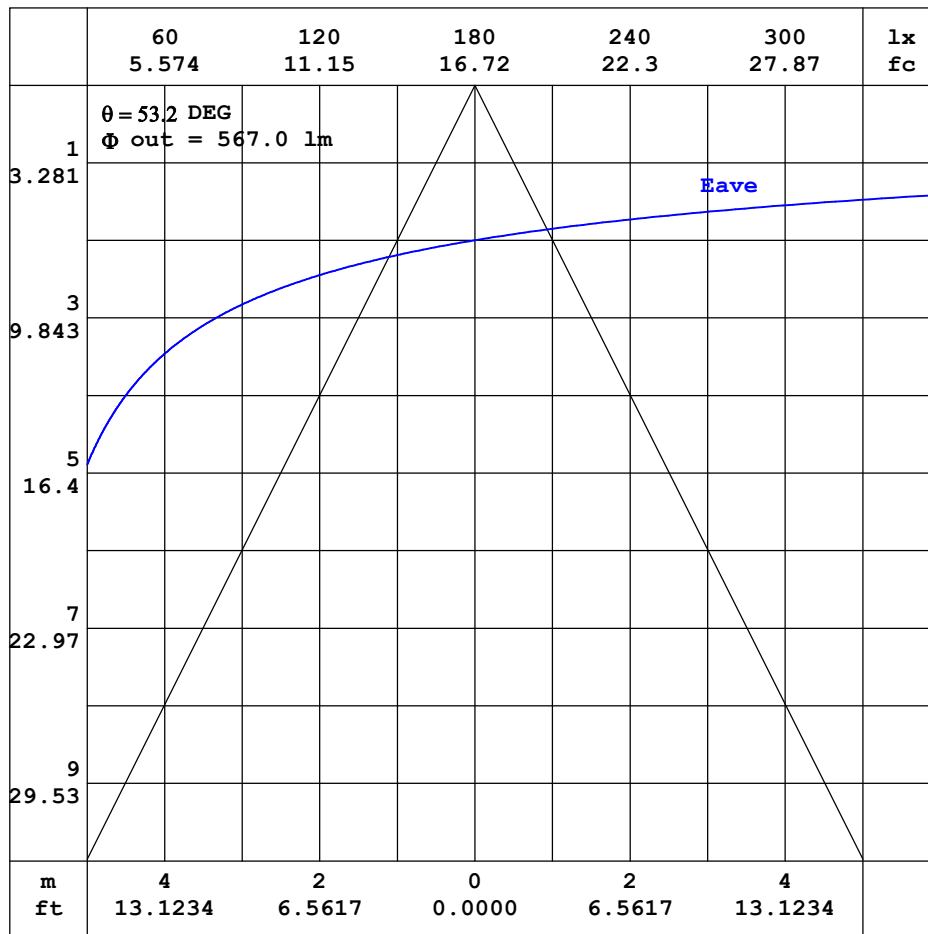


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

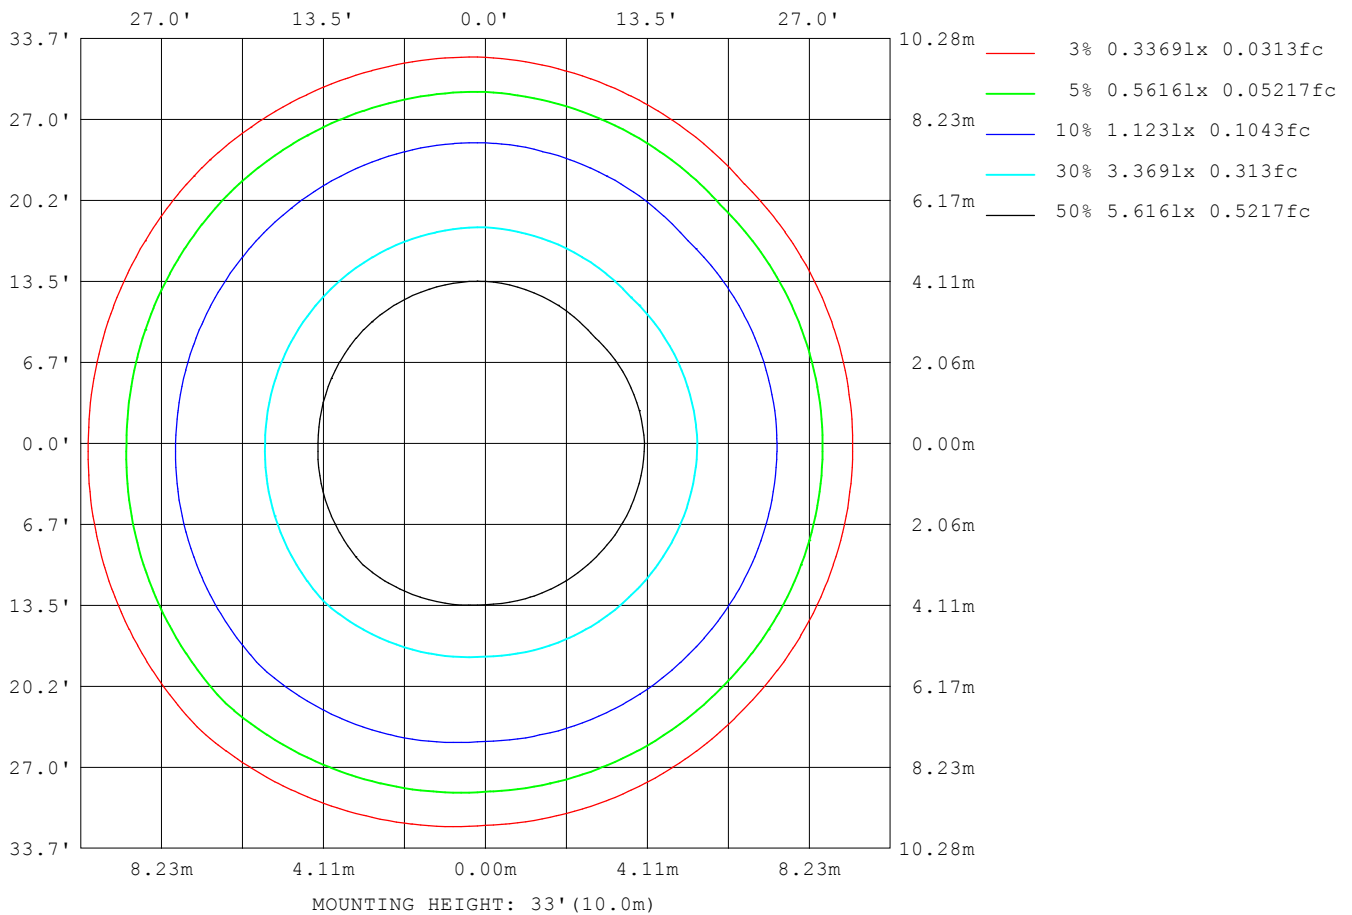

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3
L_0~180 (75) av	1
L_0~180 (85) av	1
L_90~270 (65) av	2
L_90~270 (75) av	1
L_90~270 (85) av	1
L_45 (65) av	5
L_45 (75) av	2
L_45 (85) av	2

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

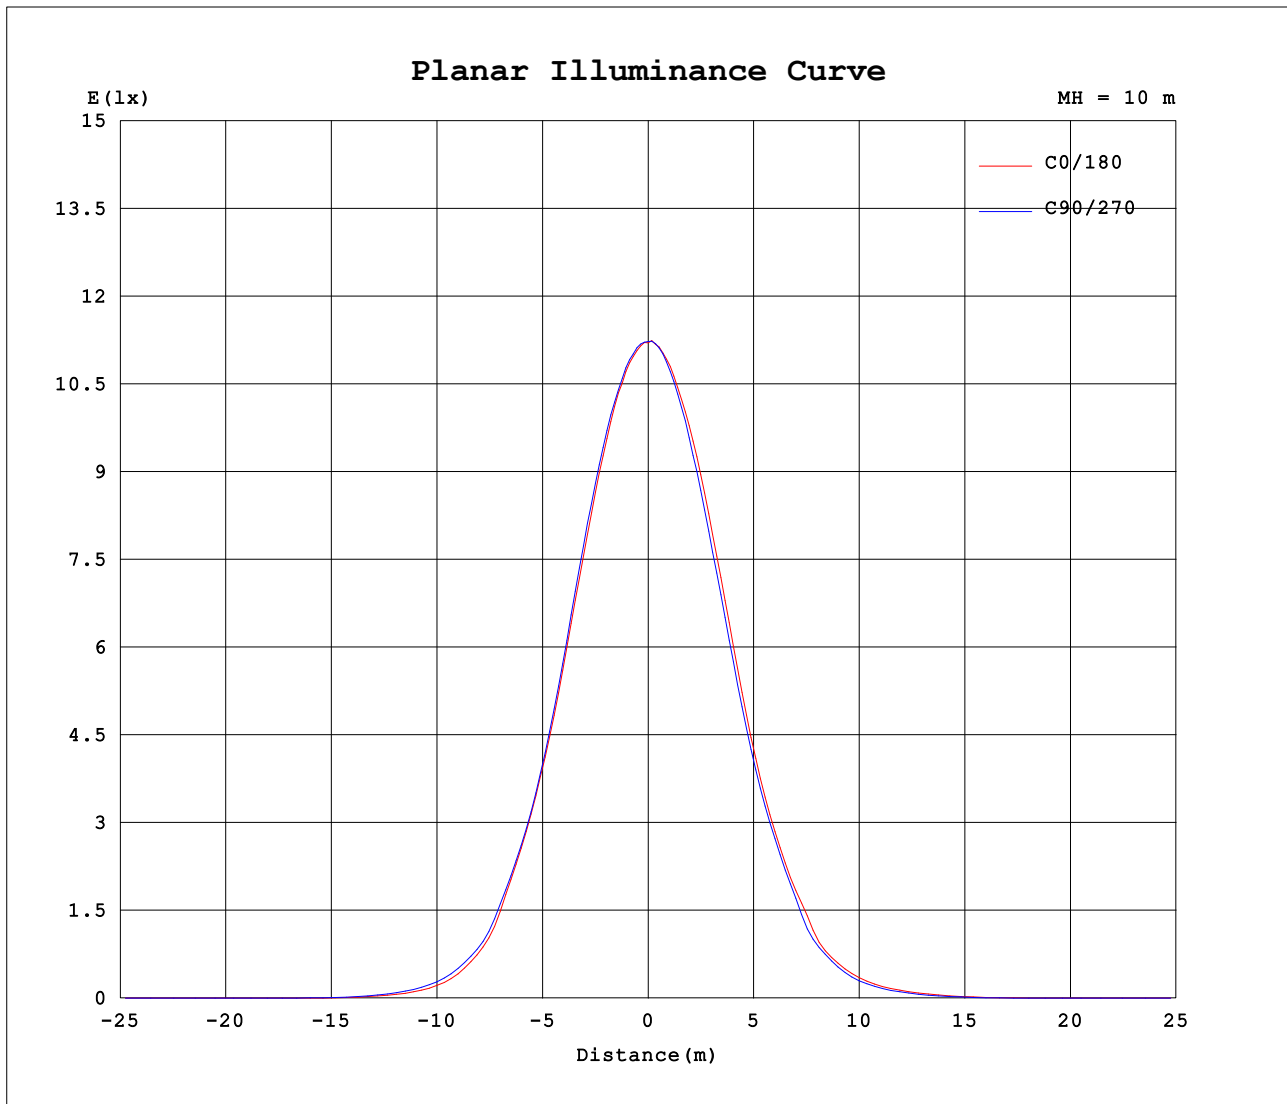

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.4V I:0.0780A P:9.500W PF:0.9910 Freq:60.00Hz Lamp Flux:916.354x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1120	1123	1122	1119	1120	1123	1122	1119										
5	1099	1101	1104	1115	1105	1106	1100	1084										
10	1032	1035	1044	1069	1050	1048	1033	1002										
15	921	924	939	982	959	950	927	887										
20	772	771	790	851	820	815	785	730										
25	601	596	614	685	651	643	619	568										
30	440	435	446	513	483	472	462	410										
35	271	273	294	359	335	322	311	242										
40	139	145	160	202	181	173	167	133										
45	62.1	65.1	79.3	111	99.5	97.1	85.0	63.2										
50	25.9	26.5	35.8	54.9	51.9	48.9	41.6	26.3										
55	6.78	6.98	11.6	24.7	22.3	19.2	16.5	6.53										
60	0.93	0.99	1.72	6.17	4.53	3.38	3.09	0.89										
65	0.05	0.05	0.06	0.34	0.18	0.21	0.06	0.05										
70	0.03	0.04	0.04	0.05	0.04	0.04	0.04	0.04										
75	0.02	0.03	0.03	0.04	0.03	0.03	0.03	0.03										
80	0.01	0.01	0.01	0.03	0.02	0.03	0.01	0.02										
85	0.00	0.00	0.01	0.02	0.01	0.02	0.01	0.00										
90	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01										
115	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.02										
120	0.06	0.06	0.05	0.04	0.01	0.02	0.02	0.04										
125	0.10	0.10	0.08	0.07	0.05	0.05	0.06	0.08										
130	0.18	0.17	0.16	0.14	0.10	0.10	0.11	0.13										
135	0.27	0.27	0.26	0.23	0.16	0.17	0.19	0.22										
140	0.38	0.39	0.36	0.33	0.24	0.25	0.27	0.31										
145	0.51	0.50	0.49	0.45	0.35	0.36	0.38	0.42										
150	0.62	0.63	0.59	0.57	0.46	0.46	0.49	0.54										
155	0.74	0.74	0.72	0.70	0.56	0.57	0.61	0.66										
160	0.84	0.85	0.83	0.82	0.68	0.69	0.73	0.77										
165	0.94	0.95	0.93	0.92	0.80	0.81	0.84	0.89										
170	1.02	1.02	1.01	1.00	0.92	0.92	0.94	0.98										
175	1.06	1.05	1.06	1.06	1.01	1.00	1.02	1.06										
180	1.06	1.06	1.08	1.09	1.06	1.06	1.06	1.08										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: