


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.30 lm/W
MODEL		I _{max} (cd)	1143	S/MH(C0/180)	0.81	
NOMINAL POWER(W)	9W	LOR(%)	100.0	S/MH(C90/270)	0.82	
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	931.91	η UP,DN(C0-180)	0.1,49.6	
NOMINAL FLUX(lm)	931.906	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,50.2	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

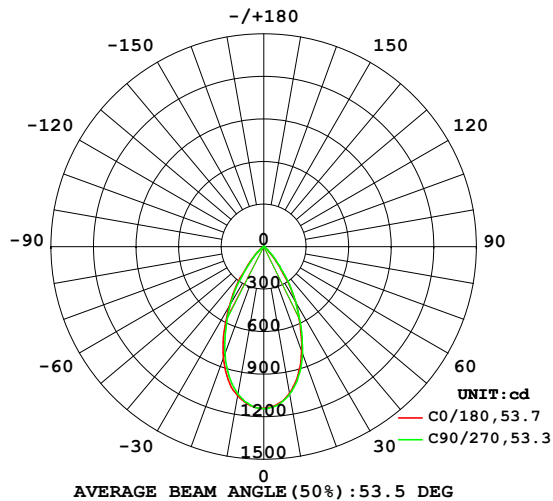

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

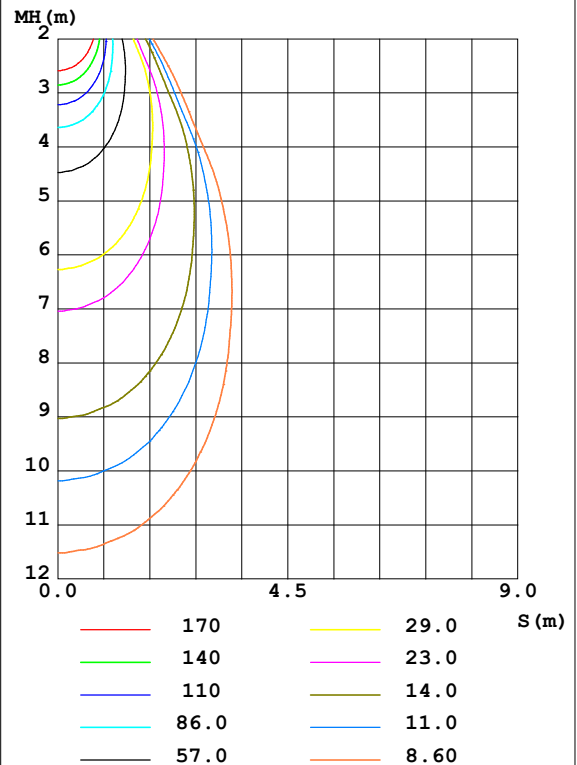

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1049	1048	1056	1085	1067	1068	1054	1023	0- 10	104.9	104.9	11.3,11.3
20	783.9	780.5	799.2	862.4	833.7	833.0	803.8	746.3	10- 20	263.8	368.7	39.6,39.6
30	447.7	438.7	451.6	518.5	490.2	482.6	474.1	419.7	20- 30	288.4	657.1	70.5,70.5
40	140.3	146.0	161.2	203.7	183.6	178.8	171.8	137.0	30- 40	189.4	846.5	90.8,90.8
50	26.26	26.88	36.60	55.88	52.71	50.13	42.31	26.78	40- 50	68.91	915.4	98.2,98.2
60	0.9551	1.005	1.748	6.319	4.588	3.416	3.116	0.9028	50- 60	14.81	930.2	99.8,99.8
70	0.0412	0.0411	0.0412	0.0437	0.0460	0.0484	0.0460	0.0339	60- 70	0.5155	930.8	99.9,99.9
80	0.0121	0.0194	0.0217	0.0266	0.0194	0.0242	0.0217	0.0145	70- 80	0.0311	930.8	99.9,99.9
90	0	0	0	0.0024	0	0.0001	0.0001	0.0048	80- 90	0.0099	930.8	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0.0004	930.8	99.9,99.9
110	0.0024	0.0073	0	0.0024	0	0	0	0.0048	100-110	0.0004	930.8	99.9,99.9
120	0.0483	0.0460	0.0362	0.0339	0.0194	0.0242	0.0267	0.0484	110-120	0.0130	930.8	99.9,99.9
130	0.1572	0.1552	0.1476	0.1164	0.1019	0.0944	0.1163	0.1428	120-130	0.0662	930.9	99.9,99.9
140	0.3339	0.3416	0.3315	0.2884	0.2569	0.2517	0.2740	0.3146	130-140	0.1591	931.0	99.9,99.9
150	0.5592	0.5694	0.5471	0.5160	0.4580	0.4720	0.4895	0.5423	140-150	0.2530	931.3	99.9,99.9
160	0.7868	0.7897	0.7748	0.7437	0.6856	0.6925	0.7268	0.7700	150-160	0.2904	931.6	100,100
170	0.9588	0.9568	0.9542	0.9422	0.9180	0.9056	0.9324	0.9638	160-170	0.2380	931.8	100,100
180	1.024	1.024	1.037	1.037	1.022	1.017	1.032	1.041	170-180	0.0940	931.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

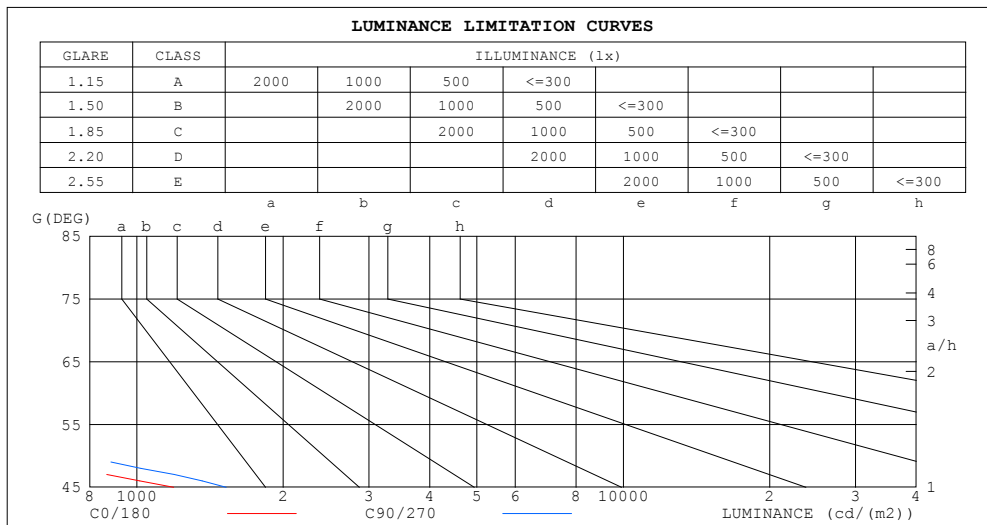

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1	2
80	1	2
75	1	1
70	2	2
65	2	2
60	25	47
55	162	278
50	545	759
45	1190	1526


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.72	.68	.77	.72	.68	.75	.71	.67	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.55	.54
10.0	.62	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.52	.60	.55	.52	.51

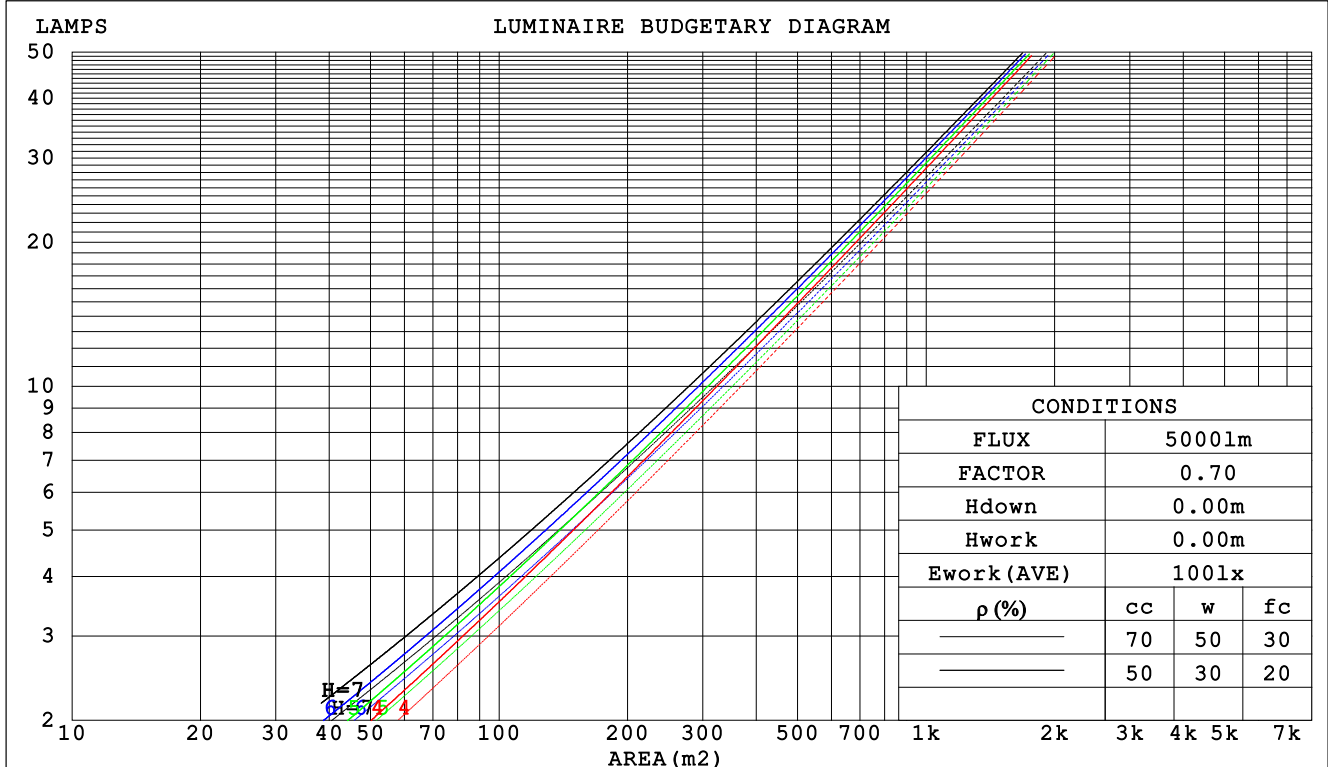

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm					
NAME: WL-2CLD3IN9WB5D3HVWH			TYPE:5000K		WEIGHT:
SPEC.:			DIM.: 3IN		SERIAL No.:
MFR.: WS			SUR.:0.024*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.158	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.091	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024		
3.0	.162	.086	.026	.158	.084	.025	.149	.080	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.018	.122	.063	.018	.117	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.118	.060	.017	.113	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.134	.115	.098	.092	.079	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.115	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.068	.044	.070	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.048	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm										
NAME: WL-2CLD3IN9WB5D3HVWH					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.: 3IN			SERIAL No.:		
MFR.: WS					SUR.:0.024*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.6	9.6	8.8	9.7	9.9	9.0	10.0	9.3	10.1	10.3
3H	8.4	9.3	8.7	9.5	9.7	8.8	9.7	9.1	9.9	10.1
4H	8.4	9.2	8.6	9.4	9.6	8.8	9.6	9.0	9.8	10.0
6H	8.3	9.0	8.6	9.3	9.5	8.7	9.4	9.0	9.7	9.9
8H	8.2	9.0	8.5	9.2	9.5	8.6	9.4	8.9	9.6	9.9
12H	8.2	8.9	8.5	9.2	9.4	8.6	9.3	8.9	9.6	9.8
4H 2H	8.4	9.2	8.6	9.4	9.6	8.8	9.6	9.0	9.8	10.0
3H	8.2	8.9	8.5	9.2	9.4	8.6	9.3	8.9	9.6	9.8
4H	8.1	8.7	8.4	9.0	9.3	8.5	9.1	8.8	9.4	9.7
6H	8.0	8.6	8.4	8.9	9.2	8.4	9.0	8.8	9.3	9.6
8H	7.9	8.5	8.3	8.8	9.2	8.3	8.9	8.7	9.2	9.6
12H	7.9	8.4	8.3	8.7	9.1	8.3	8.8	8.7	9.1	9.5
8H 4H	7.9	8.5	8.3	8.8	9.2	8.3	8.9	8.7	9.2	9.6
6H	7.8	8.3	8.3	8.7	9.1	8.2	8.7	8.7	9.1	9.5
8H	7.8	8.2	8.2	8.6	9.0	8.2	8.6	8.6	9.0	9.4
12H	7.7	8.0	8.2	8.5	9.0	8.1	8.5	8.6	8.9	9.4
12H 4H	7.9	8.4	8.3	8.7	9.1	8.3	8.8	8.7	9.1	9.5
6H	7.8	8.2	8.2	8.6	9.0	8.2	8.6	8.6	9.0	9.4
8H	7.7	8.0	8.2	8.5	9.0	8.1	8.5	8.6	8.9	9.4
Variations with the observer position at spacings:										
S = 1.0H	+ 3.1 / -20.2					+ 3.2 / -16.4				
1.5H	+ 5.0 / -12.9					+ 5.0 / -12.0				
2.0H	+ 6.9 / -33.1					+ 7.1 / -32.2				

CIE Pub.117 Corrected 931.9 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	94	87	83	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

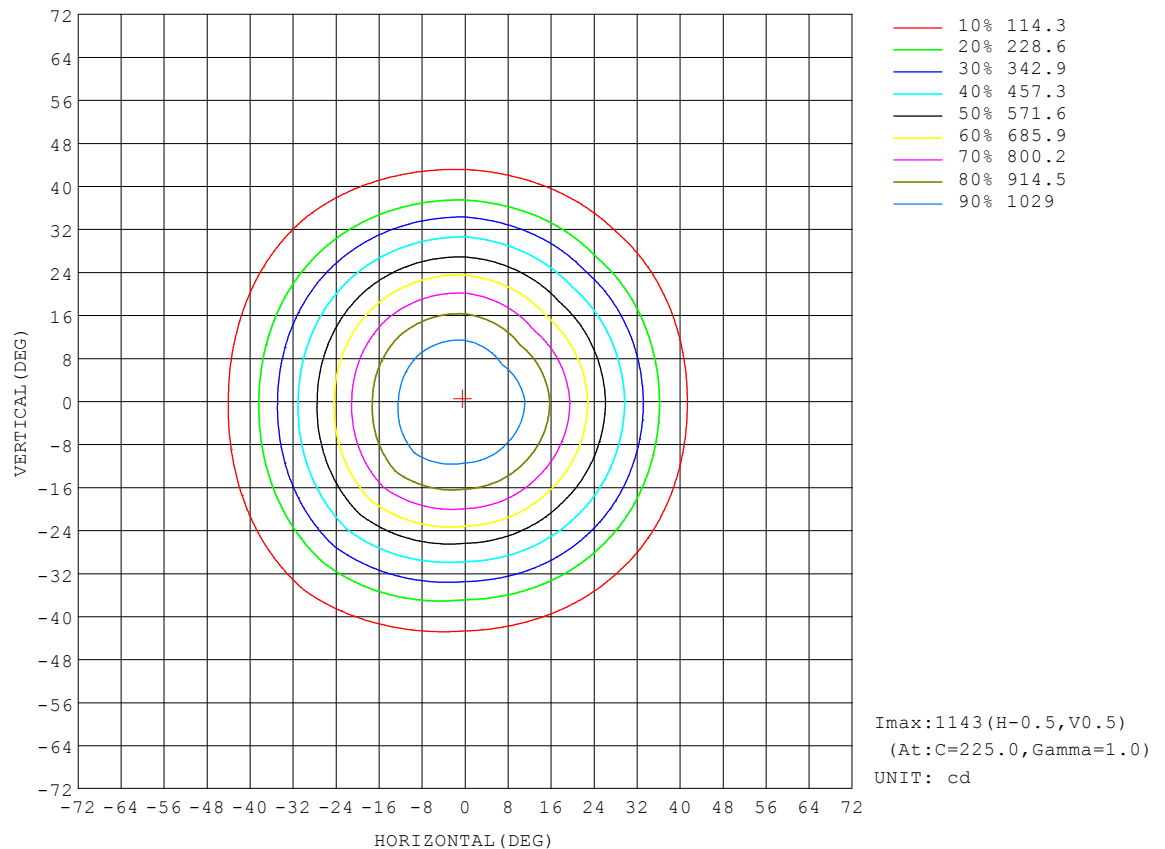


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

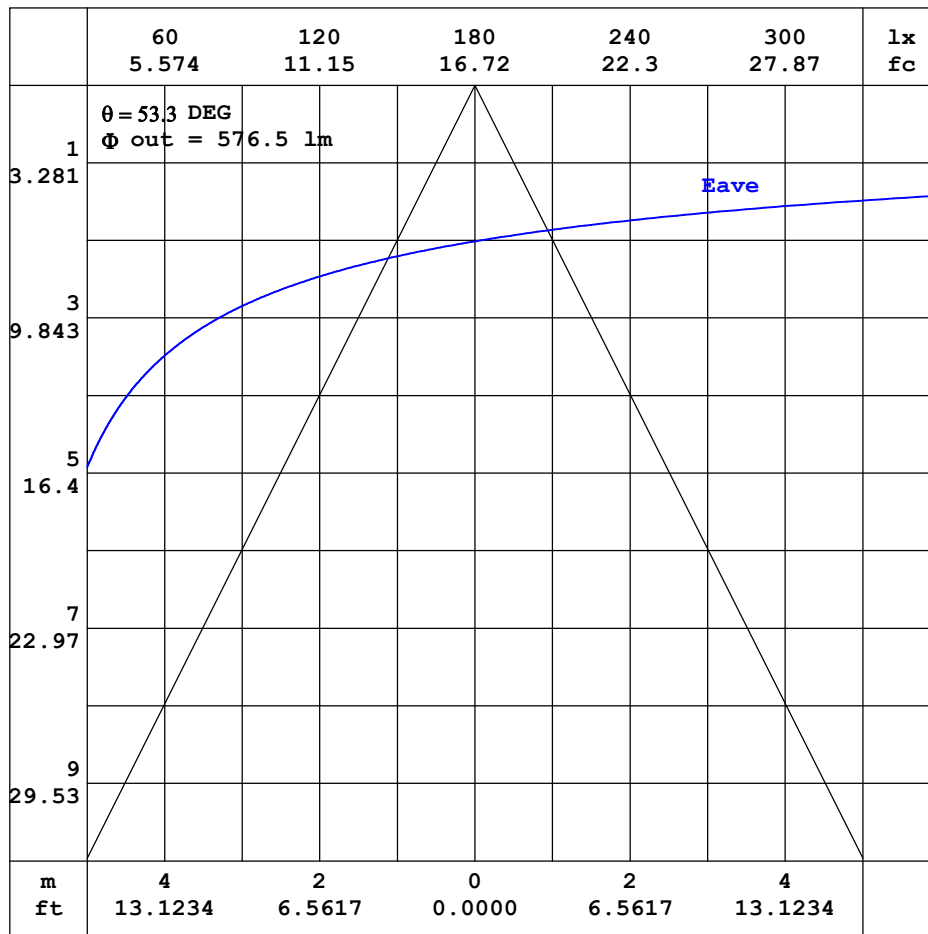


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

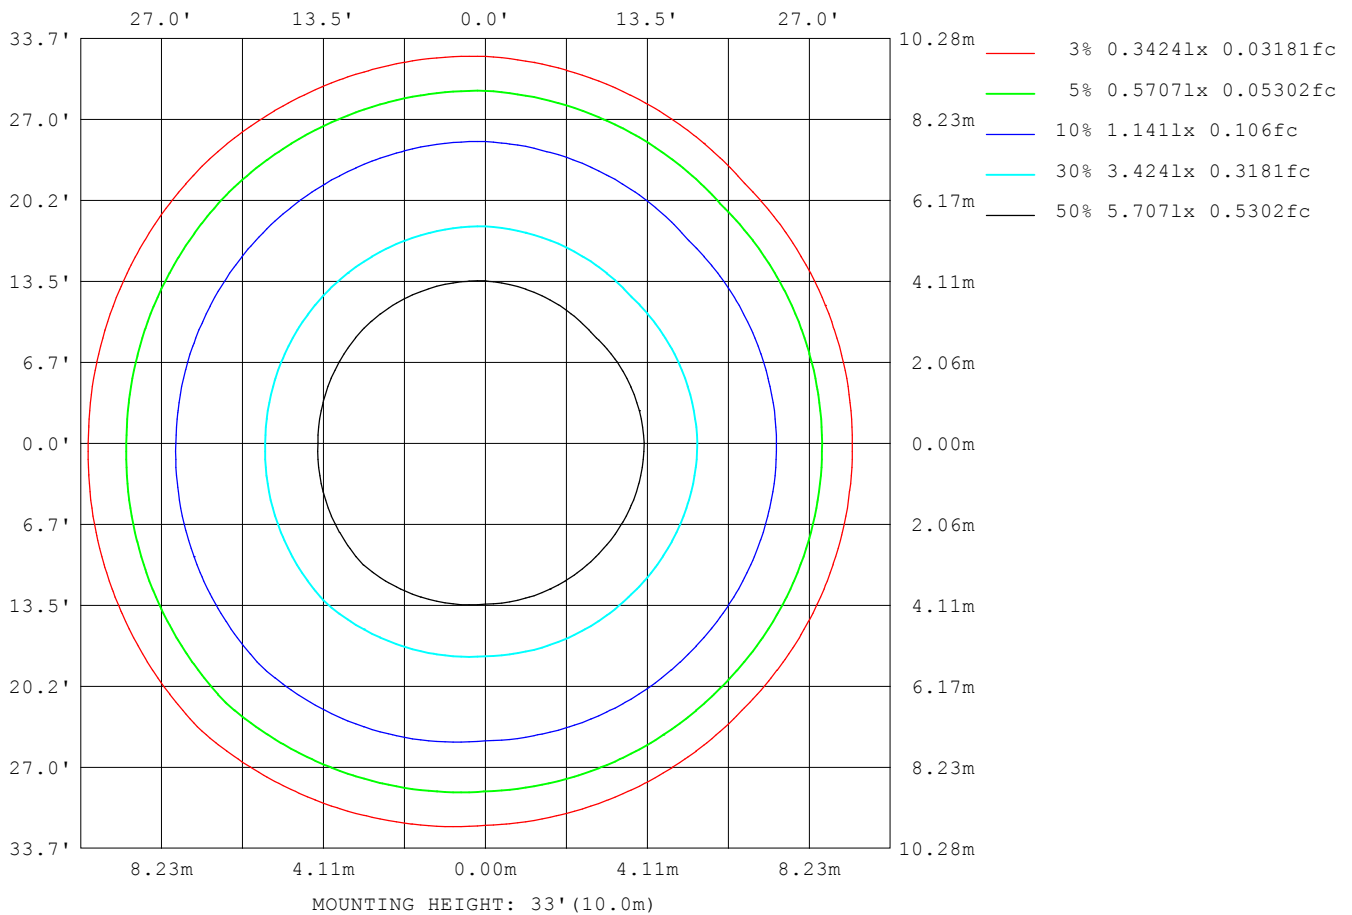

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4
L_0~180 (75) av	1
L_0~180 (85) av	1
L_90~270 (65) av	2
L_90~270 (75) av	1
L_90~270 (85) av	1
L_45 (65) av	5
L_45 (75) av	2
L_45 (85) av	1

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

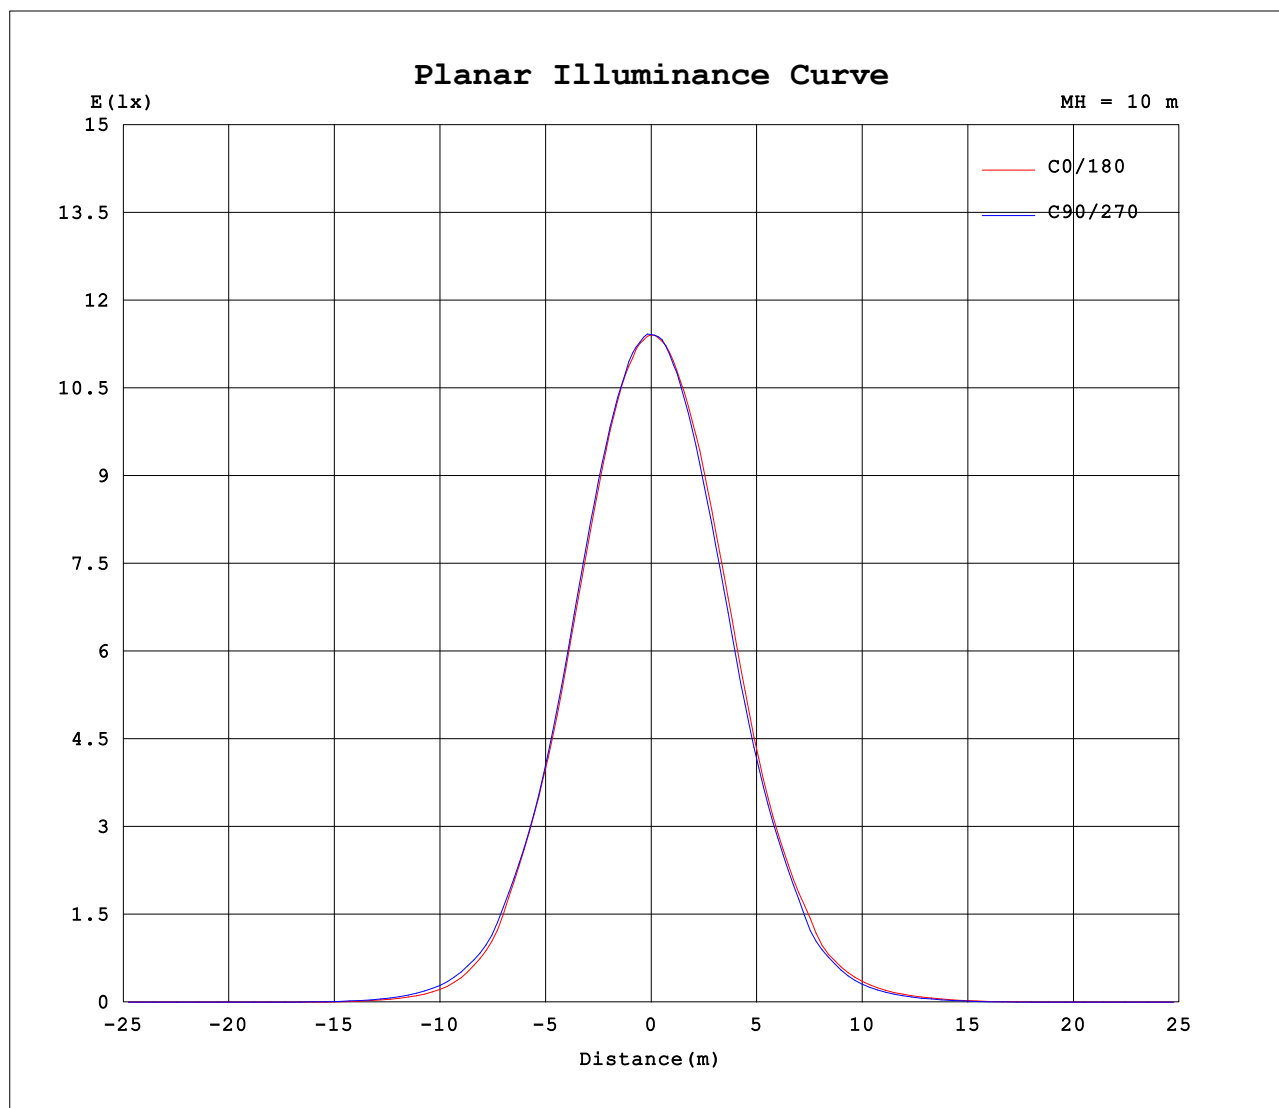

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.4V I:0.0780A P:9.480W PF:0.9910 Freq:60.00Hz Lamp Flux:931.906x1 lm		
NAME: WL-2CLD3IN9WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.024*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1140	1143	1142	1137	1140	1143	1142	1137										
5	1114	1118	1123	1130	1124	1127	1121	1103										
10	1049	1048	1056	1085	1067	1068	1054	1023										
15	937	936	949	994	973	970	947	905										
20	784	780	799	862	834	833	804	746										
25	609	603	621	694	662	658	633	581										
30	448	439	452	519	490	483	474	420										
35	274	276	296	363	340	331	320	248										
40	140	146	161	204	184	179	172	137										
45	63.1	65.8	80.9	112	101	100	87.5	64.6										
50	26.3	26.9	36.6	55.9	52.7	50.1	42.3	26.8										
55	6.97	7.19	12.0	25.3	22.7	19.6	16.6	6.59										
60	0.96	1.00	1.75	6.32	4.59	3.42	3.12	0.90										
65	0.05	0.05	0.07	0.34	0.18	0.23	0.06	0.05										
70	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.03										
75	0.02	0.02	0.03	0.04	0.04	0.04	0.03	0.03										
80	0.01	0.02	0.02	0.03	0.02	0.02	0.02	0.01										
85	0.01	0.00	0.01	0.02	0.01	0.01	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01										
110	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.02	0.01	0.01	0.01	0.00	0.00	0.01	0.01										
120	0.05	0.05	0.04	0.03	0.02	0.02	0.03	0.05										
125	0.09	0.08	0.08	0.06	0.05	0.05	0.06	0.08										
130	0.16	0.16	0.15	0.12	0.10	0.09	0.12	0.14										
135	0.23	0.24	0.23	0.20	0.17	0.17	0.19	0.22										
140	0.33	0.34	0.33	0.29	0.26	0.25	0.27	0.31										
145	0.45	0.46	0.44	0.40	0.35	0.35	0.38	0.42										
150	0.56	0.57	0.55	0.52	0.46	0.47	0.49	0.54										
155	0.68	0.68	0.67	0.63	0.57	0.58	0.61	0.66										
160	0.79	0.79	0.77	0.74	0.69	0.69	0.73	0.77										
165	0.88	0.89	0.88	0.85	0.80	0.81	0.84	0.88										
170	0.96	0.96	0.95	0.94	0.92	0.91	0.93	0.96										
175	1.01	1.01	1.01	1.01	0.99	0.98	1.00	1.02										
180	1.02	1.02	1.04	1.04	1.02	1.02	1.03	1.04										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: