


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.59 lm/W			
MODEL		Imax(cd)	3538	S/MH(C0/180)	0.87
NOMINAL POWER(W)	30W	LOR(%)	100.0	S/MH(C90/270)	0.83
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2941.8	η UP,DN(C0-180)	0.1,51.0
NOMINAL FLUX(lm)	2941.75	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,48.9
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

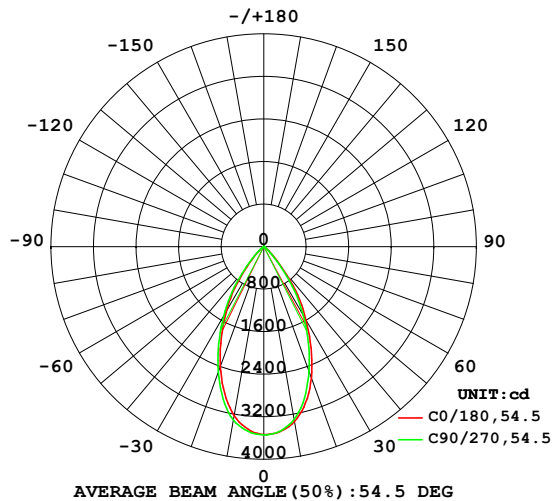

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

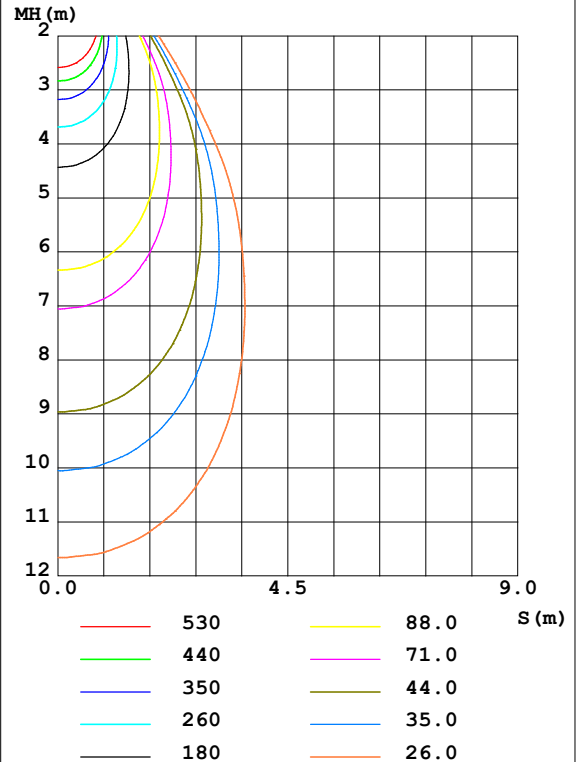

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3337	3311	3295	3317	3222	3261	3309	3295	0- 10	326.2	326.2	11.1,11.1
20	2621	2533	2489	2534	2394	2433	2504	2483	10- 20	819.6	1146	38.9,38.9
30	1586	1526	1485	1551	1418	1454	1514	1486	20- 30	911.1	2057	69.9,69.9
40	607.6	542.9	520.0	600.7	504.8	523.3	570.4	519.3	30- 40	631.0	2688	91.4,91.4
50	114.2	107.8	100.7	114.3	97.55	105.9	103.7	85.58	40- 50	208.7	2897	98.5,98.5
60	12.30	12.52	10.72	11.75	8.778	11.51	10.11	6.800	50- 60	39.46	2936	99.8,99.8
70	0.0945	0.0798	0.0848	0.0847	0.0896	0.0920	0.0799	0.0799	60- 70	1.741	2938	99.9,99.9
80	0.0461	0.0412	0.0485	0.0557	0.0484	0.0436	0.0460	0.0412	70- 80	0.0685	2938	99.9,99.9
90	0.0169	0.0121	0.0121	0.0097	0.0097	0.0025	0.0049	0.0000	80- 90	0.0315	2938	99.9,99.9
100	0.0168	0.0073	0.0097	0.0096	0.0120	0.0048	0.0096	0.0049	90-100	0.0094	2938	99.9,99.9
110	0.0411	0.0315	0.0314	0.0219	0.0194	0.0193	0.0194	0.0169	100-110	0.0156	2938	99.9,99.9
120	0.1596	0.1625	0.1668	0.1576	0.1164	0.1041	0.1068	0.1162	110-120	0.0670	2938	99.9,99.9
130	0.5395	0.5454	0.5686	0.5527	0.4050	0.3944	0.3977	0.4258	120-130	0.2538	2938	99.9,99.9
140	1.140	1.156	1.198	1.187	0.9211	0.8979	0.8992	0.9415	130-140	0.5704	2939	99.9,99.9
150	1.881	1.919	1.912	1.936	1.570	1.549	1.568	1.620	140-150	0.8631	2940	99.9,99.9
160	2.608	2.638	2.637	2.677	2.306	2.269	2.299	2.373	150-160	0.9663	2941	100,100
170	3.187	3.166	3.174	3.221	3.016	2.969	2.987	3.066	160-170	0.7866	2941	100,100
180	3.395	3.330	3.332	3.405	3.383	3.330	3.342	3.403	170-180	0.3080	2942	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

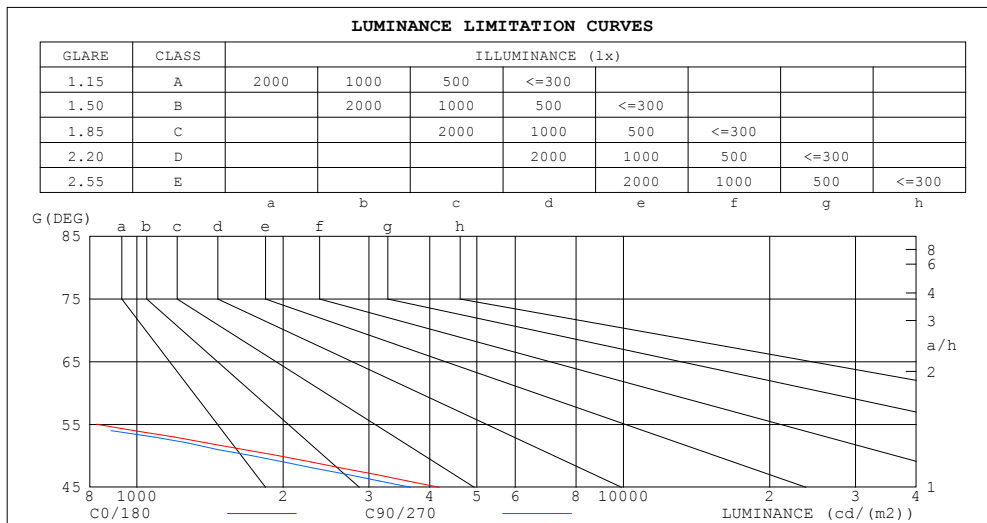


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.83	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.75	.72	.78	.74	.72	.70
6.0	.79	.73	.69	.78	.72	.68	.76	.72	.68	.75	.71	.67	.74	.70	.67	.65
7.0	.74	.68	.64	.73	.68	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.62	.59	.66	.62	.59	.57
9.0	.66	.60	.56	.65	.60	.56	.64	.59	.56	.64	.59	.55	.63	.58	.55	.54
10.0	.62	.57	.53	.62	.56	.53	.61	.56	.52	.60	.56	.52	.60	.55	.52	.51

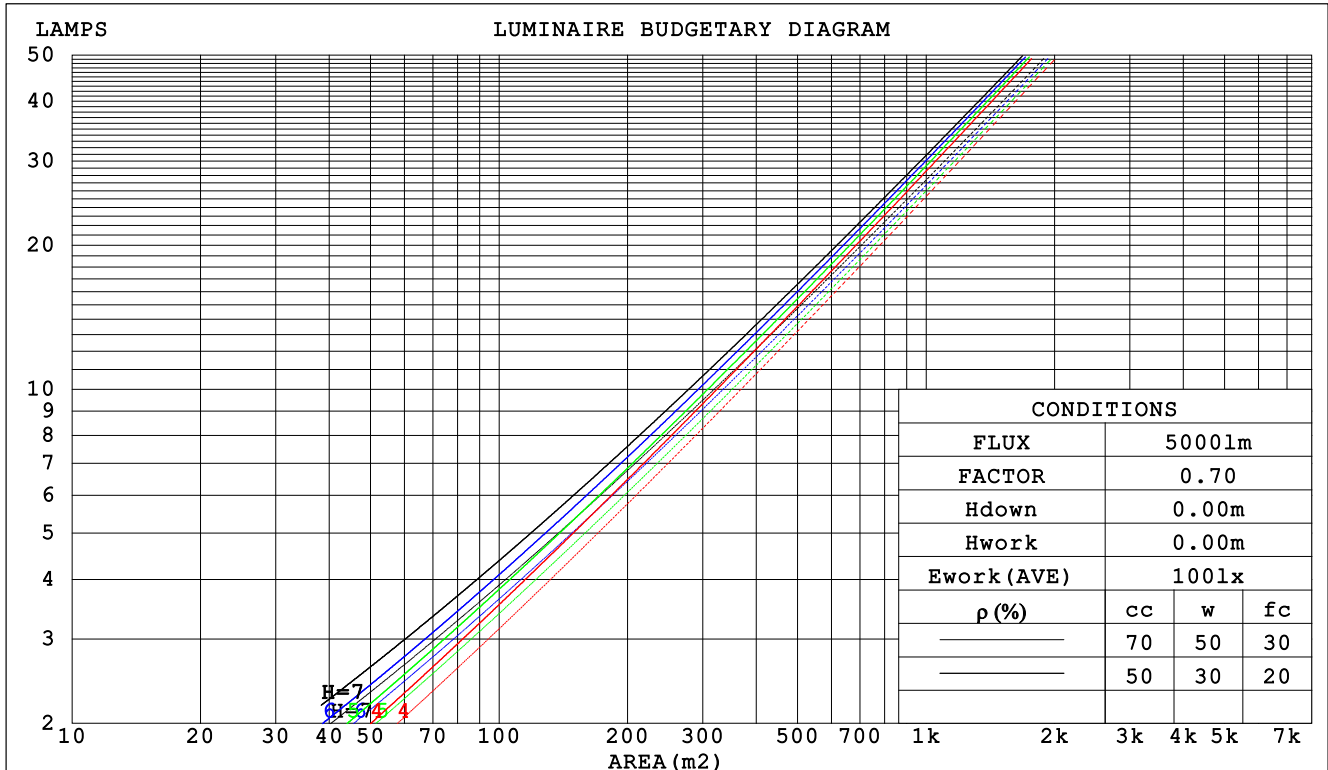

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.158	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.165	.091	.028	.154	.086	.027	.144	.081	.025	.135	.076	.024		
3.0	.163	.087	.026	.158	.085	.025	.149	.081	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.076	.022	.145	.074	.022	.138	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.142	.071	.020	.138	.070	.020	.132	.068	.020	.127	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.133	.066	.019	.127	.064	.019	.122	.063	.018	.117	.061	.018		
8.0	.130	.063	.018	.127	.063	.018	.122	.061	.017	.118	.060	.017	.114	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.118	.058	.017	.114	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.057	.016	.113	.056	.016	.110	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.134	.114	.135	.115	.098	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.049	.025	.058	.034	.018	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm										
NAME: WL-2CLD3IN30WB5D3HVWH					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.: 4IN			SERIAL No.:		
MFR.: WS					SUR.:0.029/*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.4	14.4	13.7	14.6	14.7	13.0	14.0	13.2	14.1	14.3
3H	13.3	14.1	13.5	14.3	14.5	12.8	13.7	13.1	13.9	14.1
4H	13.2	14.0	13.5	14.2	14.4	12.7	13.6	13.0	13.8	14.0
6H	13.1	13.9	13.4	14.1	14.4	12.7	13.4	13.0	13.7	13.9
8H	13.0	13.8	13.3	14.0	14.3	12.6	13.4	12.9	13.6	13.9
12H	13.0	13.7	13.3	14.0	14.3	12.6	13.3	12.9	13.5	13.8
4H 2H	13.2	14.0	13.5	14.2	14.5	12.8	13.6	13.0	13.8	14.0
3H	13.0	13.7	13.3	14.0	14.3	12.6	13.3	12.9	13.6	13.8
4H	12.9	13.5	13.3	13.8	14.2	12.5	13.1	12.8	13.4	13.7
6H	12.8	13.4	13.2	13.7	14.1	12.4	13.0	12.8	13.3	13.6
8H	12.8	13.3	13.2	13.6	14.0	12.3	12.9	12.7	13.2	13.6
12H	12.7	13.2	13.1	13.6	14.0	12.3	12.8	12.7	13.1	13.5
8H 4H	12.8	13.3	13.2	13.6	14.0	12.3	12.9	12.7	13.2	13.6
6H	12.7	13.1	13.1	13.5	13.9	12.2	12.7	12.7	13.1	13.5
8H	12.6	13.0	13.1	13.4	13.8	12.2	12.6	12.6	13.0	13.4
12H	12.5	12.9	13.0	13.3	13.8	12.1	12.4	12.6	12.9	13.4
12H 4H	12.7	13.2	13.1	13.6	14.0	12.3	12.8	12.7	13.1	13.5
6H	12.6	13.0	13.1	13.4	13.8	12.2	12.6	12.6	13.0	13.4
8H	12.5	12.9	13.0	13.3	13.8	12.1	12.4	12.6	12.9	13.4
Variations with the observer position at spacings:										
S = 1.0H	+ 3.5 / -13.8					+ 3.2 / -13.7				
1.5H	+ 5.5 / -10.0					+ 5.1 / - 9.6				
2.0H	+ 6.8 / -31.5					+ 6.4 / -34.0				

CIE Pub.117 Corrected 2942 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	76	85	79	75	85	79	75	72
0.80	94	88	84	93	87	84	92	87	83	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	97	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

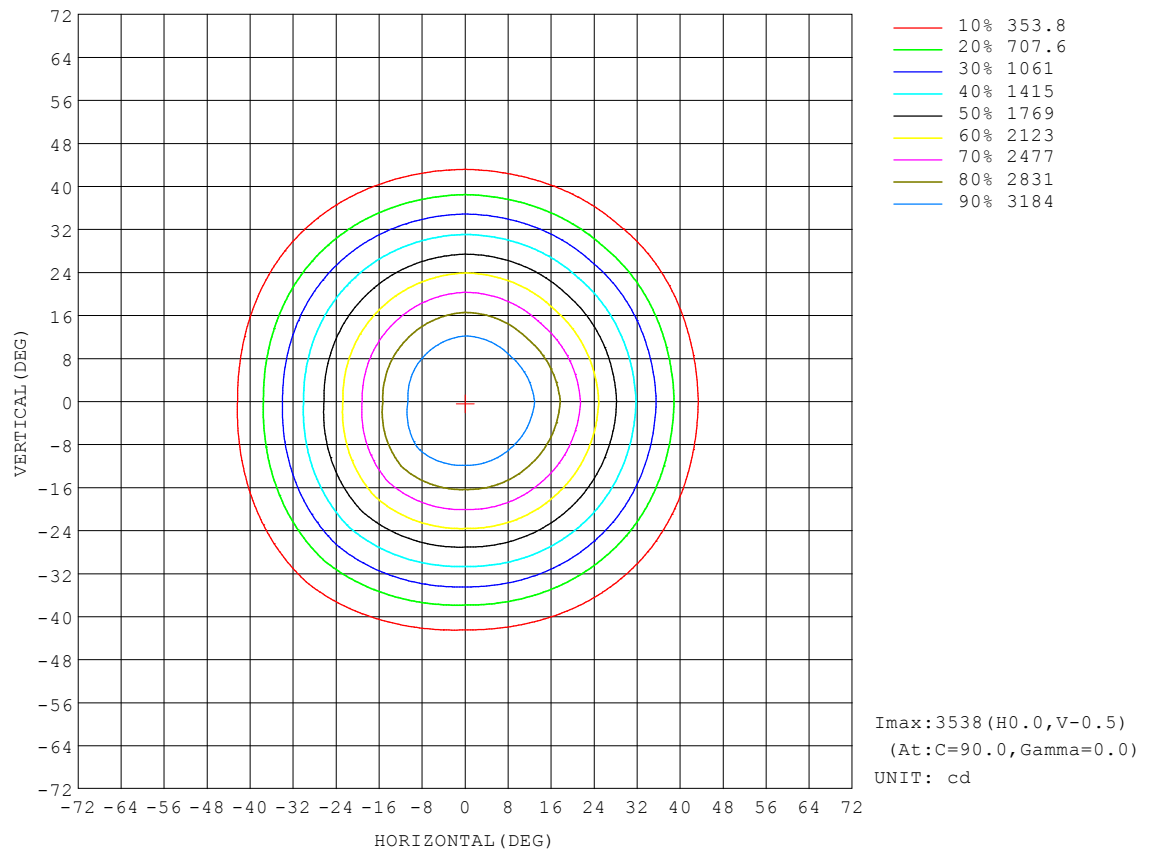


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

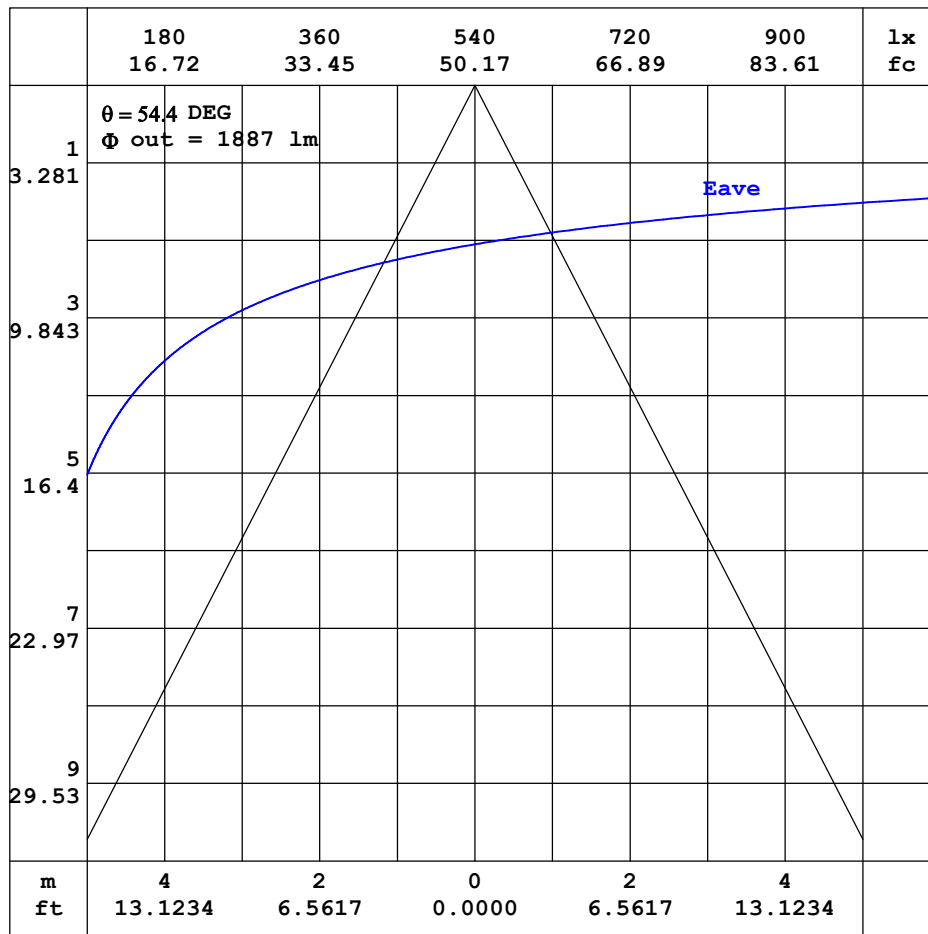


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

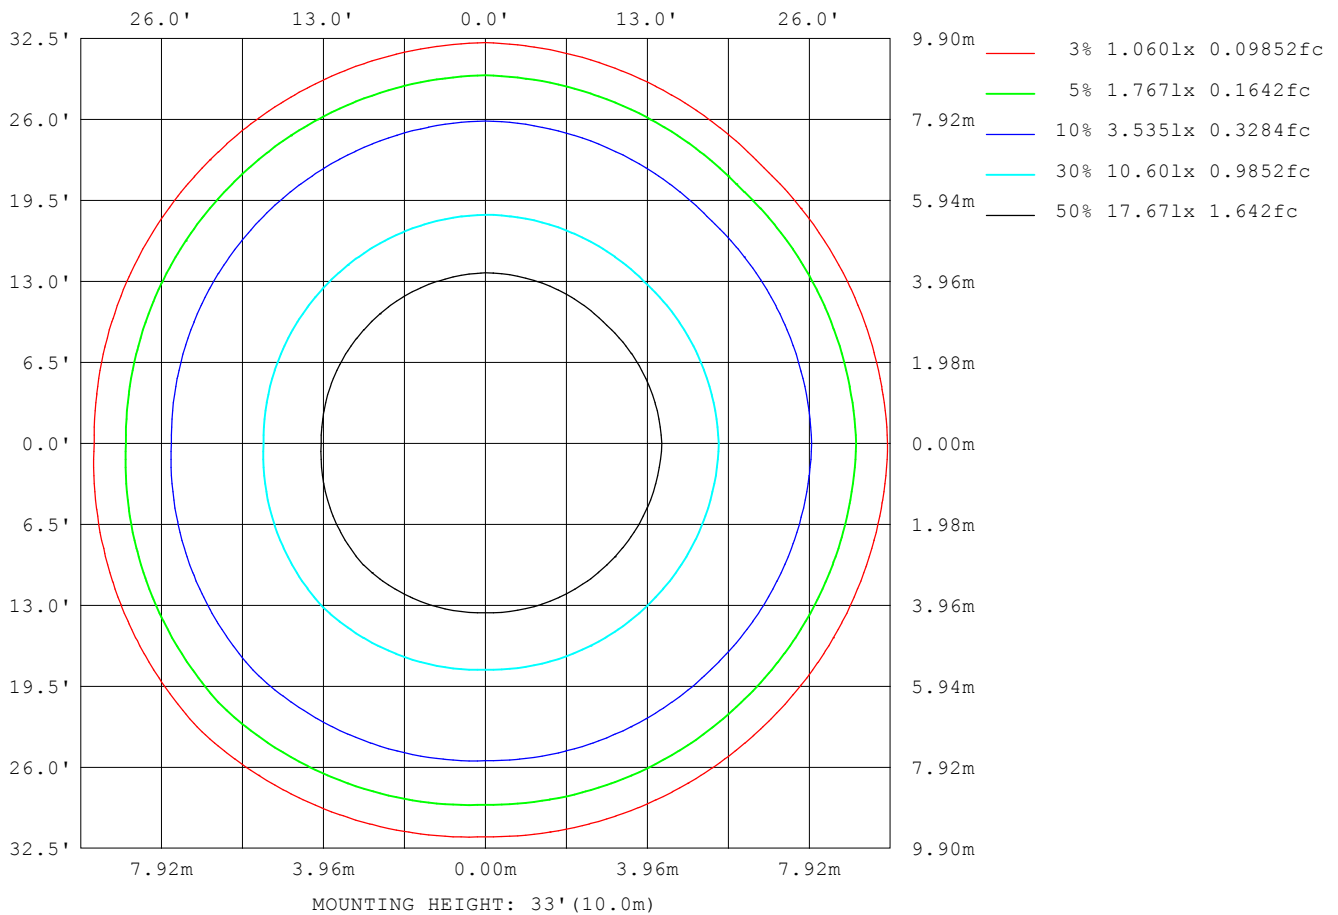

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3
L_0~180 (75) av	3
L_0~180 (85) av	4
L_90~270 (65) av	3
L_90~270 (75) av	3
L_90~270 (85) av	4
L_45 (65) av	3
L_45 (75) av	3
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

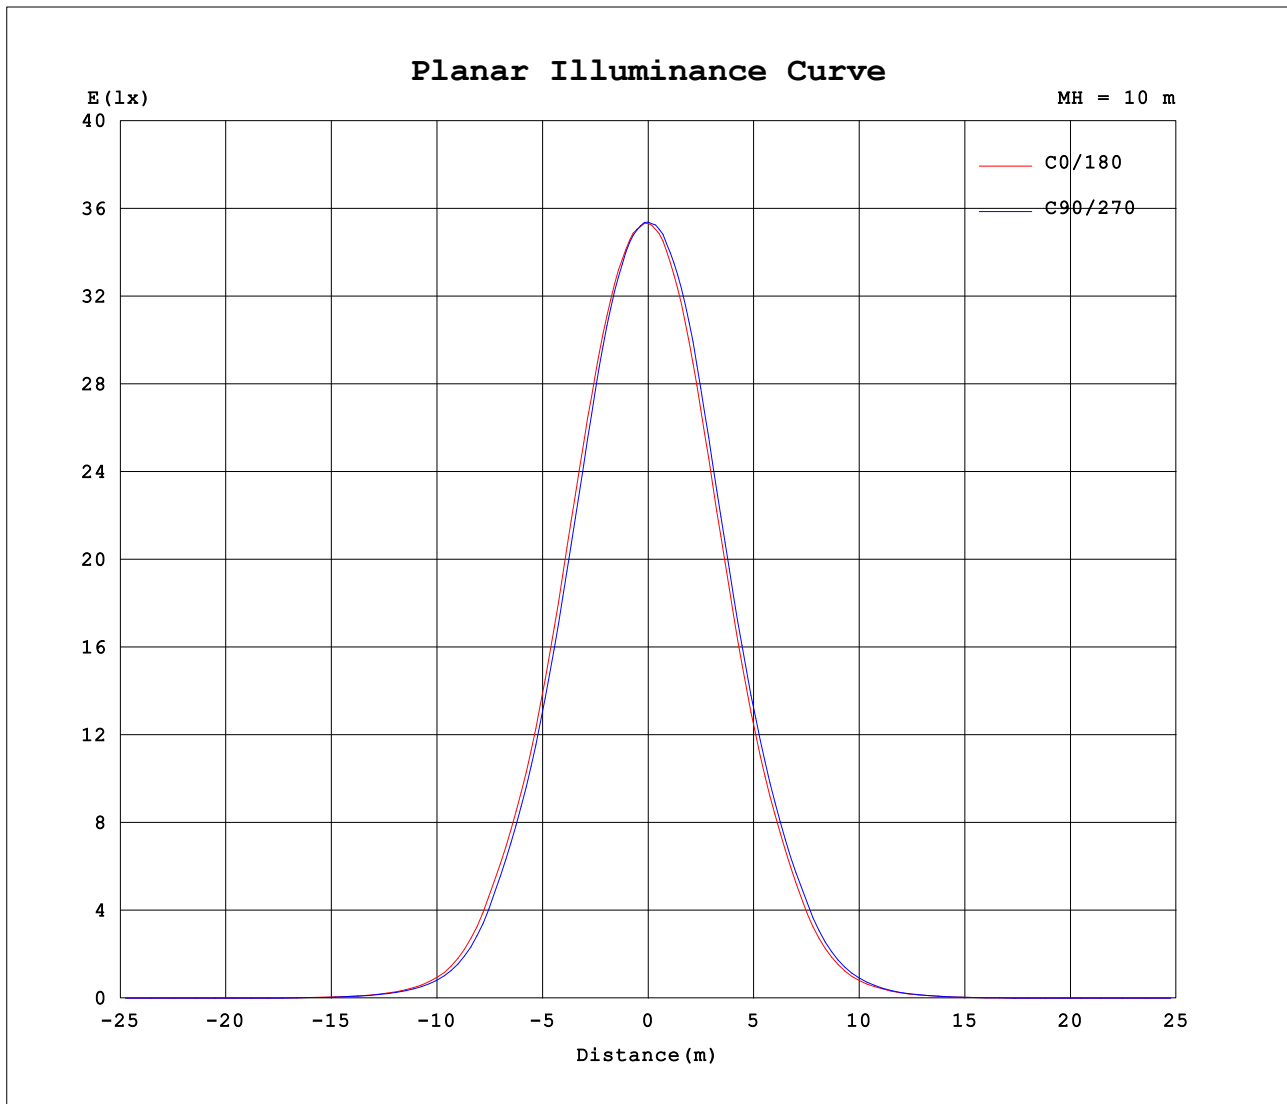

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.3V I:0.2290A P:27.60W PF:0.9930 Freq:60.00Hz Lamp Flux:2941.75x1 lm		
NAME: WL-2CLD3IN30WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	3533	3529	3538	3532	3533	3529	3538	3532										
5	3496	3487	3486	3495	3446	3459	3481	3477										
10	3337	3311	3295	3317	3222	3261	3309	3295										
15	3044	2984	2953	2989	2856	2900	2962	2949										
20	2621	2533	2489	2534	2394	2433	2504	2483										
25	2108	2027	1987	2042	1896	1940	2007	1986										
30	1586	1526	1485	1551	1418	1454	1514	1486										
35	1115	1044	1014	1083	960	998	1045	1009										
40	608	543	520	601	505	523	570	519										
45	269	249	235	280	230	244	262	224										
50	114	108	101	114	97.5	106	104	85.6										
55	43.2	41.9	39.3	40.4	37.8	39.5	35.8	28.7										
60	12.3	12.5	10.7	11.8	8.78	11.5	10.1	6.80										
65	0.14	0.10	0.12	0.16	0.11	0.12	0.11	0.10										
70	0.09	0.08	0.08	0.08	0.09	0.09	0.08	0.08										
75	0.07	0.07	0.07	0.06	0.06	0.07	0.06	0.06										
80	0.05	0.04	0.05	0.06	0.05	0.04	0.05	0.04										
85	0.04	0.04	0.04	0.03	0.03	0.02	0.03	0.03										
90	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00										
95	0.02	0.01	0.01	0.02	0.01	0.01	0.00	0.01										
100	0.02	0.01	0.01	0.01	0.01	0.00	0.01	0.00										
105	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01										
110	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.02										
115	0.07	0.07	0.08	0.07	0.06	0.05	0.04	0.05										
120	0.16	0.16	0.17	0.16	0.12	0.10	0.11	0.12										
125	0.31	0.32	0.33	0.32	0.23	0.22	0.22	0.24										
130	0.54	0.55	0.57	0.55	0.41	0.39	0.40	0.43										
135	0.82	0.83	0.86	0.84	0.65	0.62	0.62	0.66										
140	1.14	1.16	1.20	1.19	0.92	0.90	0.90	0.94										
145	1.51	1.54	1.57	1.56	1.24	1.20	1.22	1.26										
150	1.88	1.92	1.91	1.94	1.57	1.55	1.57	1.62										
155	2.25	2.29	2.28	2.32	1.92	1.89	1.93	1.98										
160	2.61	2.64	2.64	2.68	2.31	2.27	2.30	2.37										
165	2.93	2.94	2.94	2.97	2.70	2.66	2.68	2.75										
170	3.19	3.17	3.17	3.22	3.02	2.97	2.99	3.07										
175	3.35	3.31	3.32	3.37	3.26	3.21	3.22	3.30										
180	3.40	3.33	3.33	3.41	3.38	3.33	3.34	3.40										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: