


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 94.65 lm/W
MODEL		I _{max} (cd)	4404	S/MH(C0/180)	0.87	
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	0.83	
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	3653.5	η UP,DN(C0-180)	0.1,51.0	
NOMINAL FLUX(lm)	3653.48	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,48.9	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.90	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

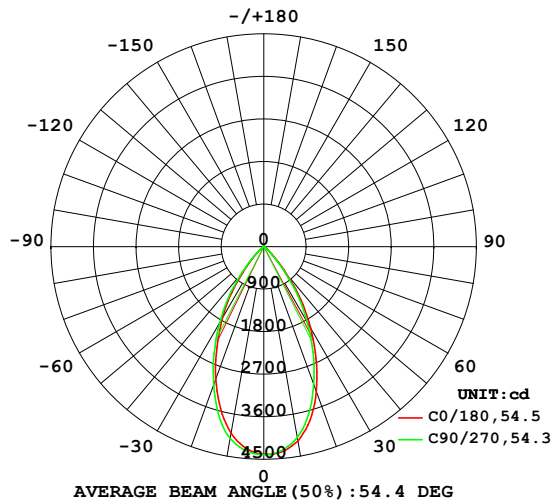

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

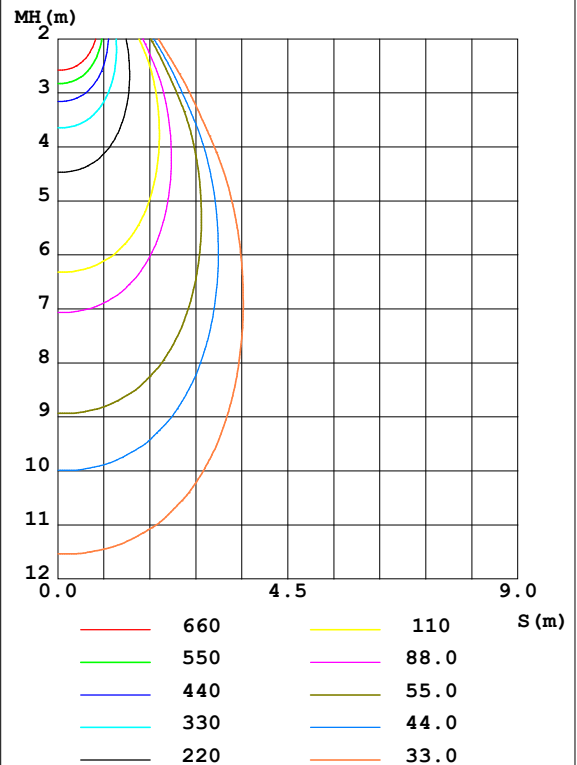

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4175	4128	4097	4119	4007	4061	4117	4098	0- 10	405.9	405.9	11.1,11.1
20	3252	3156	3099	3152	2973	3022	3106	3084	10- 20	1019	1425	39,39
30	1980	1907	1834	1920	1764	1810	1879	1835	20- 30	1132	2557	70,70
40	747.0	680.7	659.5	739.2	627.1	664.9	705.4	650.5	30- 40	782.2	3339	91.4,91.4
50	138.3	137.7	124.3	147.3	120.4	130.2	128.1	105.9	40- 50	258.9	3598	98.5,98.5
60	15.26	15.46	13.08	14.71	10.82	14.02	12.50	8.442	50- 60	48.56	3646	99.8,99.8
70	0.1235	0.1041	0.1139	0.1162	0.1113	0.1067	0.1113	0.1138	60- 70	2.155	3649	99.9,99.9
80	0.0631	0.0604	0.0703	0.0774	0.0701	0.0702	0.0605	0.0581	70- 80	0.0919	3649	99.9,99.9
90	0.0243	0.0169	0.0193	0.0170	0.0170	0.0194	0.0122	0.0218	80- 90	0.0442	3649	99.9,99.9
100	0.0169	0.0121	0.0170	0.0194	0.0169	0.0097	0.0025	0.0096	90-100	0.0162	3649	99.9,99.9
110	0.0532	0.0364	0.0411	0.0340	0.0243	0.0362	0.0243	0.0314	100-110	0.0217	3649	99.9,99.9
120	0.1935	0.2037	0.2104	0.1939	0.1480	0.1379	0.1383	0.1548	110-120	0.0858	3649	99.9,99.9
130	0.6725	0.6861	0.7113	0.6885	0.5092	0.4887	0.4850	0.5274	120-130	0.3187	3649	99.9,99.9
140	1.421	1.442	1.484	1.459	1.146	1.118	1.115	1.167	130-140	0.7079	3650	99.9,99.9
150	2.329	2.379	2.368	2.415	1.946	1.920	1.934	2.002	140-150	1.070	3651	99.9,99.9
160	3.232	3.265	3.273	3.319	2.861	2.811	2.842	2.942	150-160	1.197	3652	100,100
170	3.945	3.928	3.930	3.994	3.740	3.668	3.689	3.790	160-170	0.9739	3653	100,100
180	4.190	4.115	4.134	4.214	4.187	4.119	4.127	4.219	170-180	0.3813	3653	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

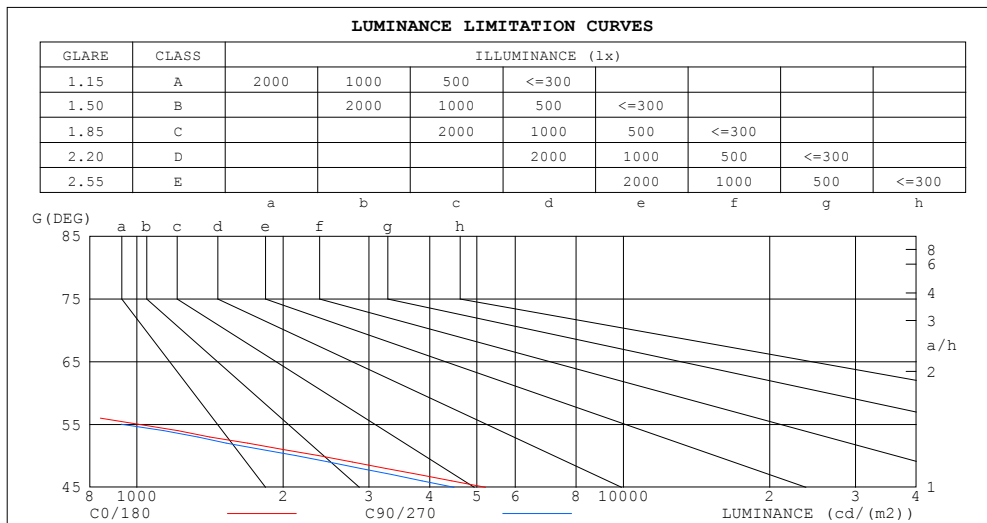


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.75	.72	.78	.74	.72	.70
6.0	.79	.73	.69	.78	.72	.68	.77	.72	.68	.75	.71	.67	.74	.70	.67	.65
7.0	.74	.68	.64	.73	.68	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.59	.67	.62	.59	.66	.62	.59	.57
9.0	.66	.60	.56	.65	.60	.56	.64	.59	.56	.64	.59	.56	.63	.58	.55	.54
10.0	.62	.57	.53	.62	.56	.53	.61	.56	.52	.60	.56	.52	.60	.55	.52	.51

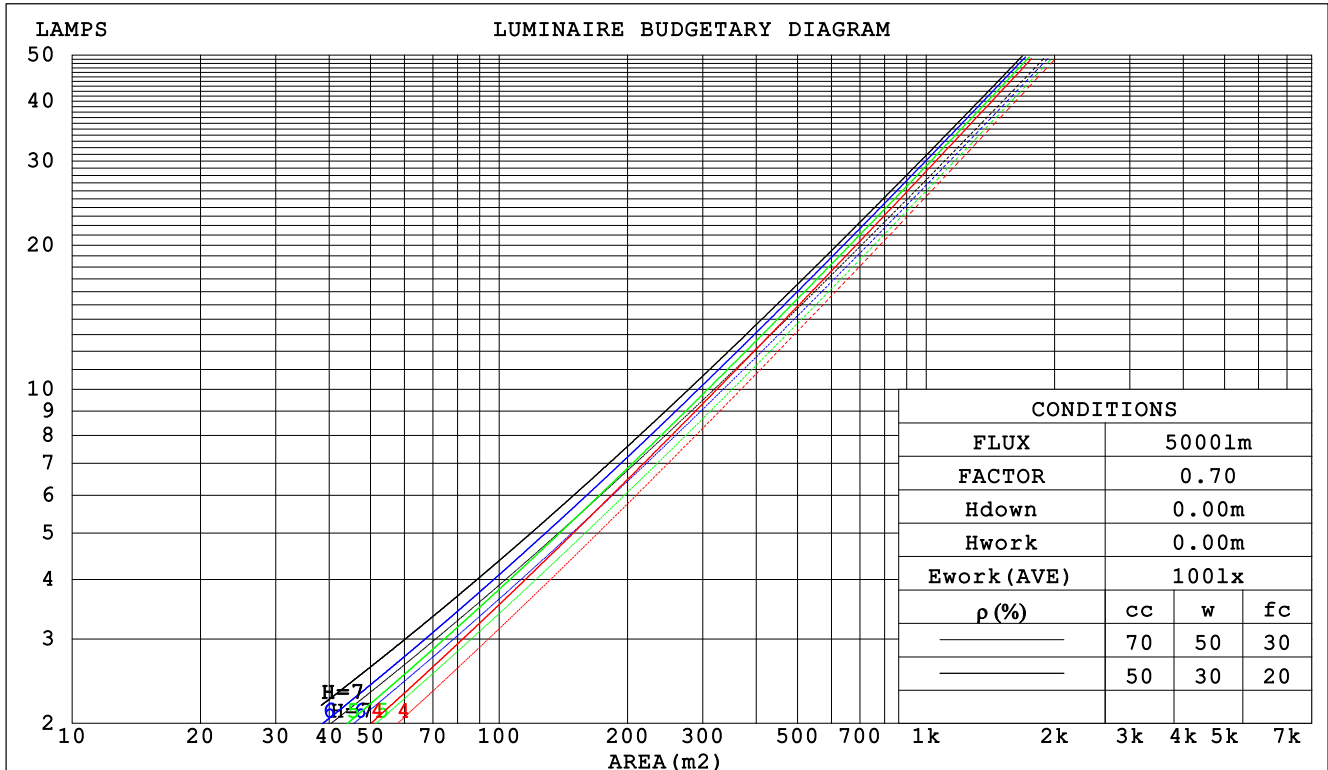

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm					
NAME: WL-2CLD3IN40WB5D3HVWH			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 4IN		SERIAL No.:
MFR.: WS			SUR.:0.029/*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.158	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.091	.028	.154	.086	.027	.144	.081	.025	.135	.076	.024		
3.0	.163	.087	.026	.158	.084	.025	.149	.081	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.145	.074	.022	.138	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.142	.071	.020	.138	.070	.020	.132	.068	.020	.127	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.133	.066	.019	.127	.064	.019	.122	.063	.018	.117	.061	.018		
8.0	.130	.063	.018	.127	.063	.018	.122	.061	.017	.118	.060	.017	.114	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.118	.058	.016	.114	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.057	.016	.113	.056	.016	.110	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.134	.114	.134	.115	.098	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.049	.025	.058	.034	.018	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm										
NAME: WL-2CLD3IN40WB5D3HVWH					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 4IN			SERIAL No.:		
MFR.: WS					SUR.:0.029/*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.2	15.2	14.4	15.3	15.5	13.8	14.7	14.0	14.9	15.1
3H	14.0	14.9	14.3	15.1	15.3	13.6	14.5	13.9	14.7	14.9
4H	13.9	14.8	14.2	15.0	15.2	13.5	14.3	13.8	14.6	14.8
6H	13.8	14.6	14.1	14.9	15.1	13.4	14.2	13.7	14.4	14.7
8H	13.8	14.5	14.1	14.8	15.1	13.4	14.1	13.7	14.4	14.6
12H	13.8	14.5	14.1	14.7	15.0	13.3	14.0	13.7	14.3	14.6
4H 2H	13.9	14.8	14.2	15.0	15.2	13.5	14.3	13.8	14.6	14.8
3H	13.8	14.5	14.1	14.7	15.0	13.3	14.1	13.7	14.3	14.6
4H	13.7	14.3	14.0	14.6	14.9	13.2	13.9	13.6	14.2	14.5
6H	13.6	14.1	13.9	14.5	14.8	13.1	13.7	13.5	14.0	14.4
8H	13.5	14.0	13.9	14.4	14.8	13.1	13.6	13.5	14.0	14.3
12H	13.5	13.9	13.9	14.3	14.7	13.0	13.5	13.5	13.9	14.3
8H 4H	13.5	14.0	13.9	14.4	14.8	13.1	13.6	13.5	14.0	14.3
6H	13.4	13.8	13.8	14.2	14.7	13.0	13.4	13.4	13.8	14.2
8H	13.4	13.7	13.8	14.2	14.6	12.9	13.3	13.4	13.7	14.2
12H	13.3	13.6	13.8	14.1	14.5	12.9	13.2	13.4	13.7	14.1
12H 4H	13.5	13.9	13.9	14.3	14.7	13.0	13.5	13.5	13.9	14.3
6H	13.4	13.7	13.8	14.2	14.6	12.9	13.3	13.4	13.7	14.2
8H	13.3	13.6	13.8	14.1	14.5	12.9	13.2	13.4	13.7	14.1
Variations with the observer position at spacings:										
S = 1.0H	+ 3.4 / -13.9					+ 3.2 / -13.8				
1.5H	+ 5.4 / -10.0					+ 5.2 / - 9.6				
2.0H	+ 6.8 / -31.4					+ 6.4 / -33.8				

CIE Pub.117 Corrected 3653 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	76	86	79	75	85	79	75	72
0.80	94	88	84	93	87	84	92	87	83	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	97	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	106	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

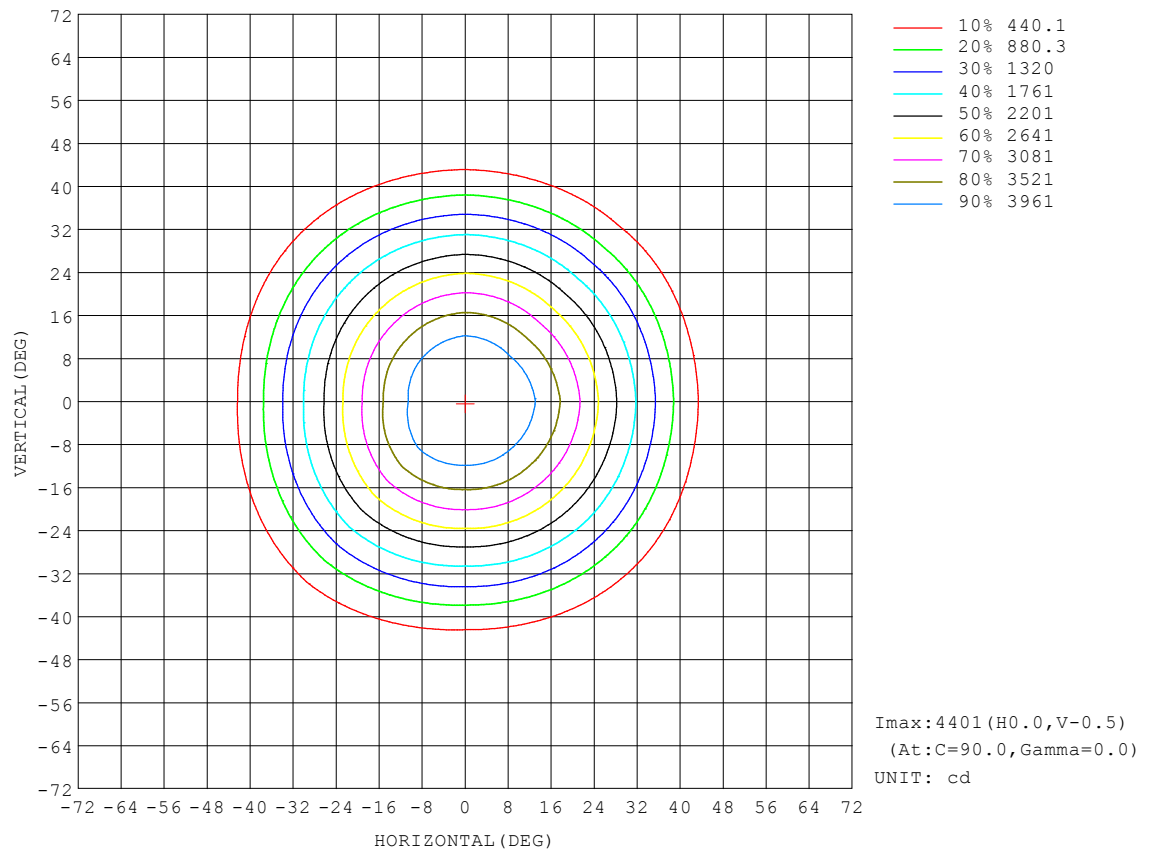


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

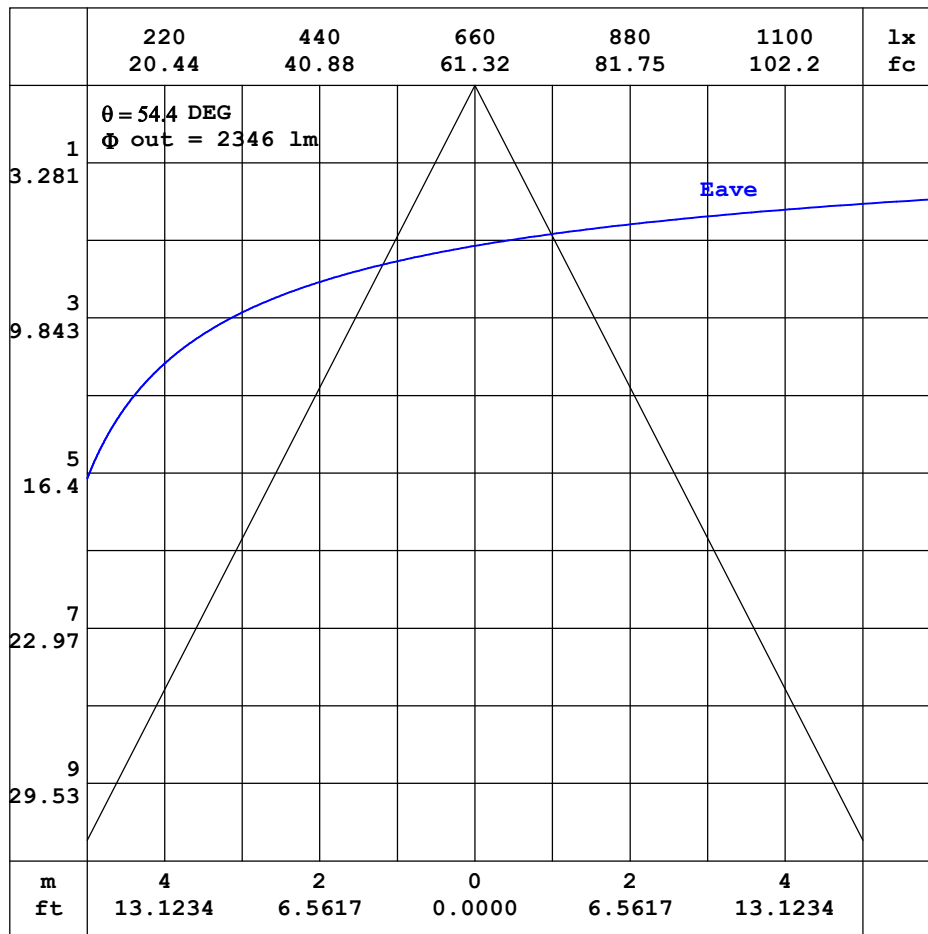


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

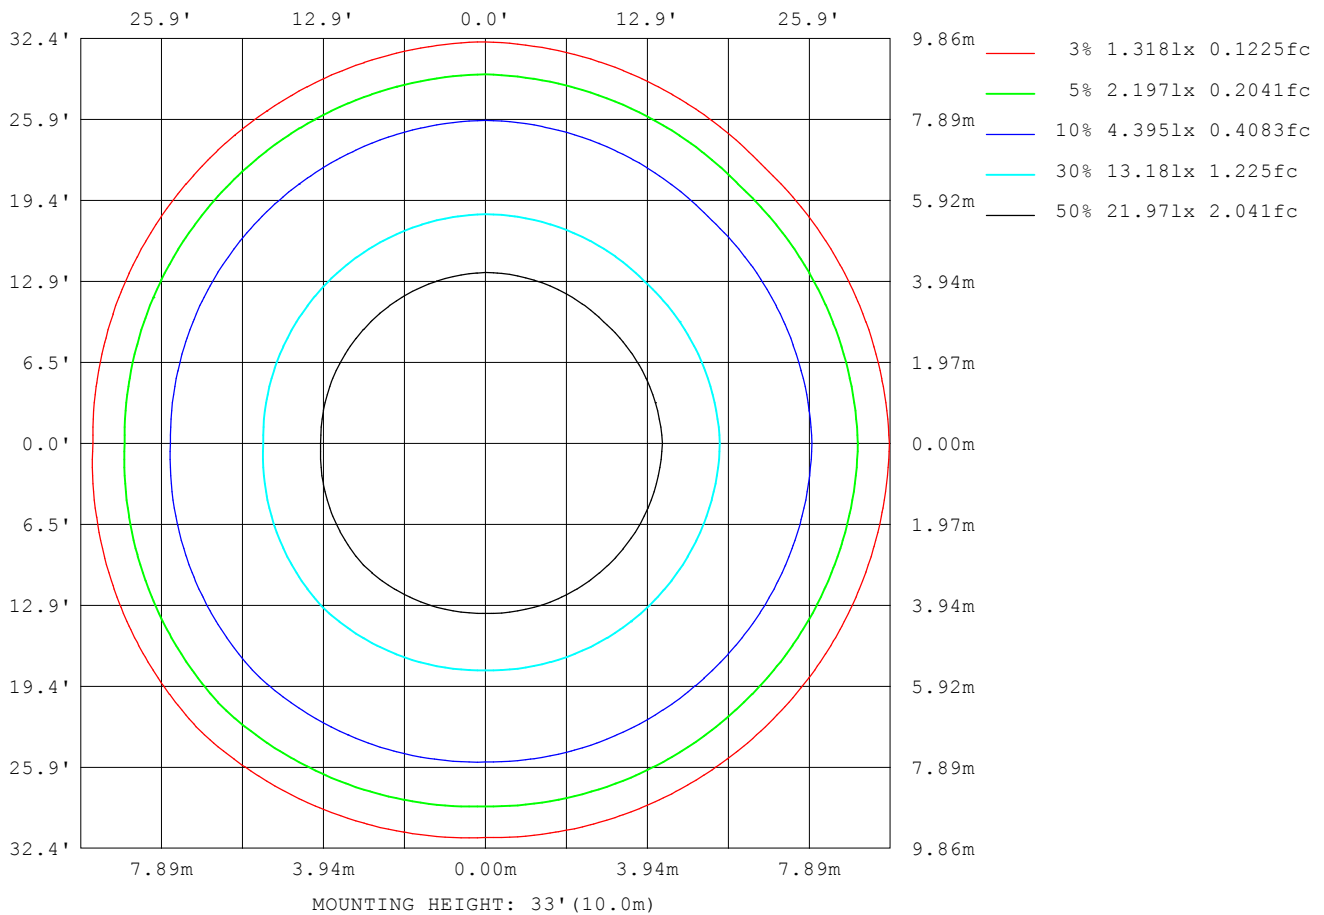

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4
L_0~180 (75) av	4
L_0~180 (85) av	5
L_90~270 (65) av	4
L_90~270 (75) av	4
L_90~270 (85) av	5
L_45 (65) av	4
L_45 (75) av	4
L_45 (85) av	5

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

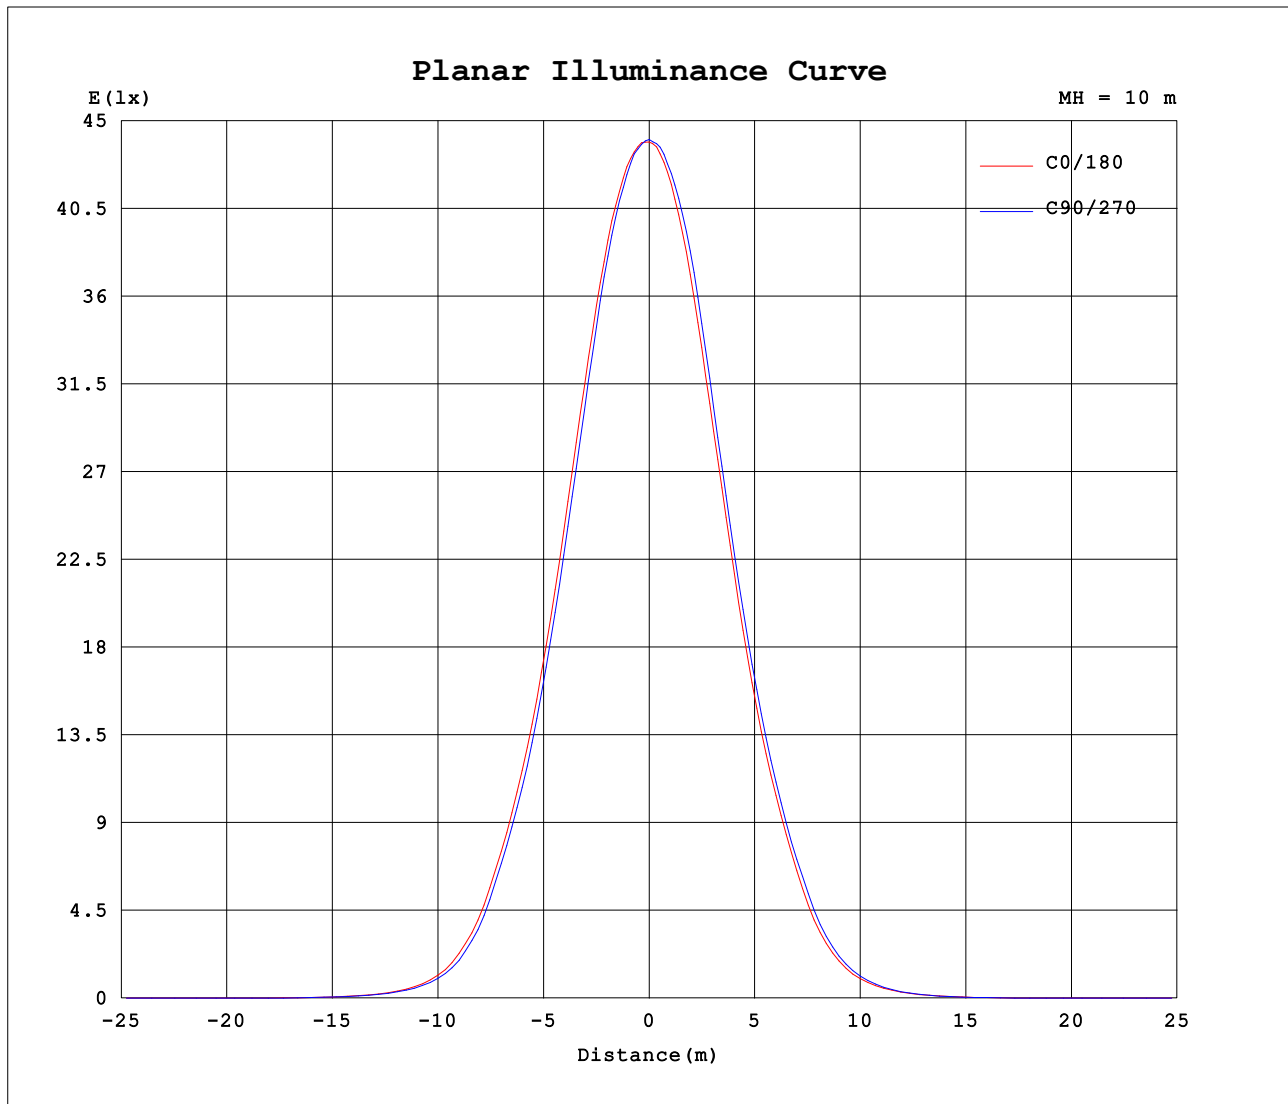

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.2V I:0.3200A P:38.60W PF:0.9950 Freq:60.00Hz Lamp Flux:3653.48x1 lm		
NAME: WL-2CLD3IN40WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4IN	SERIAL No.:
MFR.: WS	SUR.:0.029/*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4390	4396	4404	4404	4390	4396	4404	4404										
5	4357	4343	4332	4340	4285	4307	4329	4332										
10	4175	4128	4097	4119	4007	4061	4117	4098										
15	3794	3713	3670	3712	3542	3606	3689	3661										
20	3252	3156	3099	3152	2973	3022	3106	3084										
25	2617	2530	2470	2529	2351	2410	2489	2459										
30	1980	1907	1834	1920	1764	1810	1879	1835										
35	1374	1304	1259	1336	1191	1239	1296	1242										
40	747	681	660	739	627	665	705	651										
45	335	310	289	341	285	302	322	276										
50	138	138	124	147	120	130	128	106										
55	52.5	51.5	48.5	50.1	46.8	48.3	44.4	35.5										
60	15.3	15.5	13.1	14.7	10.8	14.0	12.5	8.44										
65	0.18	0.14	0.15	0.22	0.14	0.16	0.15	0.14										
70	0.12	0.10	0.11	0.12	0.11	0.11	0.11	0.11										
75	0.10	0.08	0.09	0.09	0.09	0.08	0.08	0.08										
80	0.06	0.06	0.07	0.08	0.07	0.07	0.06	0.06										
85	0.05	0.04	0.04	0.04	0.03	0.04	0.04	0.03										
90	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.02										
95	0.03	0.02	0.01	0.01	0.01	0.00	0.01	0.01										
100	0.02	0.01	0.02	0.02	0.02	0.01	0.00	0.01										
105	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.02										
110	0.05	0.04	0.04	0.03	0.02	0.04	0.02	0.03										
115	0.10	0.09	0.10	0.08	0.08	0.06	0.06	0.07										
120	0.19	0.20	0.21	0.19	0.15	0.14	0.14	0.15										
125	0.39	0.40	0.42	0.39	0.30	0.28	0.28	0.30										
130	0.67	0.69	0.71	0.69	0.51	0.49	0.49	0.53										
135	1.01	1.04	1.07	1.04	0.80	0.77	0.76	0.81										
140	1.42	1.44	1.48	1.46	1.15	1.12	1.11	1.17										
145	1.87	1.90	1.95	1.93	1.53	1.50	1.51	1.56										
150	2.33	2.38	2.37	2.42	1.95	1.92	1.93	2.00										
155	2.80	2.83	2.83	2.87	2.38	2.36	2.39	2.45										
160	3.23	3.27	3.27	3.32	2.86	2.81	2.84	2.94										
165	3.62	3.65	3.65	3.70	3.33	3.28	3.31	3.40										
170	3.94	3.93	3.93	3.99	3.74	3.67	3.69	3.79										
175	4.15	4.10	4.10	4.17	4.04	3.97	3.98	4.08										
180	4.19	4.11	4.13	4.21	4.19	4.12	4.13	4.22										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: