


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.19 lm/W			
MODEL		I _{max} (cd)	5681	S/MH(C0/180)	0.76
NOMINAL POWER(W)	20W	LOR(%)	100.0	S/MH(C90/270)	0.76
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4465.9	η UP,DN(C0-180)	0.1,50.5
NOMINAL FLUX(lm)	4465.95	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.3
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

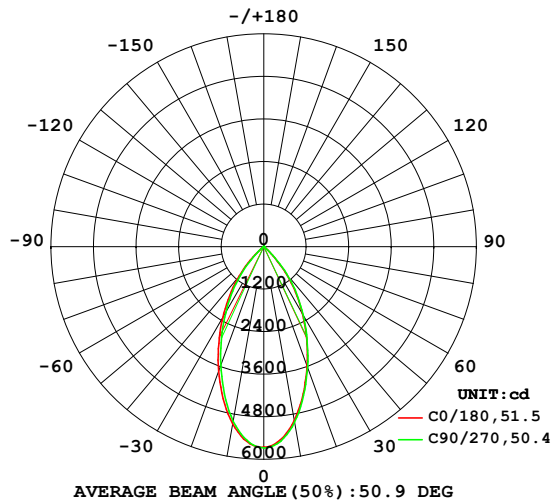

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

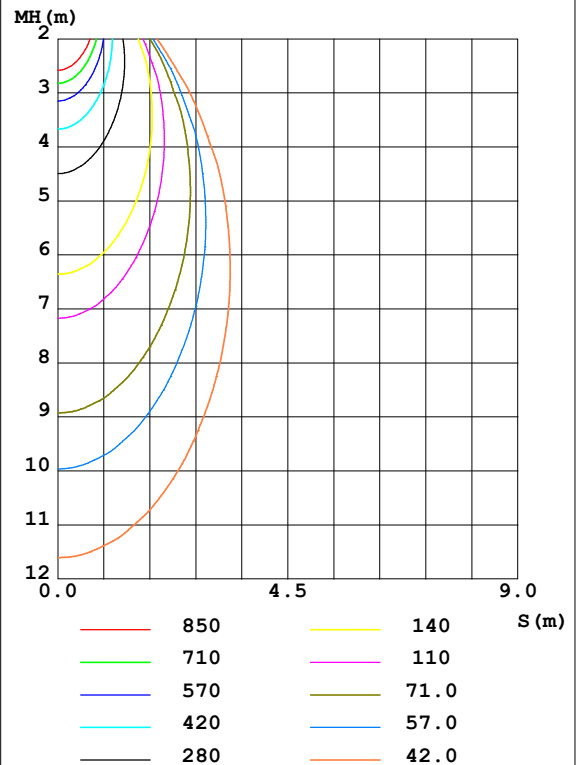

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4977	4959	5030	5184	5080	5084	4998	4838	0- 10	509.0	509.0	11.4,11.4
20	3578	3535	3621	3859	3729	3678	3558	3382	10- 20	1208	1717	38.4,38.4
30	2189	2164	2222	2468	2326	2261	2147	2014	20- 30	1326	3042	68.1,68.1
40	951.4	934.0	1000	1248	1085	1050	945.4	834.3	30- 40	992.3	4035	90.3,90.3
50	97.64	106.5	136.0	229.1	186.5	171.9	140.2	78.36	40- 50	379.2	4414	98.8,98.8
60	6.637	7.171	9.630	16.96	13.46	13.62	9.665	4.759	50- 60	43.55	4457	99.8,99.8
70	0.1212	0.1210	0.1430	0.1452	0.1404	0.1260	0.1065	0.1042	60- 70	2.594	4460	99.9,99.9
80	0.0655	0.0605	0.0776	0.0895	0.0774	0.0727	0.0605	0.0557	70- 80	0.1024	4460	99.9,99.9
90	0.0218	0.0193	0.0266	0.0290	0.0217	0.0122	0.0145	0.0121	80- 90	0.0453	4460	99.9,99.9
100	0.0122	0.0194	0.0218	0.0193	0.0049	0.0121	0.0025	0.0096	90-100	0.0165	4460	99.9,99.9
110	0.0508	0.0557	0.0459	0.0339	0.0218	0.0266	0.0291	0.0459	100-110	0.0226	4460	99.9,99.9
120	0.3095	0.2982	0.2660	0.2158	0.1747	0.1765	0.1964	0.2564	110-120	0.1112	4460	99.9,99.9
130	0.8951	0.8725	0.8153	0.7394	0.6038	0.6001	0.6473	0.7502	120-130	0.4101	4461	99.9,99.9
140	1.772	1.737	1.679	1.563	1.314	1.322	1.403	1.542	130-140	0.8573	4462	99.9,99.9
150	2.854	2.859	2.781	2.653	2.234	2.293	2.396	2.588	140-150	1.270	4463	99.9,99.9
160	3.956	3.997	3.971	3.818	3.397	3.416	3.569	3.787	150-160	1.448	4464	100,100
170	4.698	4.716	4.763	4.687	4.379	4.373	4.513	4.695	160-170	1.180	4465	100,100
180	4.890	4.856	4.974	5.035	4.914	4.868	4.994	5.040	170-180	0.4556	4466	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

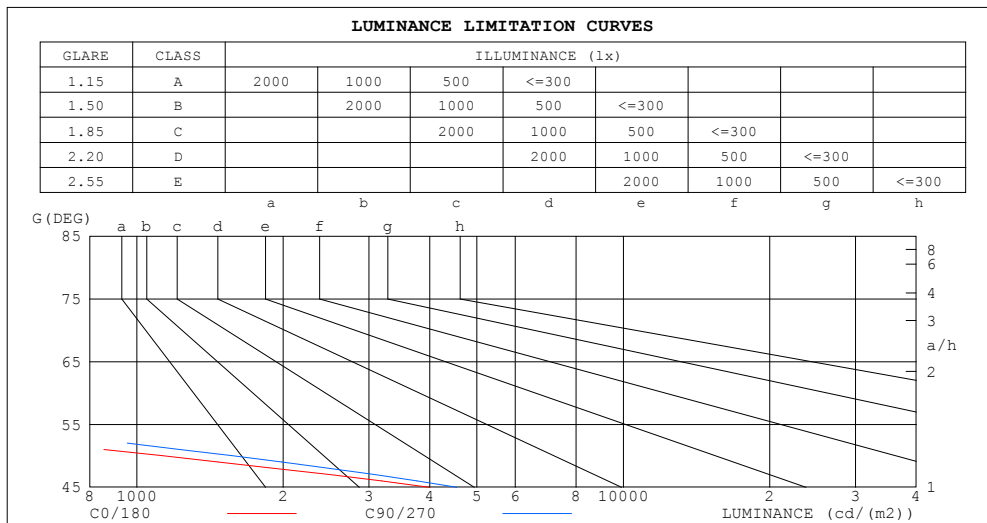


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.84	.82	.81
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.78	.72	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.70	.67	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
9.0	.65	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54
10.0	.62	.56	.52	.61	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50

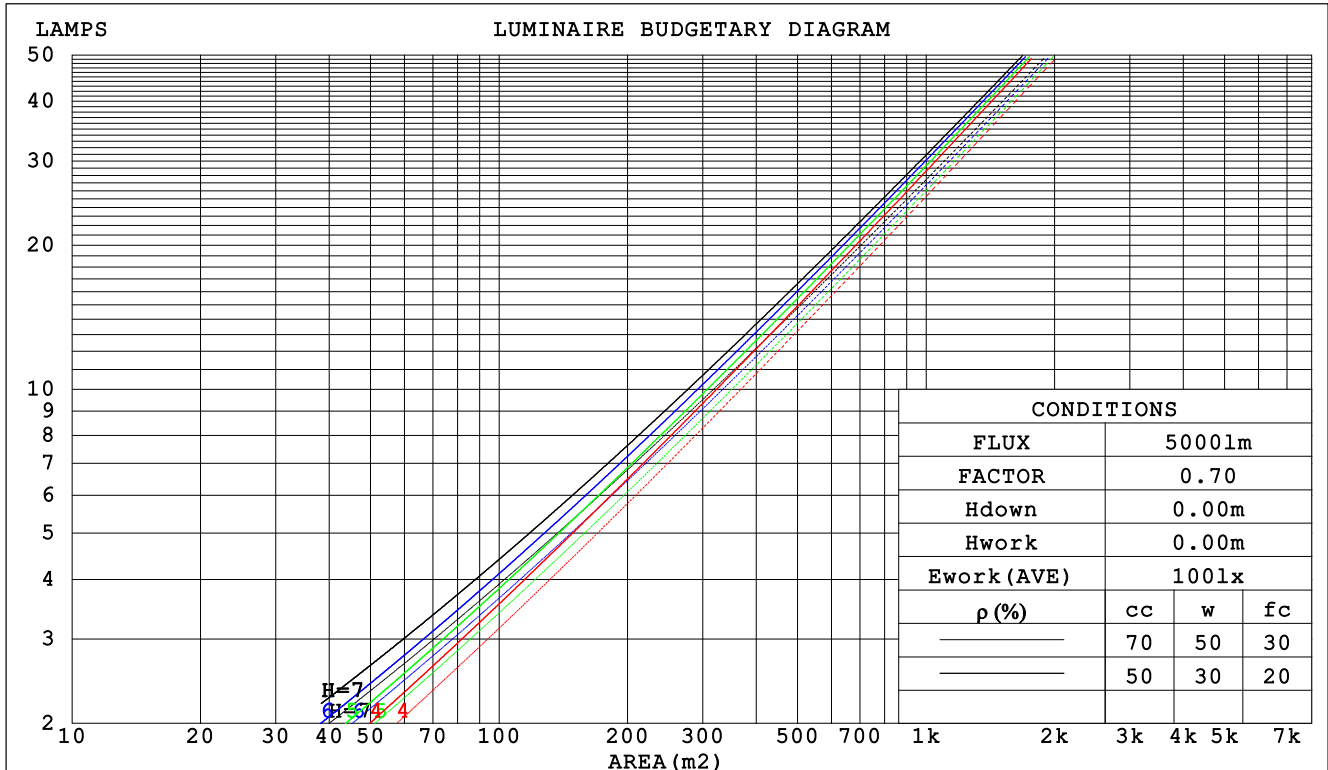

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.171	.094	.029	.166	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.133	.074	.023		
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.073	.022	.130	.071	.022		
5.0	.149	.076	.022	.146	.075	.022	.139	.072	.021	.132	.070	.021	.126	.067	.020		
6.0	.143	.071	.020	.139	.070	.020	.133	.068	.020	.128	.066	.019	.122	.064	.019		
7.0	.136	.067	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.125	.061	.017	.123	.060	.017	.119	.059	.017	.114	.057	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.135	.115	.098	.092	.080	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.080	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.109	.076	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.069	.044	.071	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.037	.067	.044	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.024	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.036	.022	.012	.012	.007	.004	
10.0	.098	.056	.028	.084	.049	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm										
NAME: WL-2CLD3IN20WB5D3HVWH-90					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 6IN			SERIAL No.:		
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.2	14.2	13.4	14.3	14.5	13.5	14.5	13.7	14.6	14.8
3H	13.0	13.9	13.3	14.1	14.3	13.3	14.2	13.6	14.4	14.6
4H	12.9	13.8	13.2	14.0	14.2	13.2	14.1	13.5	14.3	14.5
6H	12.8	13.6	13.1	13.9	14.1	13.2	13.9	13.5	14.2	14.4
8H	12.8	13.6	13.1	13.8	14.1	13.1	13.9	13.4	14.1	14.4
12H	12.8	13.5	13.1	13.7	14.0	13.1	13.8	13.4	14.0	14.3
4H 2H	12.9	13.8	13.2	14.0	14.2	13.2	14.1	13.5	14.3	14.5
3H	12.8	13.5	13.1	13.7	14.0	13.1	13.8	13.4	14.0	14.3
4H	12.7	13.3	13.0	13.6	13.9	13.0	13.6	13.3	13.9	14.2
6H	12.6	13.1	12.9	13.5	13.8	12.9	13.4	13.2	13.8	14.1
8H	12.5	13.0	12.9	13.4	13.8	12.8	13.3	13.2	13.7	14.1
12H	12.5	12.9	12.9	13.3	13.7	12.8	13.3	13.2	13.6	14.0
8H 4H	12.5	13.0	12.9	13.4	13.8	12.8	13.3	13.2	13.7	14.1
6H	12.4	12.8	12.8	13.2	13.7	12.7	13.1	13.1	13.5	14.0
8H	12.4	12.7	12.8	13.2	13.6	12.7	13.0	13.1	13.5	13.9
12H	12.3	12.6	12.8	13.1	13.5	12.6	12.9	13.1	13.4	13.9
12H 4H	12.5	12.9	12.9	13.3	13.7	12.8	13.3	13.2	13.6	14.0
6H	12.4	12.7	12.8	13.2	13.6	12.7	13.0	13.1	13.5	13.9
8H	12.3	12.6	12.8	13.1	13.5	12.6	12.9	13.1	13.4	13.9
Variations with the observer position at spacings:										
S = 1.0H	+ 2.9 / -21.2					+ 3.1 / -19.6				
1.5H	+ 5.2 / -16.5					+ 5.3 / -16.2				
2.0H	+ 7.9 / -32.1					+ 7.9 / -27.1				

CIE Pub.117 Corrected 4466 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

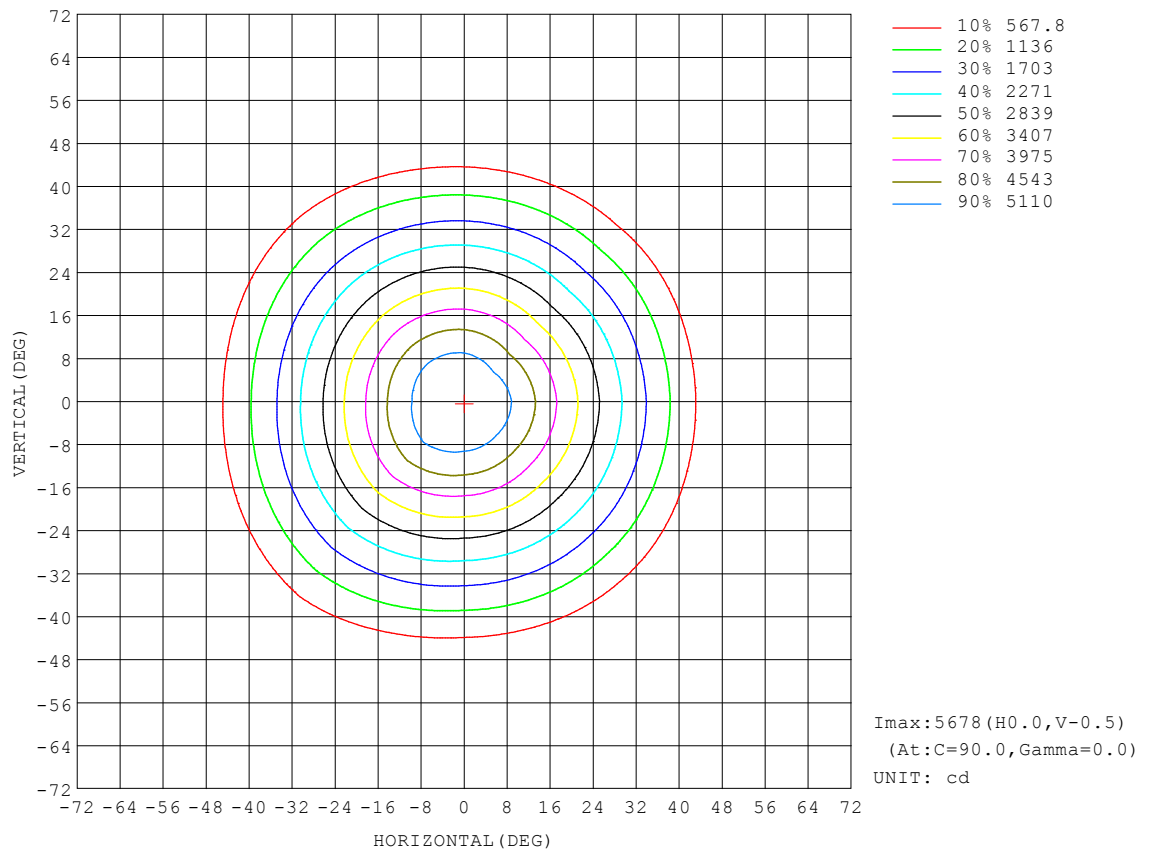


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

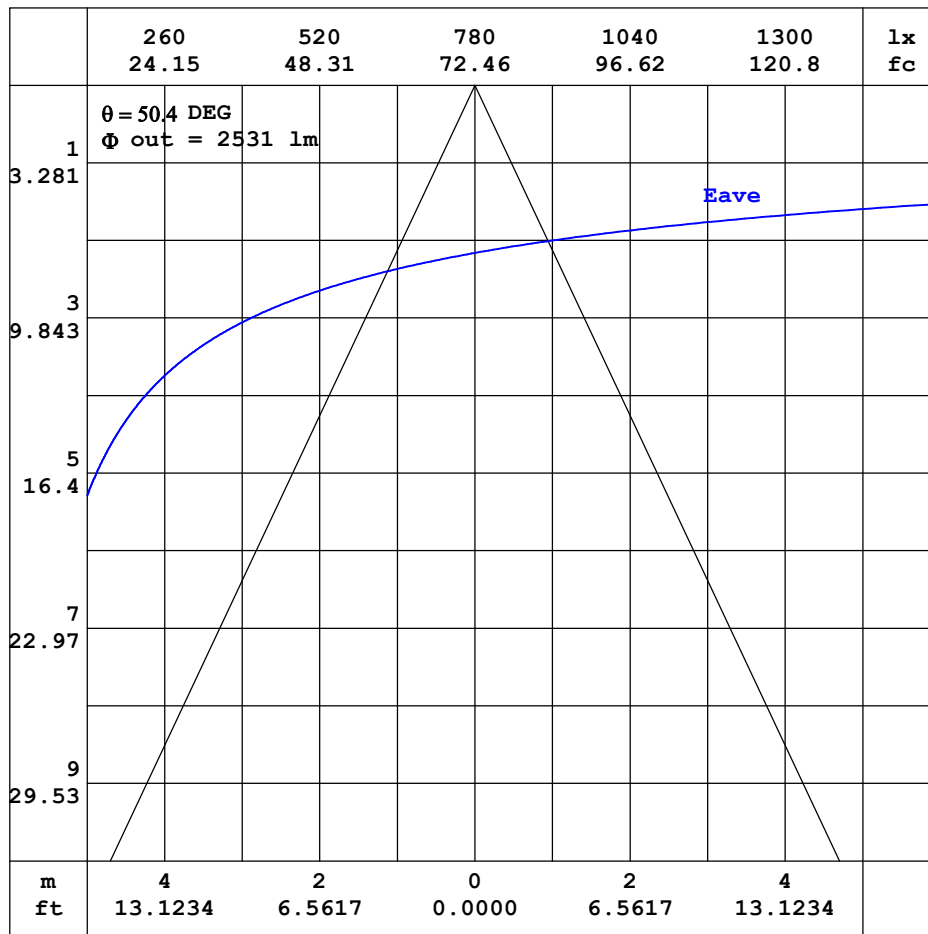


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

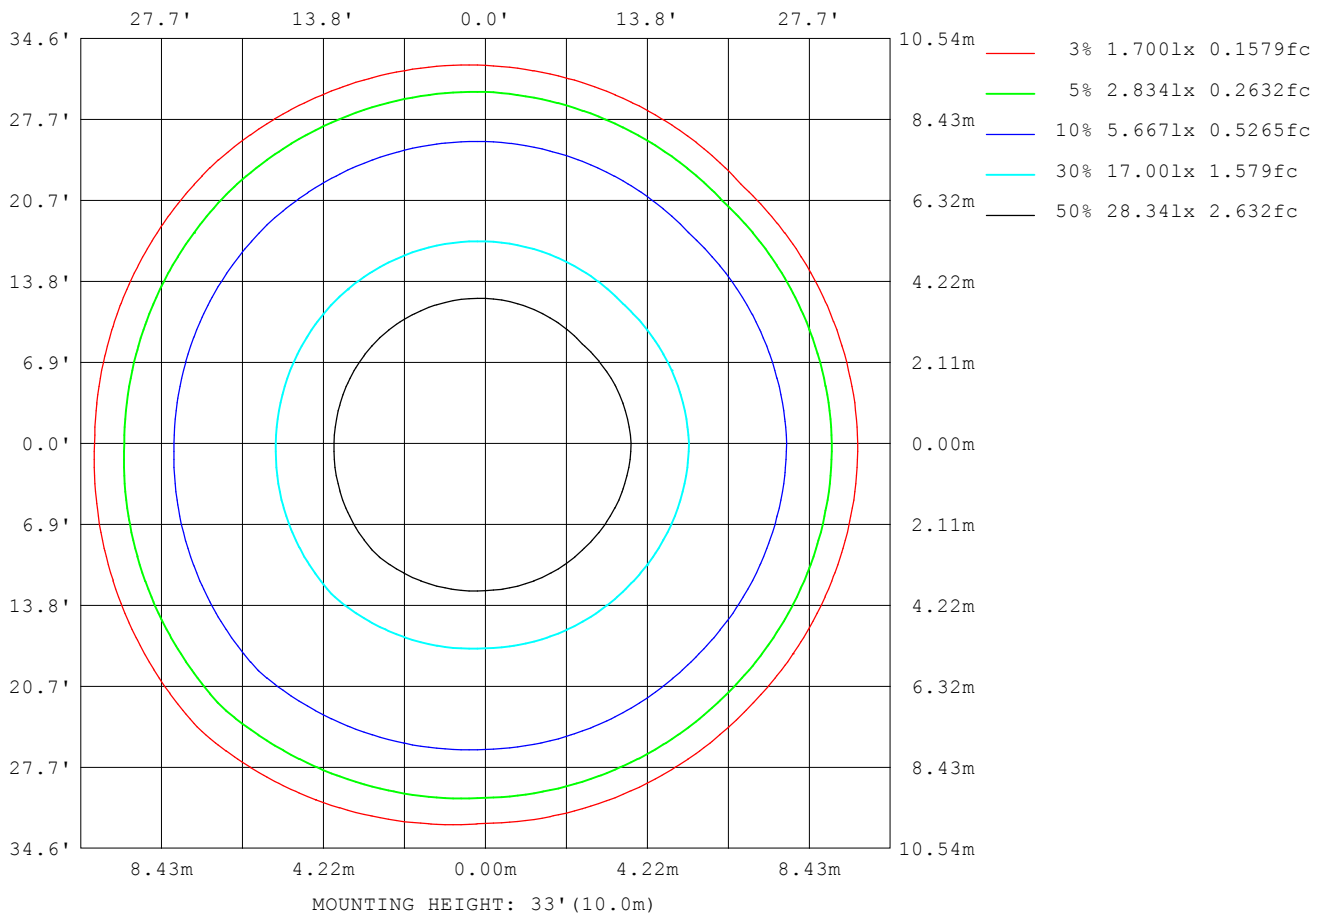

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21
L_0~180 (75) av	3
L_0~180 (85) av	4
L_90~270 (65) av	9
L_90~270 (75) av	3
L_90~270 (85) av	3
L_45 (65) av	27
L_45 (75) av	3
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

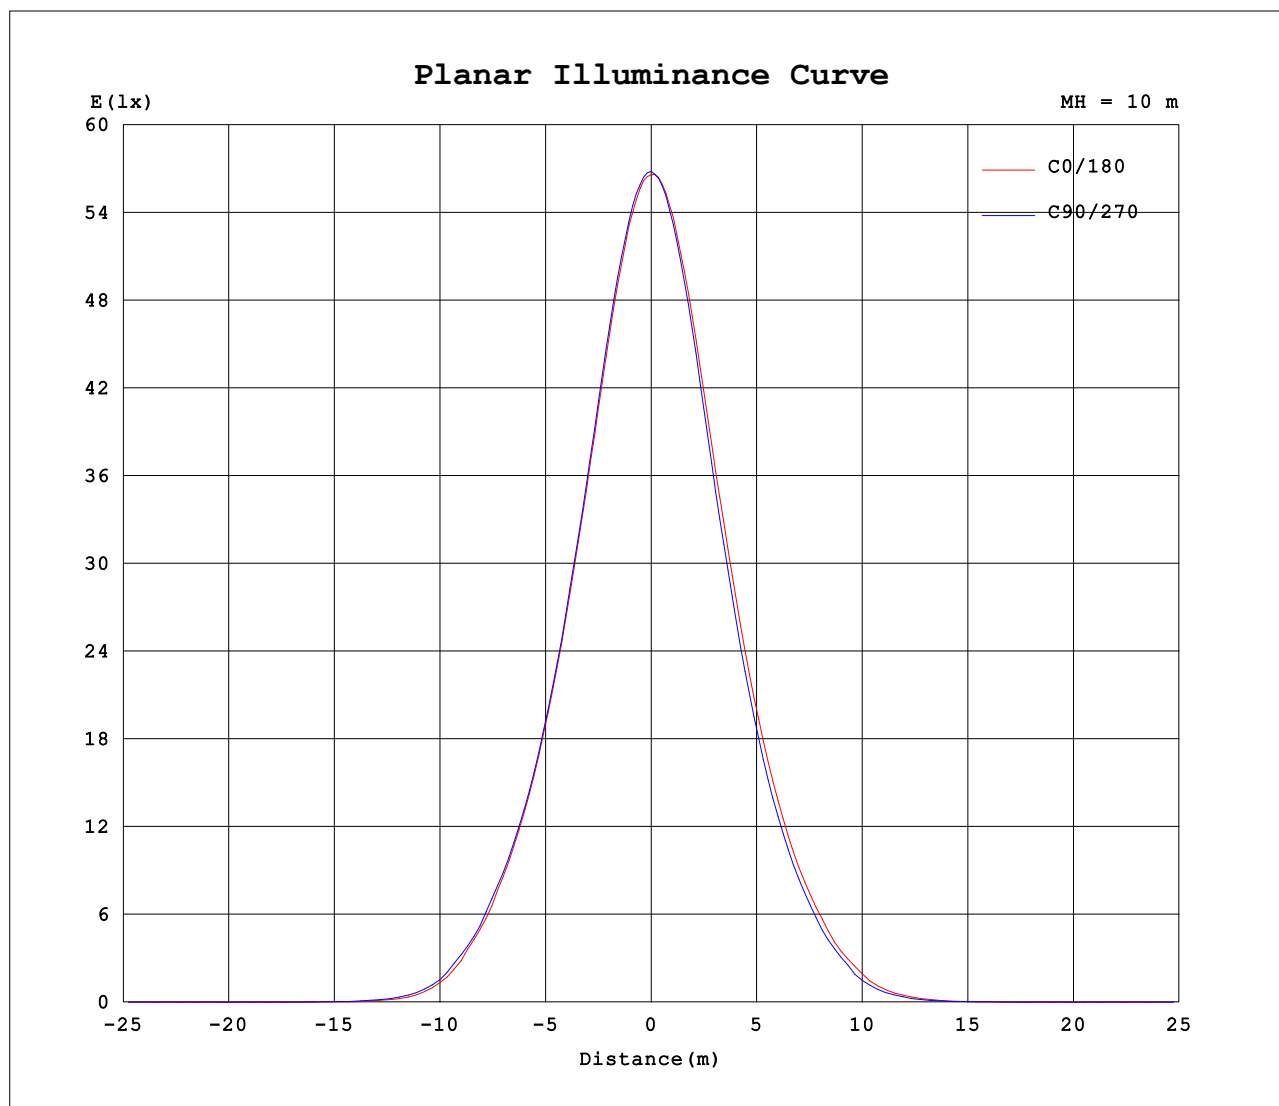

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.3430A P:40.90W PF:0.9920 Freq:60.00Hz Lamp Flux:4465.95x1 lm		
NAME: WL-2CLD3IN20WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	5657	5675	5681	5656	5657	5675	5681	5656										
5	5463	5470	5510	5579	5515	5536	5481	5385										
10	4977	4959	5030	5184	5080	5084	4998	4838										
15	4299	4265	4348	4575	4441	4418	4306	4120										
20	3578	3535	3621	3859	3729	3678	3558	3382										
25	2866	2823	2901	3140	3009	2951	2830	2679										
30	2189	2164	2222	2468	2326	2261	2147	2014										
35	1573	1552	1618	1832	1679	1634	1533	1418										
40	951	934	1000	1248	1085	1050	945	834										
45	381	380	435	682	552	531	424	312										
50	97.6	107	136	229	187	172	140	78.4										
55	22.7	25.5	34.1	61.0	46.0	47.6	32.7	19.6										
60	6.64	7.17	9.63	17.0	13.5	13.6	9.66	4.76										
65	0.15	0.15	0.58	3.83	2.24	2.08	0.46	0.14										
70	0.12	0.12	0.14	0.15	0.14	0.13	0.11	0.10										
75	0.09	0.09	0.11	0.11	0.11	0.10	0.08	0.08										
80	0.07	0.06	0.08	0.09	0.08	0.07	0.06	0.06										
85	0.04	0.03	0.05	0.06	0.05	0.05	0.03	0.03										
90	0.02	0.02	0.03	0.03	0.02	0.01	0.01	0.01										
95	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.01										
100	0.01	0.02	0.02	0.02	0.00	0.01	0.00	0.01										
105	0.03	0.03	0.03	0.02	0.01	0.00	0.01	0.02										
110	0.05	0.06	0.05	0.03	0.02	0.03	0.03	0.05										
115	0.14	0.14	0.11	0.08	0.07	0.07	0.08	0.12										
120	0.31	0.30	0.27	0.22	0.17	0.18	0.20	0.26										
125	0.56	0.55	0.50	0.43	0.34	0.35	0.38	0.46										
130	0.90	0.87	0.82	0.74	0.60	0.60	0.65	0.75										
135	1.29	1.27	1.21	1.12	0.94	0.93	0.99	1.11										
140	1.77	1.74	1.68	1.56	1.31	1.32	1.40	1.54										
145	2.29	2.28	2.21	2.08	1.75	1.78	1.86	2.04										
150	2.85	2.86	2.78	2.65	2.23	2.29	2.40	2.59										
155	3.41	3.46	3.39	3.24	2.81	2.86	2.98	3.20										
160	3.96	4.00	3.97	3.82	3.40	3.42	3.57	3.79										
165	4.38	4.43	4.43	4.29	3.95	3.95	4.09	4.31										
170	4.70	4.72	4.76	4.69	4.38	4.37	4.51	4.70										
175	4.90	4.87	4.96	4.92	4.70	4.71	4.85	4.95										
180	4.89	4.86	4.97	5.03	4.91	4.87	4.99	5.04										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: