


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 100.73 lm/W			
MODEL		I _{max} (cd)	6172	S/MH(C0/180)	0.76
NOMINAL POWER(W)	50W	LOR(%)	100.0	S/MH(C90/270)	0.76
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4845.0	η UP,DN(C0-180)	0.1,50.6
NOMINAL FLUX(lm)	4844.99	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.3
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

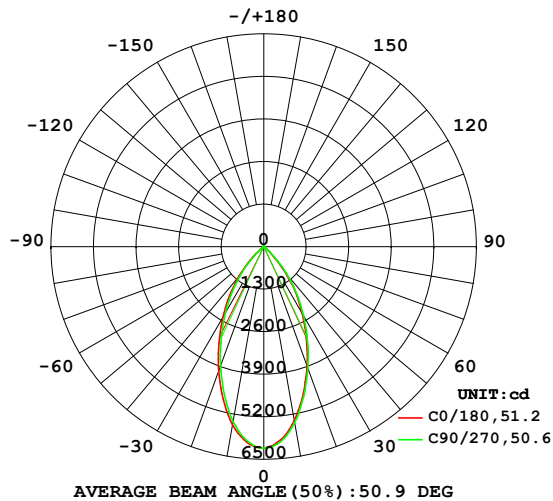

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

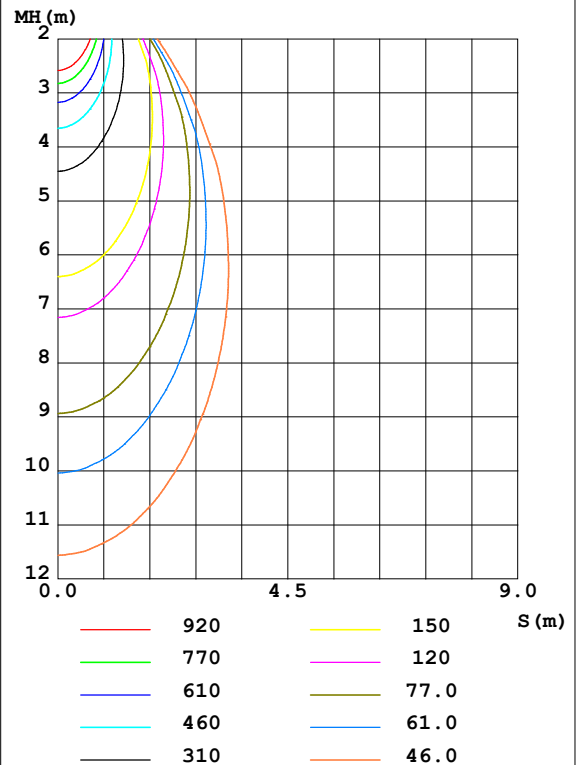

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5398	5377	5459	5633	5519	5518	5425	5234	0- 10	552.5	552.5	11.4,11.4
20	3872	3852	3944	4185	4033	4008	3878	3653	10- 20	1311	1864	38.5,38.5
30	2349	2354	2426	2673	2511	2465	2349	2174	20- 30	1439	3302	68.2,68.2
40	1028	1017	1096	1347	1172	1143	1035	895.1	30- 40	1076	4379	90.4,90.4
50	105.0	114.8	147.8	244.5	191.3	187.3	148.6	84.41	40- 50	411.1	4790	98.9,98.9
60	7.101	7.835	10.34	18.27	14.62	14.79	10.55	5.140	50- 60	46.86	4837	99.8,99.8
70	0.1237	0.1379	0.1430	0.1646	0.1476	0.1429	0.1162	0.1236	60- 70	2.806	4839	99.9,99.9
80	0.0655	0.0702	0.0776	0.0920	0.0895	0.0872	0.0702	0.0558	70- 80	0.1110	4840	99.9,99.9
90	0.0194	0.0194	0.0290	0.0314	0.0146	0.0218	0.0145	0.0169	80- 90	0.0514	4840	99.9,99.9
100	0.0218	0.0267	0.0146	0.0266	0.0098	0.0169	0.0073	0.0242	90-100	0.0203	4840	99.9,99.9
110	0.0508	0.0437	0.0363	0.0291	0.0267	0.0339	0.0291	0.0532	100-110	0.0264	4840	99.9,99.9
120	0.2129	0.2037	0.1789	0.1479	0.1820	0.1959	0.2038	0.2830	110-120	0.0998	4840	99.9,99.9
130	0.6531	0.6520	0.6071	0.5310	0.6547	0.6461	0.6959	0.8179	120-130	0.3590	4840	99.9,99.9
140	1.394	1.393	1.338	1.221	1.442	1.443	1.515	1.653	130-140	0.7802	4841	99.9,99.9
150	2.367	2.413	2.346	2.190	2.440	2.462	2.576	2.750	140-150	1.191	4842	99.9,99.9
160	3.477	3.529	3.477	3.314	3.576	3.571	3.706	3.845	150-160	1.375	4843	100,100
170	4.361	4.401	4.366	4.263	4.491	4.405	4.546	4.637	160-170	1.129	4845	100,100
180	4.764	4.768	4.844	4.834	4.805	4.749	4.810	4.834	170-180	0.4400	4845	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

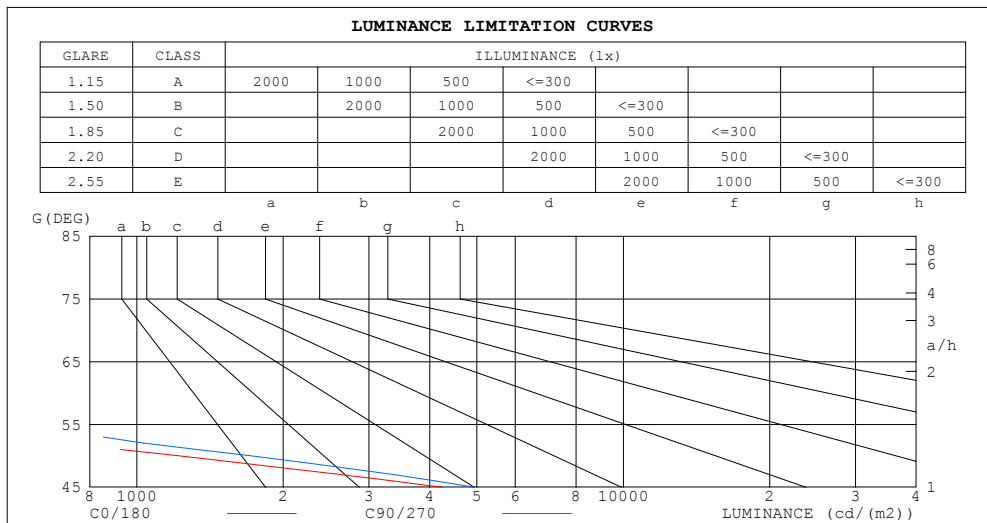

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3	4
80	3	3
75	3	3
70	3	3
65	3	10
60	105	153
55	318	472
50	1210	1704
45	4239	4950


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.79	.73	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.70	.67	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
9.0	.66	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54
10.0	.62	.56	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50

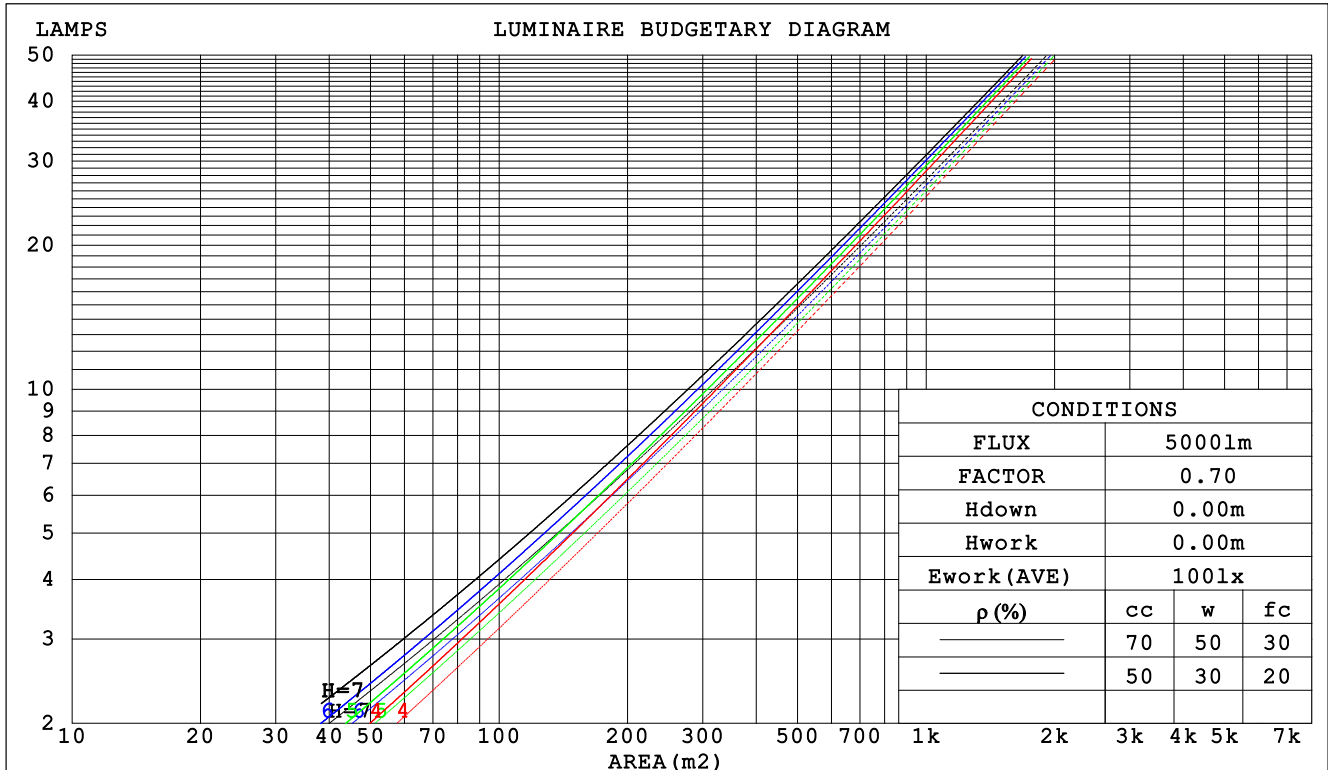

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.171	.094	.029	.166	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.133	.074	.023		
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.073	.022	.130	.071	.022		
5.0	.149	.076	.022	.146	.075	.022	.139	.072	.021	.132	.070	.021	.126	.067	.020		
6.0	.143	.071	.020	.139	.070	.020	.133	.068	.020	.128	.066	.019	.122	.064	.019		
7.0	.136	.067	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.125	.061	.017	.123	.060	.017	.119	.059	.017	.114	.057	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.113	.134	.115	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.063	.080	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.109	.076	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.068	.044	.071	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.113	.071	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.013	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.098	.056	.028	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm										
NAME: WL-2CLD6IN50WB5D3HVWH					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.: 6IN			SERIAL No.:		
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.5	14.4	13.7	14.6	14.8	13.8	14.8	14.0	14.9	15.1
3H	13.3	14.2	13.6	14.4	14.6	13.6	14.5	13.9	14.7	14.9
4H	13.2	14.0	13.5	14.3	14.5	13.6	14.4	13.8	14.6	14.8
6H	13.1	13.9	13.4	14.1	14.4	13.5	14.2	13.8	14.5	14.7
8H	13.1	13.8	13.4	14.1	14.3	13.4	14.2	13.7	14.4	14.7
12H	13.0	13.7	13.4	14.0	14.3	13.4	14.1	13.7	14.4	14.6
4H 2H	13.2	14.0	13.5	14.3	14.5	13.6	14.4	13.8	14.6	14.8
3H	13.0	13.7	13.4	14.0	14.3	13.4	14.1	13.7	14.4	14.6
4H	12.9	13.6	13.3	13.9	14.2	13.3	13.9	13.6	14.2	14.5
6H	12.8	13.4	13.2	13.7	14.1	13.2	13.7	13.6	14.1	14.4
8H	12.8	13.3	13.2	13.7	14.0	13.1	13.7	13.5	14.0	14.4
12H	12.7	13.2	13.2	13.6	14.0	13.1	13.6	13.5	13.9	14.3
8H 4H	12.8	13.3	13.2	13.7	14.0	13.1	13.7	13.5	14.0	14.4
6H	12.7	13.1	13.1	13.5	13.9	13.0	13.5	13.5	13.9	14.3
8H	12.6	13.0	13.1	13.4	13.9	13.0	13.4	13.4	13.8	14.2
12H	12.6	12.9	13.1	13.3	13.8	12.9	13.2	13.4	13.7	14.2
12H 4H	12.7	13.2	13.2	13.6	14.0	13.1	13.6	13.5	13.9	14.3
6H	12.6	13.0	13.1	13.4	13.9	13.0	13.4	13.4	13.8	14.2
8H	12.6	12.9	13.1	13.3	13.8	12.9	13.2	13.4	13.7	14.2
Variations with the observer position at spacings:										
S = 1.0H	+ 2.9 / -21.3					+ 3.1 / -19.7				
1.5H	+ 5.2 / -16.5					+ 5.3 / -16.2				
2.0H	+ 7.9 / -32.2					+ 7.9 / -27.2				

CIE Pub.117 Corrected 4845 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	101	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

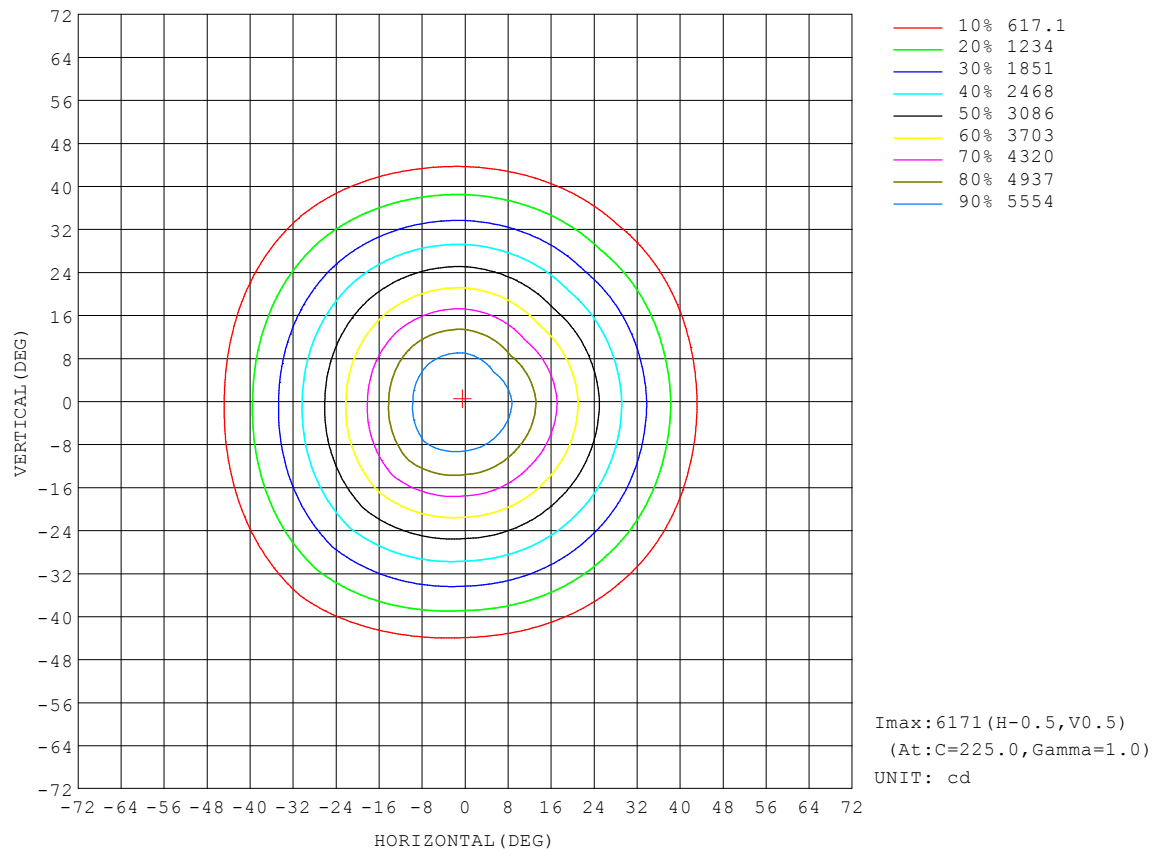


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

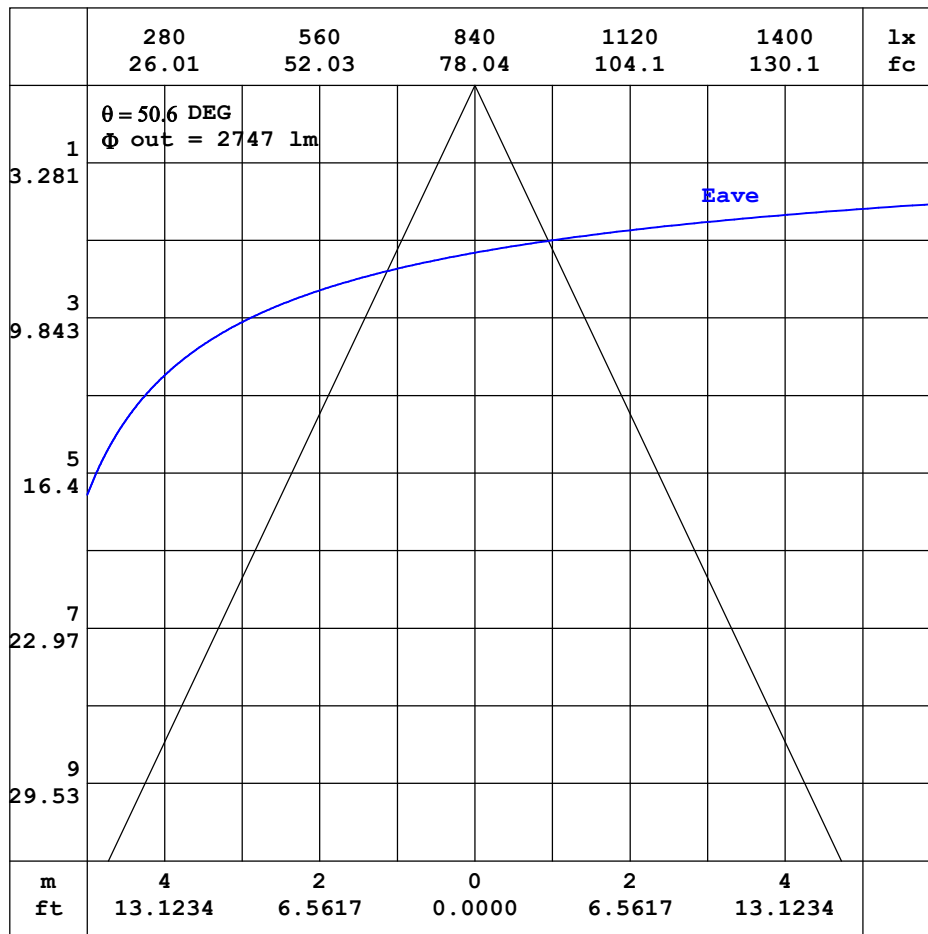


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

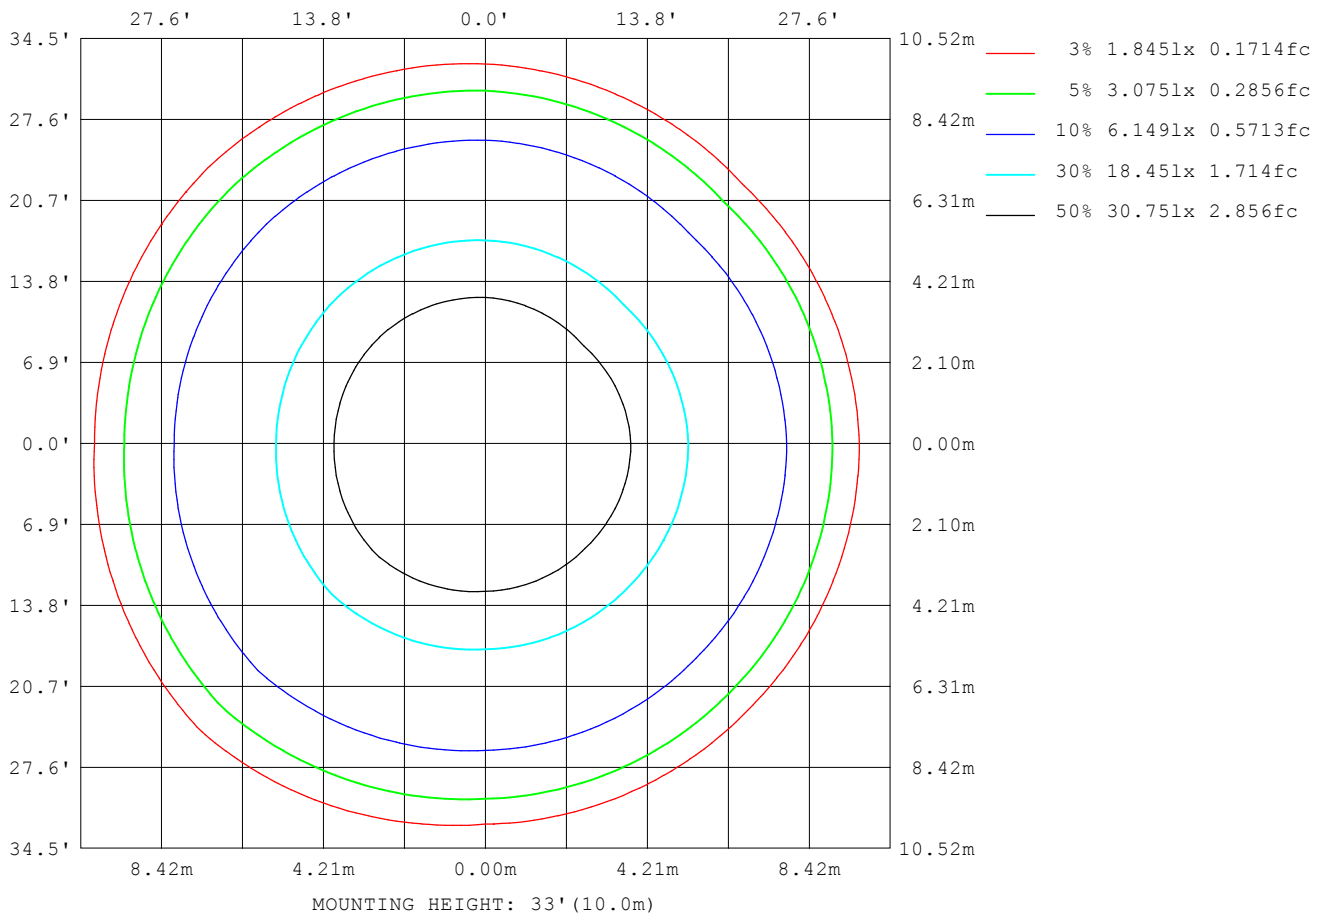

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	23
L_0~180 (75) av	3
L_0~180 (85) av	4
L_90~270 (65) av	10
L_90~270 (75) av	3
L_90~270 (85) av	4
L_45 (65) av	29
L_45 (75) av	3
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

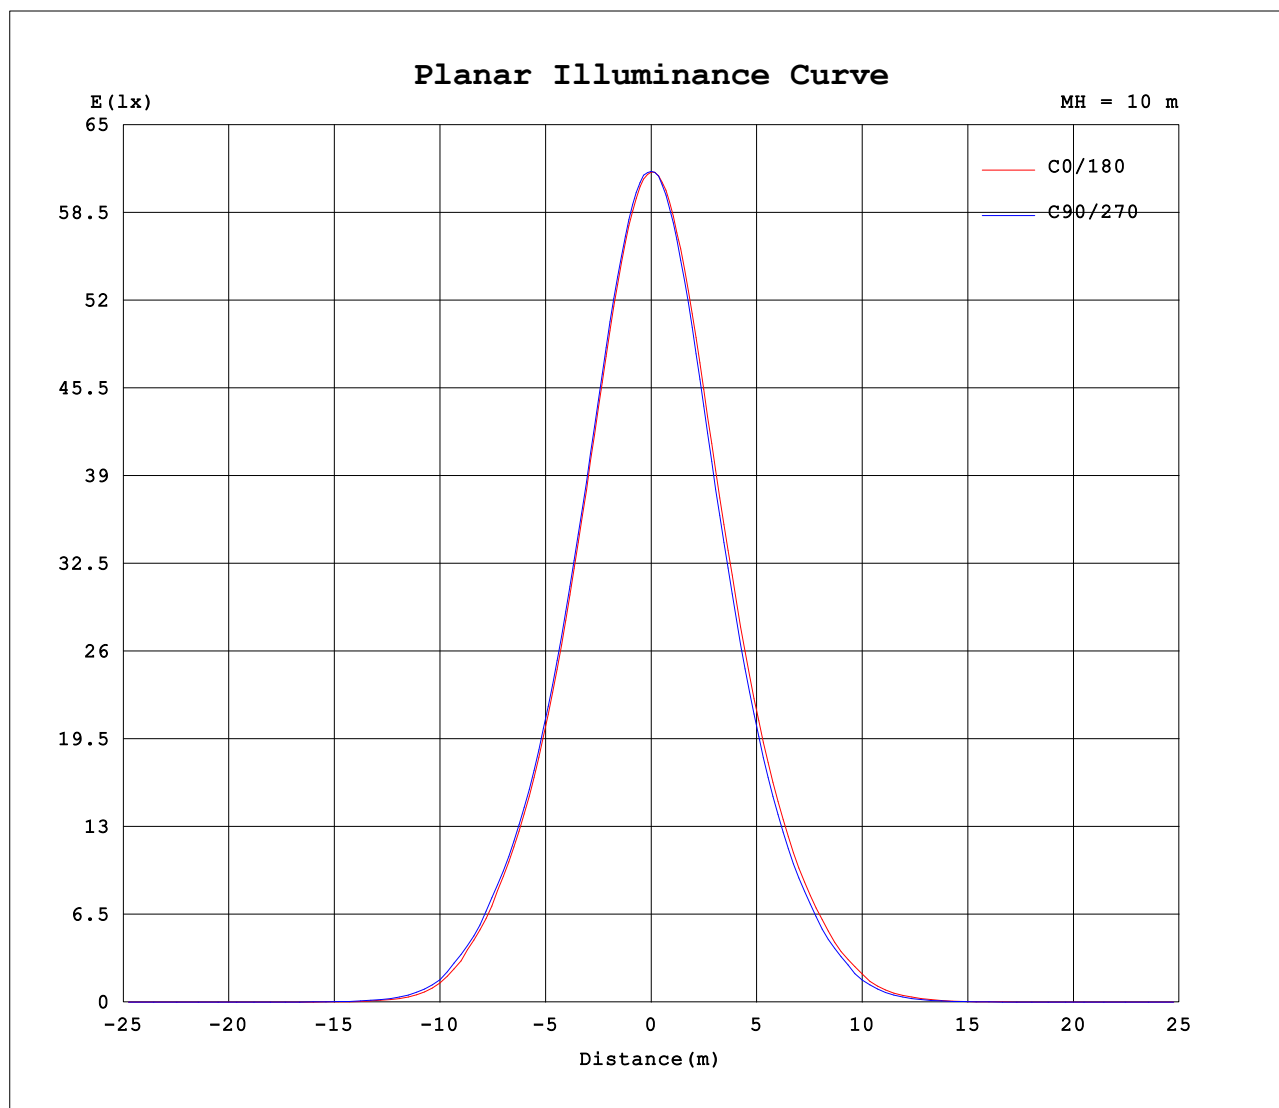

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.4030A P:48.10W PF:0.9930 Freq:60.00Hz Lamp Flux:4844.99x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	6149	6170	6156	6143	6149	6170	6156	6143										
5	5928	5936	5979	6057	5997	6010	5951	5843										
10	5398	5377	5459	5633	5519	5518	5425	5234										
15	4667	4635	4734	4963	4810	4797	4676	4455										
20	3872	3852	3944	4185	4033	4008	3878	3653										
25	3085	3083	3163	3400	3255	3215	3089	2889										
30	2349	2354	2426	2673	2511	2465	2349	2174										
35	1697	1691	1770	1978	1809	1777	1678	1526										
40	1028	1017	1096	1347	1172	1143	1035	895										
45	405	414	473	735	594	585	467	332										
50	105	115	148	244	191	187	149	84.4										
55	24.6	27.3	36.6	65.6	49.9	54.5	35.3	21.0										
60	7.10	7.84	10.3	18.3	14.6	14.8	10.5	5.14										
65	0.16	0.17	0.58	4.12	2.45	2.23	0.51	0.15										
70	0.12	0.14	0.14	0.16	0.15	0.14	0.12	0.12										
75	0.09	0.10	0.11	0.13	0.12	0.11	0.09	0.08										
80	0.07	0.07	0.08	0.09	0.09	0.09	0.07	0.06										
85	0.04	0.05	0.05	0.06	0.05	0.05	0.04	0.03										
90	0.02	0.02	0.03	0.03	0.01	0.02	0.01	0.02										
95	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02										
100	0.02	0.03	0.01	0.03	0.01	0.02	0.01	0.02										
105	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02										
110	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.05										
115	0.10	0.10	0.08	0.07	0.08	0.08	0.09	0.13										
120	0.21	0.20	0.18	0.15	0.18	0.20	0.20	0.28										
125	0.40	0.39	0.36	0.31	0.39	0.39	0.41	0.51										
130	0.65	0.65	0.61	0.53	0.65	0.65	0.70	0.82										
135	1.00	0.97	0.93	0.85	1.02	1.02	1.06	1.21										
140	1.39	1.39	1.34	1.22	1.44	1.44	1.51	1.65										
145	1.86	1.87	1.81	1.68	1.91	1.92	2.01	2.19										
150	2.37	2.41	2.35	2.19	2.44	2.46	2.58	2.75										
155	2.92	2.98	2.92	2.74	2.99	3.03	3.15	3.32										
160	3.48	3.53	3.48	3.31	3.58	3.57	3.71	3.85										
165	3.98	4.00	3.97	3.83	4.09	4.04	4.18	4.29										
170	4.36	4.40	4.37	4.26	4.49	4.40	4.55	4.64										
175	4.62	4.65	4.67	4.62	4.76	4.63	4.77	4.86										
180	4.76	4.77	4.84	4.83	4.80	4.75	4.81	4.83										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: