


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.33 lm/W			
MODEL		I _{max} (cd)	6606	S/MH(C0/180)	0.76
NOMINAL POWER(W)	50W	LOR(%)	100.0	S/MH(C90/270)	0.76
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	5200.0	η UP,DN(C0-180)	0.1,50.6
NOMINAL FLUX(lm)	5200.03	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.3
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

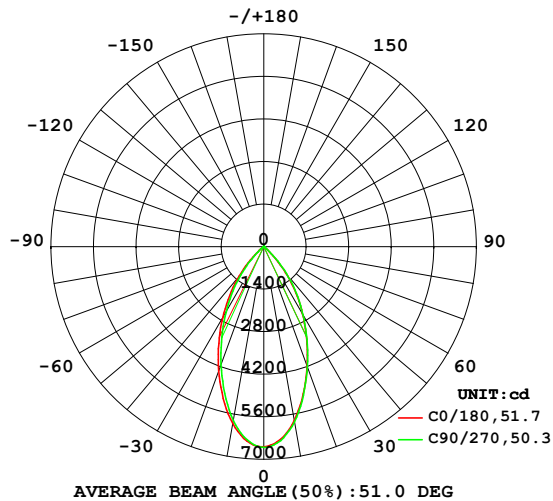

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

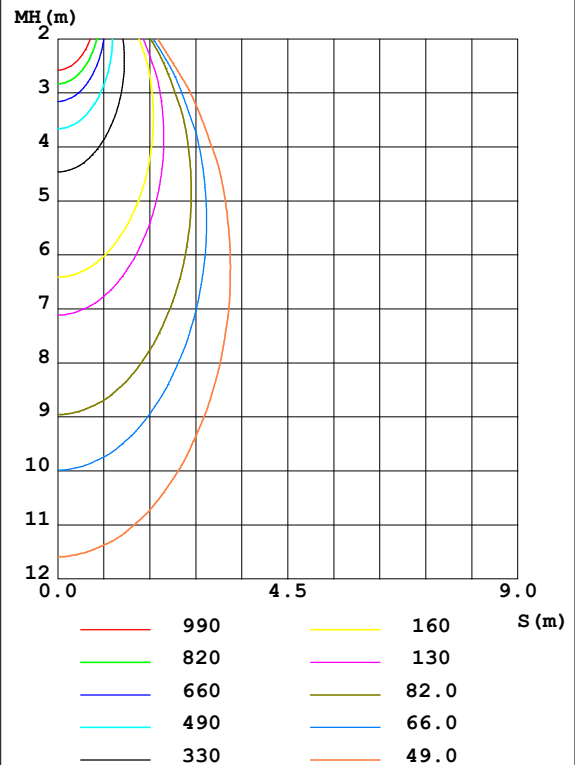

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5807	5765	5853	6038	5902	5910	5807	5635	0- 10	592.2	592.2	11.4,11.4
20	4182	4110	4206	4491	4340	4266	4131	3941	10- 20	1405	1998	38.4,38.4
30	2567	2517	2578	2881	2710	2620	2481	2351	20- 30	1543	3541	68.1,68.1
40	1130	1085	1167	1453	1267	1222	1093	978.0	30- 40	1156	4697	90.3,90.3
50	116.0	135.7	159.6	268.4	207.9	199.6	155.3	91.71	40- 50	443.3	5140	98.8,98.8
60	7.857	8.470	11.45	19.96	15.66	15.99	11.23	5.606	50- 60	50.96	5191	99.8,99.8
70	0.1502	0.1476	0.1696	0.1767	0.1647	0.1575	0.1356	0.1284	60- 70	3.038	5194	99.9,99.9
80	0.0848	0.0774	0.0969	0.1016	0.1041	0.0945	0.0725	0.0678	70- 80	0.1266	5194	99.9,99.9
90	0.0267	0.0266	0.0291	0.0362	0.0290	0.0243	0.0193	0.0194	80- 90	0.0585	5194	99.9,99.9
100	0.0267	0.0242	0.0314	0.0170	0.0266	0.0146	0.0242	0.0218	90-100	0.0232	5194	99.9,99.9
110	0.0556	0.0485	0.0484	0.0292	0.0364	0.0339	0.0437	0.0604	100-110	0.0298	5194	99.9,99.9
120	0.2418	0.2231	0.2055	0.1698	0.2183	0.2056	0.2305	0.3025	110-120	0.1117	5194	99.9,99.9
130	0.7281	0.7054	0.6556	0.5867	0.7226	0.7090	0.7615	0.8977	120-130	0.3937	5195	99.9,99.9
140	1.549	1.502	1.459	1.352	1.568	1.532	1.651	1.813	130-140	0.8511	5196	99.9,99.9
150	2.602	2.595	2.578	2.401	2.646	2.627	2.801	2.963	140-150	1.295	5197	99.9,99.9
160	3.791	3.796	3.767	3.629	3.864	3.884	4.012	4.145	150-160	1.493	5198	100,100
170	4.744	4.728	4.780	4.638	4.840	4.858	4.941	5.022	160-170	1.227	5200	100,100
180	5.171	5.083	5.270	5.270	5.258	5.151	5.190	5.241	170-180	0.4782	5200	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

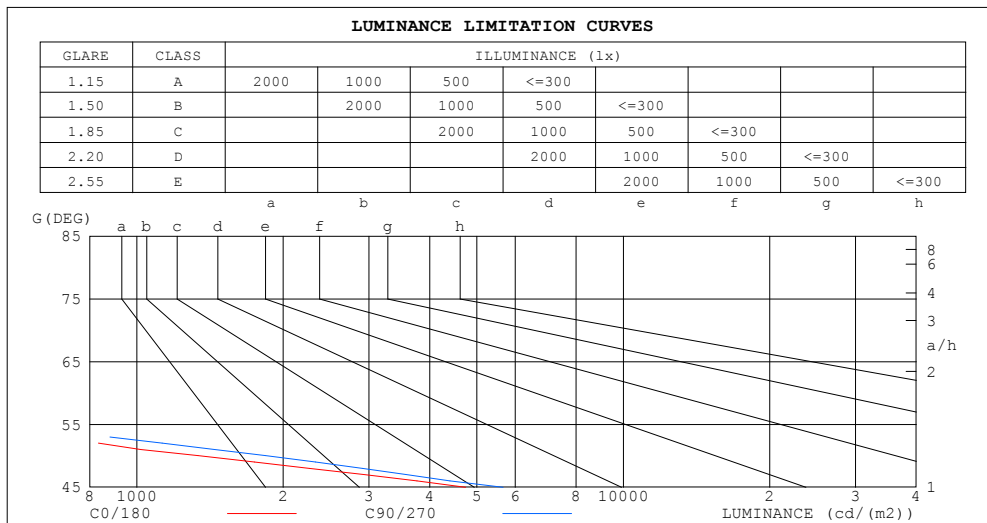

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4	5
80	4	4
75	3	4
70	3	4
65	3	13
60	116	170
55	347	528
50	1336	1840
45	4739	5662


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.84	.82	.81
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.78	.72	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.70	.67	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.61	.58	.57
9.0	.65	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54
10.0	.62	.56	.52	.61	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50

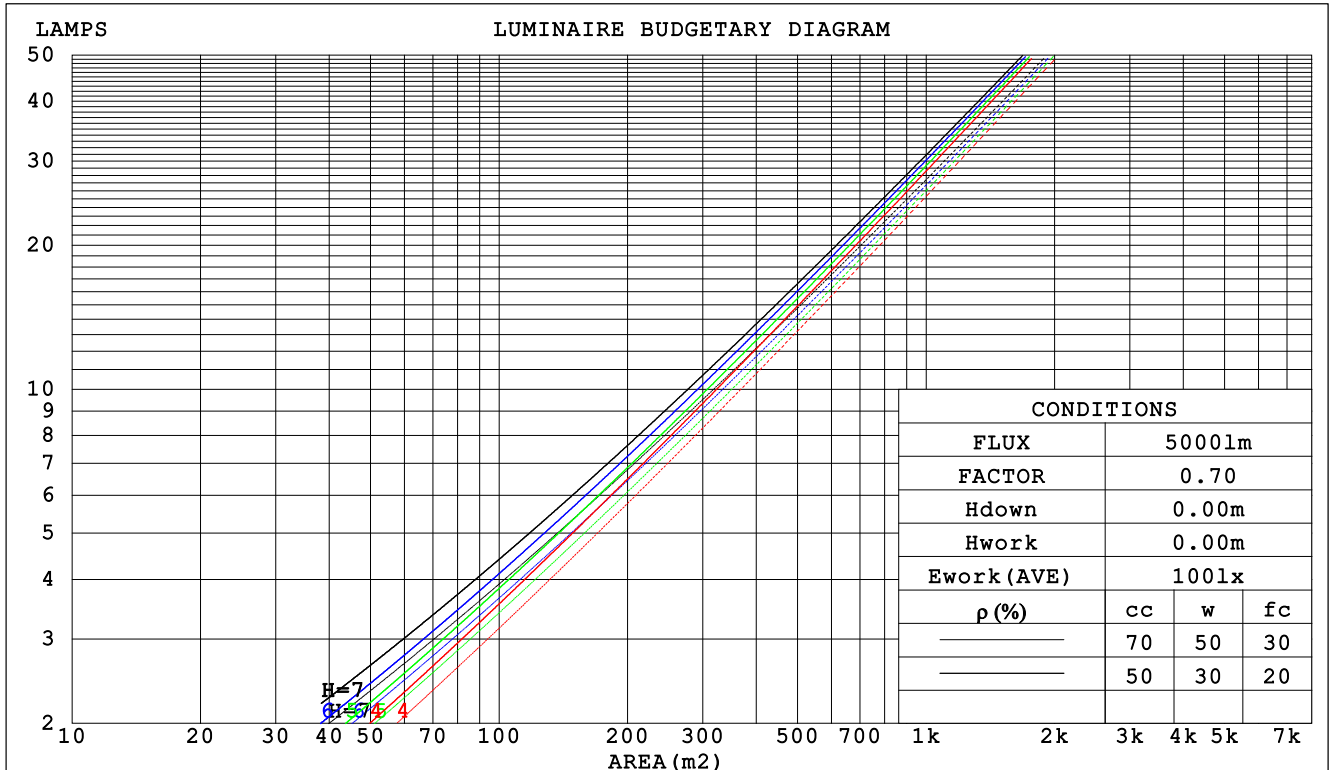

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.171	.094	.029	.166	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.133	.074	.023		
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.074	.022	.130	.071	.022		
5.0	.149	.076	.022	.146	.075	.022	.139	.072	.021	.132	.070	.021	.126	.068	.020		
6.0	.143	.072	.020	.139	.070	.020	.133	.068	.020	.128	.066	.020	.122	.064	.019		
7.0	.136	.067	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.062	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.125	.061	.017	.123	.060	.017	.119	.059	.017	.114	.057	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.113	.135	.115	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.063	.080	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.109	.076	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.068	.044	.071	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.013	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.036	.022	.012	.011	.007	.004	
10.0	.098	.056	.028	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm										
NAME: WL-2CLD6IN50WB5D3HVWH					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.: 6IN			SERIAL No.:		
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.8	14.8	14.0	14.9	15.1	14.0	15.0	14.3	15.2	15.3
3H	13.6	14.5	13.9	14.7	14.9	13.9	14.7	14.1	14.9	15.1
4H	13.5	14.4	13.8	14.6	14.8	13.8	14.6	14.0	14.8	15.0
6H	13.4	14.2	13.7	14.5	14.7	13.7	14.5	14.0	14.7	14.9
8H	13.4	14.1	13.7	14.4	14.7	13.6	14.4	13.9	14.6	14.9
12H	13.4	14.1	13.7	14.3	14.6	13.6	14.3	13.9	14.6	14.8
4H 2H	13.5	14.4	13.8	14.6	14.8	13.8	14.6	14.0	14.8	15.0
3H	13.4	14.1	13.7	14.3	14.6	13.6	14.3	13.9	14.6	14.9
4H	13.3	13.9	13.6	14.2	14.5	13.5	14.1	13.8	14.4	14.8
6H	13.2	13.7	13.5	14.1	14.4	13.4	14.0	13.8	14.3	14.6
8H	13.1	13.6	13.5	14.0	14.4	13.3	13.9	13.7	14.2	14.6
12H	13.1	13.5	13.5	13.9	14.3	13.3	13.8	13.7	14.1	14.5
8H 4H	13.1	13.6	13.5	14.0	14.4	13.3	13.9	13.7	14.2	14.6
6H	13.0	13.4	13.4	13.8	14.3	13.2	13.7	13.7	14.1	14.5
8H	13.0	13.3	13.4	13.8	14.2	13.2	13.6	13.6	14.0	14.4
12H	12.9	13.2	13.4	13.7	14.1	13.1	13.5	13.6	13.9	14.4
12H 4H	13.1	13.5	13.5	13.9	14.3	13.3	13.8	13.7	14.1	14.5
6H	13.0	13.3	13.4	13.8	14.2	13.2	13.6	13.6	14.0	14.4
8H	12.9	13.2	13.4	13.7	14.1	13.1	13.5	13.6	13.9	14.4
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -21.2					+ 3.1 / -19.5				
1.5H	+ 5.3 / -16.5					+ 5.3 / -16.1				
2.0H	+ 8.0 / -31.7					+ 8.2 / -27.1				

CIE Pub.117 Corrected 5200 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	74	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

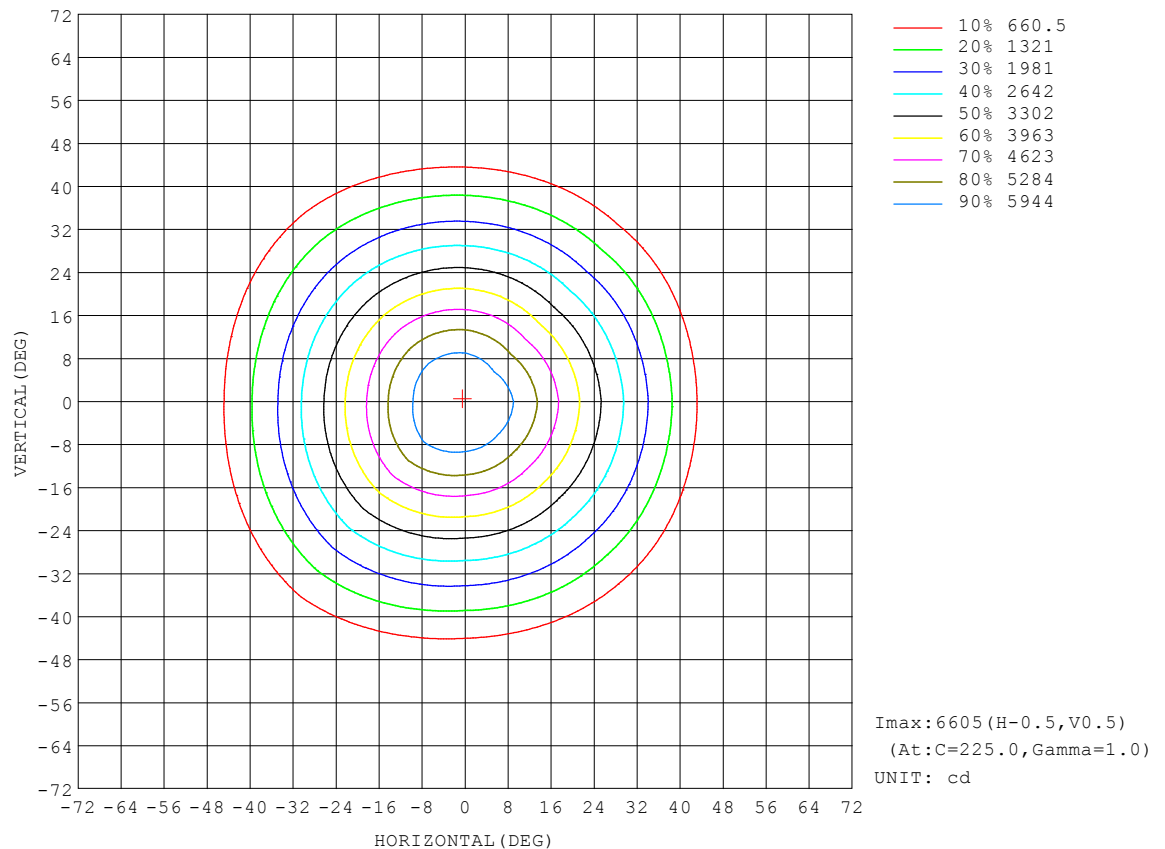


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

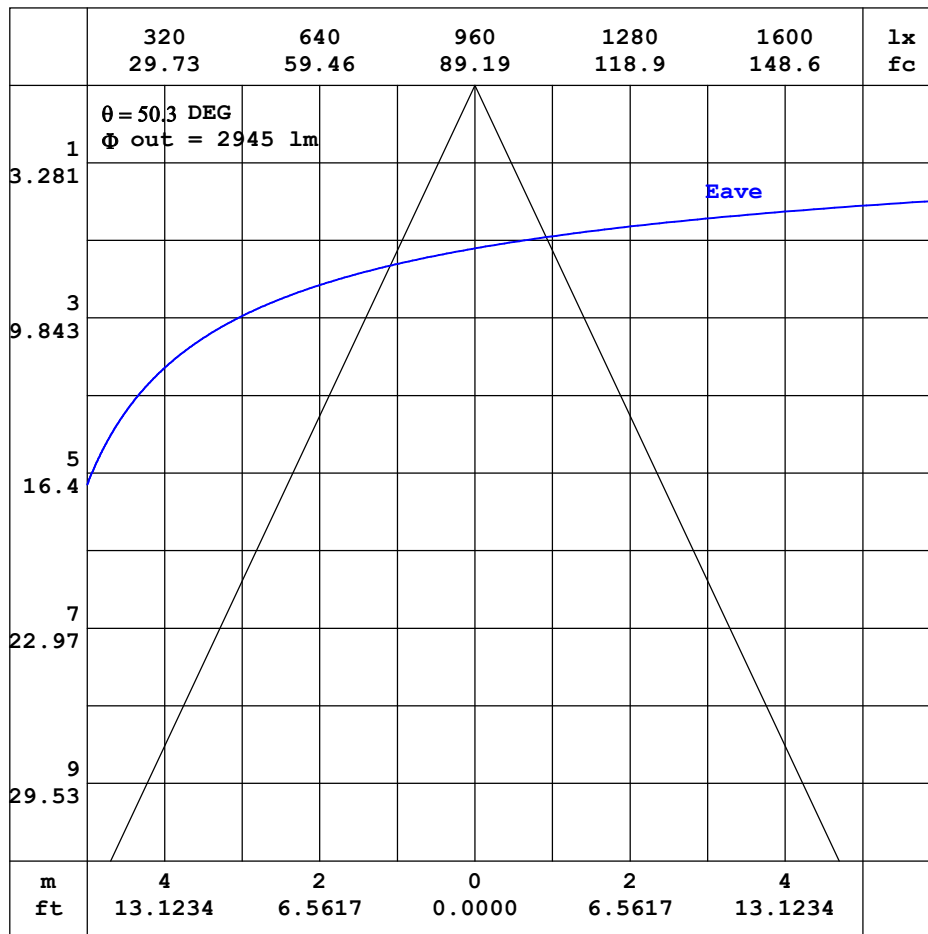


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

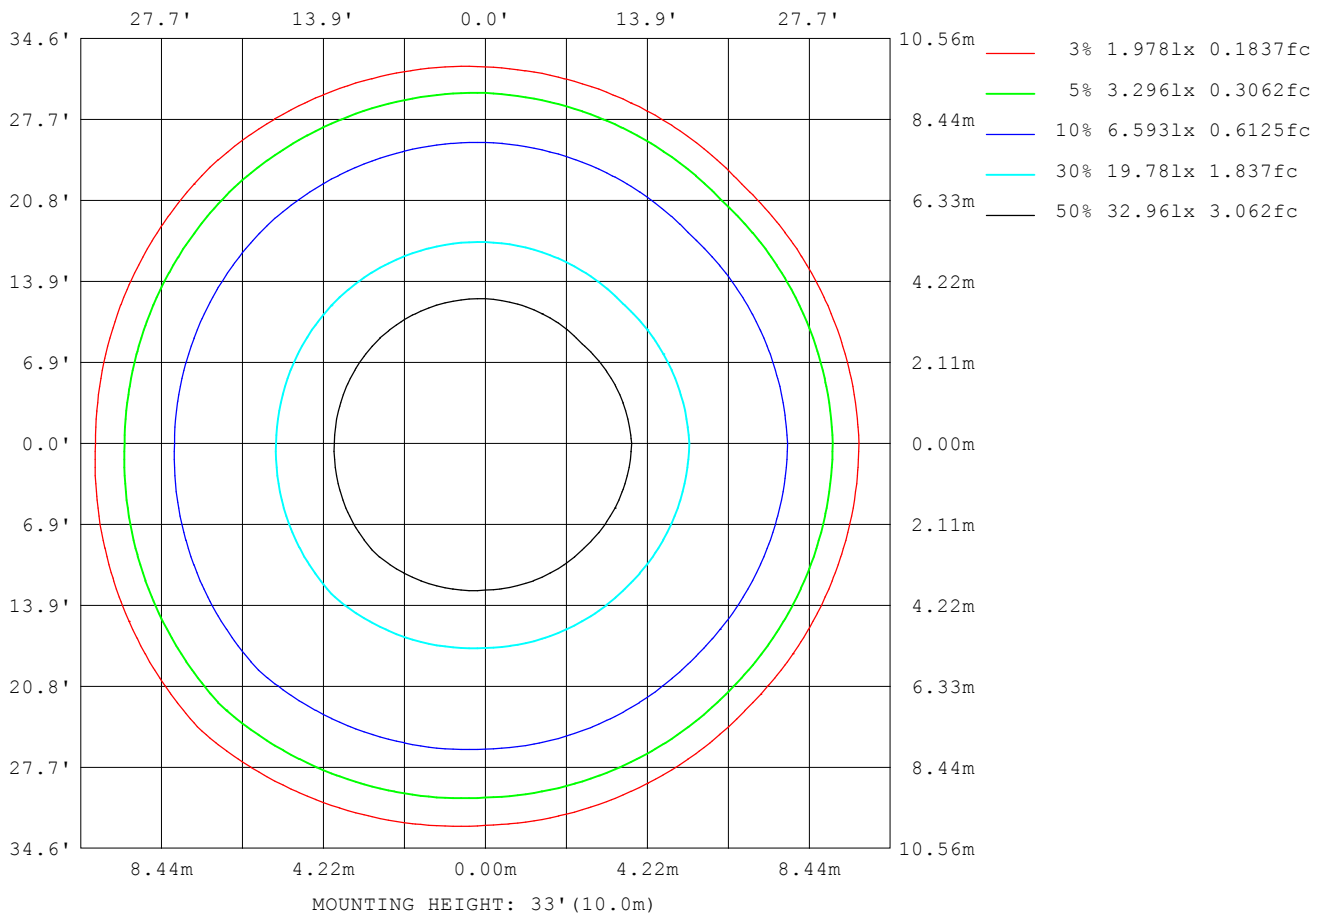

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm		
NAME: WL-2CLD6IN50WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	24
L_0~180 (75) av	4
L_0~180 (85) av	5
L_90~270 (65) av	11
L_90~270 (75) av	3
L_90~270 (85) av	5
L_45 (65) av	32
L_45 (75) av	3
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

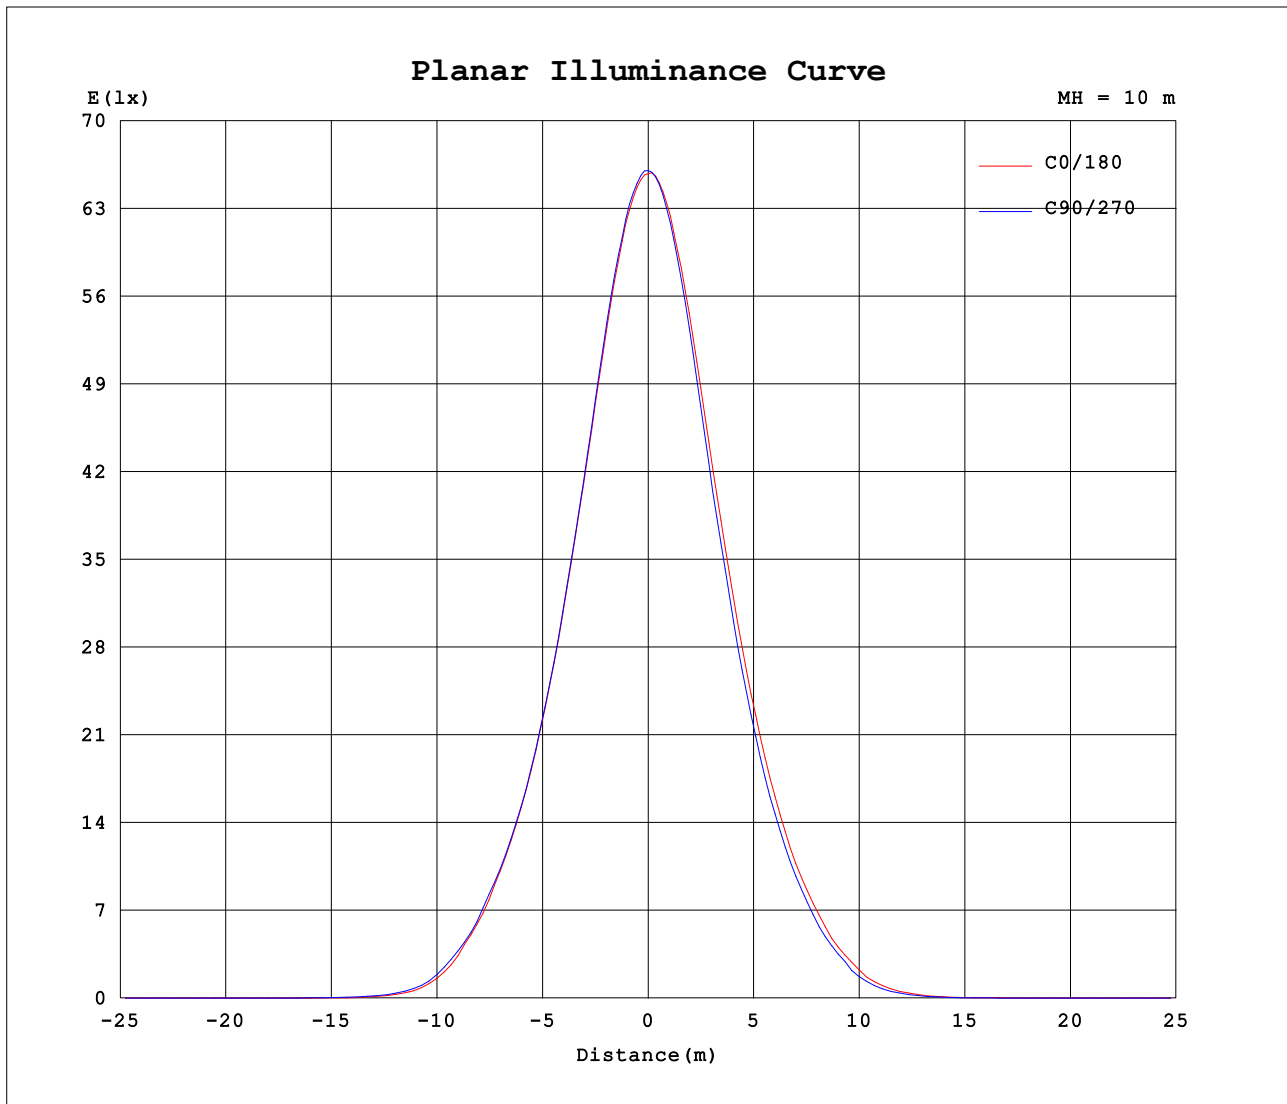

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.4020A P:48.00W PF:0.9930 Freq:60.00Hz Lamp Flux:5200.03x1 lm								
NAME: WL-2CLD6IN50WB5D3HVWH					TYPE:5000K			WEIGHT:
SPEC.:					DIM.: 6IN			SERIAL No.:
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	6579	6602	6603	6584	6579	6602	6603	6584										
5	6365	6357	6413	6488	6421	6444	6378	6260										
10	5807	5765	5853	6038	5902	5910	5807	5635										
15	5023	4961	5057	5322	5172	5131	4998	4800										
20	4182	4110	4206	4491	4340	4266	4131	3941										
25	3354	3287	3372	3663	3509	3423	3278	3121										
30	2567	2517	2578	2881	2710	2620	2481	2351										
35	1852	1804	1883	2137	1956	1896	1774	1656										
40	1130	1085	1167	1453	1267	1222	1093	978										
45	452	440	541	795	640	629	485	367										
50	116	136	160	268	208	200	155	91.7										
55	26.9	29.8	40.9	71.4	53.1	56.6	38.0	22.9										
60	7.86	8.47	11.4	20.0	15.7	16.0	11.2	5.61										
65	0.19	0.19	0.72	4.53	2.59	2.39	0.49	0.17										
70	0.15	0.15	0.17	0.18	0.16	0.16	0.14	0.13										
75	0.12	0.12	0.12	0.14	0.14	0.12	0.11	0.10										
80	0.08	0.08	0.10	0.10	0.10	0.09	0.07	0.07										
85	0.05	0.04	0.06	0.07	0.07	0.06	0.05	0.03										
90	0.03	0.03	0.03	0.04	0.03	0.02	0.02	0.02										
95	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02										
100	0.03	0.02	0.03	0.02	0.03	0.01	0.02	0.02										
105	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.03										
110	0.06	0.05	0.05	0.03	0.04	0.03	0.04	0.06										
115	0.12	0.11	0.09	0.07	0.08	0.09	0.10	0.15										
120	0.24	0.22	0.21	0.17	0.22	0.21	0.23	0.30										
125	0.44	0.42	0.38	0.33	0.42	0.41	0.45	0.55										
130	0.73	0.71	0.66	0.59	0.72	0.71	0.76	0.90										
135	1.11	1.06	1.02	0.93	1.11	1.07	1.17	1.32										
140	1.55	1.50	1.46	1.35	1.57	1.53	1.65	1.81										
145	2.05	2.03	2.00	1.84	2.08	2.04	2.21	2.37										
150	2.60	2.59	2.58	2.40	2.65	2.63	2.80	2.96										
155	3.21	3.21	3.20	3.01	3.27	3.24	3.42	3.57										
160	3.79	3.80	3.77	3.63	3.86	3.88	4.01	4.15										
165	4.31	4.32	4.31	4.19	4.41	4.45	4.54	4.66										
170	4.74	4.73	4.78	4.64	4.84	4.86	4.94	5.02										
175	5.03	5.00	5.08	5.03	5.13	5.14	5.21	5.22										
180	5.17	5.08	5.27	5.27	5.26	5.15	5.19	5.24										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: