


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 91.95 lm/W
MODEL		I _{max} (cd)	6203	S/MH(C0/180)		0.76
NOMINAL POWER(W)	55W	LOR(%)	100.0	S/MH(C90/270)		0.76
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4864.0	η UP,DN(C0-180)		0.1,50.7
NOMINAL FLUX(lm)	4864.03	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.1,49.2
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM		0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX		0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

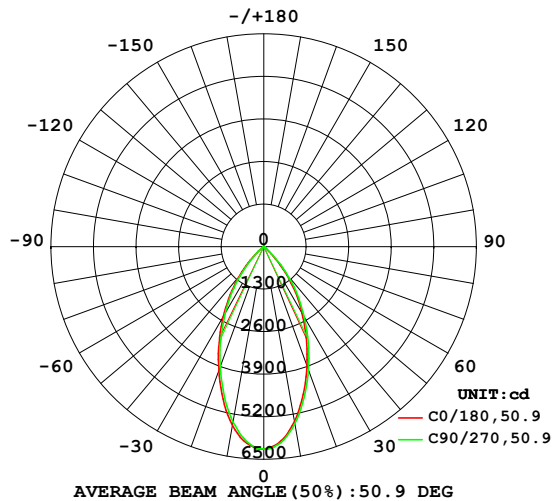

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

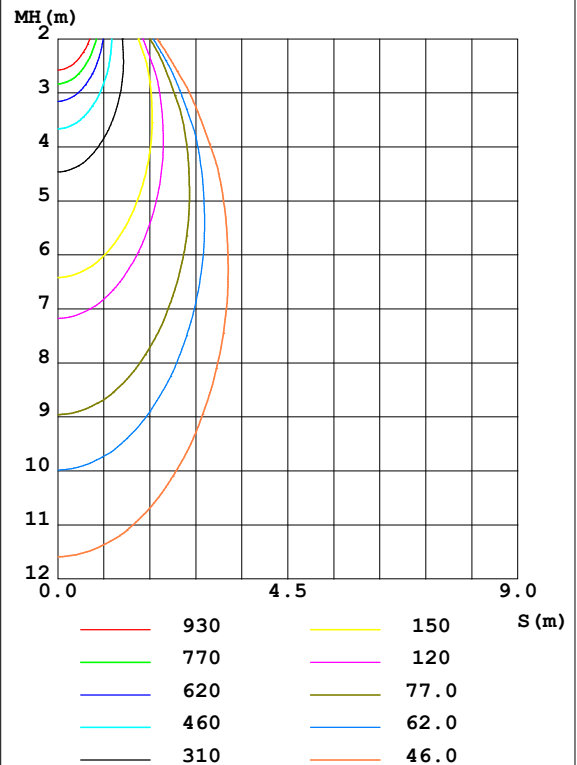

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5420	5410	5494	5667	5546	5552	5443	5243	0- 10	555.1	555.1	11.4, 11.4
20	3867	3876	3998	4211	4023	4034	3899	3645	10- 20	1317	1872	38.5, 38.5
30	2338	2371	2466	2677	2490	2486	2373	2158	20- 30	1444	3316	68.2, 68.2
40	1026	1026	1116	1345	1154	1152	1048	892.0	30- 40	1080	4396	90.4, 90.4
50	105.9	115.4	151.1	240.3	186.7	189.5	148.8	84.18	40- 50	412.6	4809	98.9, 98.9
60	7.215	7.780	10.49	18.37	14.44	14.70	10.41	5.137	50- 60	46.72	4855	99.8, 99.8
70	0.1356	0.1331	0.1478	0.1598	0.1549	0.1405	0.1234	0.1163	60- 70	2.802	4858	99.9, 99.9
80	0.0799	0.0677	0.0800	0.0944	0.0847	0.0776	0.0702	0.0533	70- 80	0.1110	4858	99.9, 99.9
90	0.0291	0.0170	0.0218	0.0290	0.0241	0.0170	0.0194	0.0145	80- 90	0.0515	4858	99.9, 99.9
100	0.0266	0.0194	0.0194	0.0121	0.0169	0.0169	0.0098	0.0121	90-100	0.0196	4858	99.9, 99.9
110	0.0581	0.0510	0.0484	0.0364	0.0315	0.0266	0.0364	0.0460	100-110	0.0255	4858	99.9, 99.9
120	0.2612	0.2667	0.2298	0.1818	0.1675	0.1790	0.2159	0.2709	110-120	0.1084	4858	99.9, 99.9
130	0.7935	0.7878	0.7354	0.6449	0.5965	0.6364	0.7056	0.8034	120-130	0.3906	4859	99.9, 99.9
140	1.636	1.626	1.566	1.418	1.348	1.413	1.532	1.636	130-140	0.8374	4860	99.9, 99.9
150	2.702	2.718	2.668	2.483	2.363	2.460	2.627	2.712	140-150	1.268	4861	99.9, 99.9
160	3.823	3.864	3.835	3.643	3.552	3.649	3.840	3.886	150-160	1.456	4862	100, 100
170	4.702	4.687	4.710	4.575	4.568	4.519	4.755	4.741	160-170	1.190	4864	100, 100
180	5.001	4.960	5.049	5.100	4.955	4.933	5.132	4.989	170-180	0.4613	4864	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

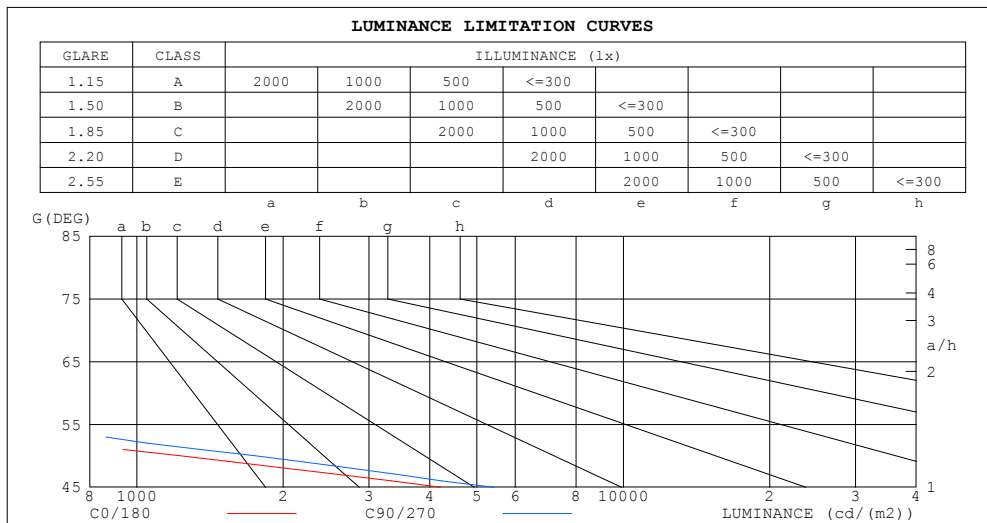

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4	5
80	3	3
75	3	3
70	3	3
65	3	11
60	107	155
55	325	475
50	1221	1741
45	4215	5428


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.79	.73	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.70	.67	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
9.0	.66	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54
10.0	.62	.56	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50

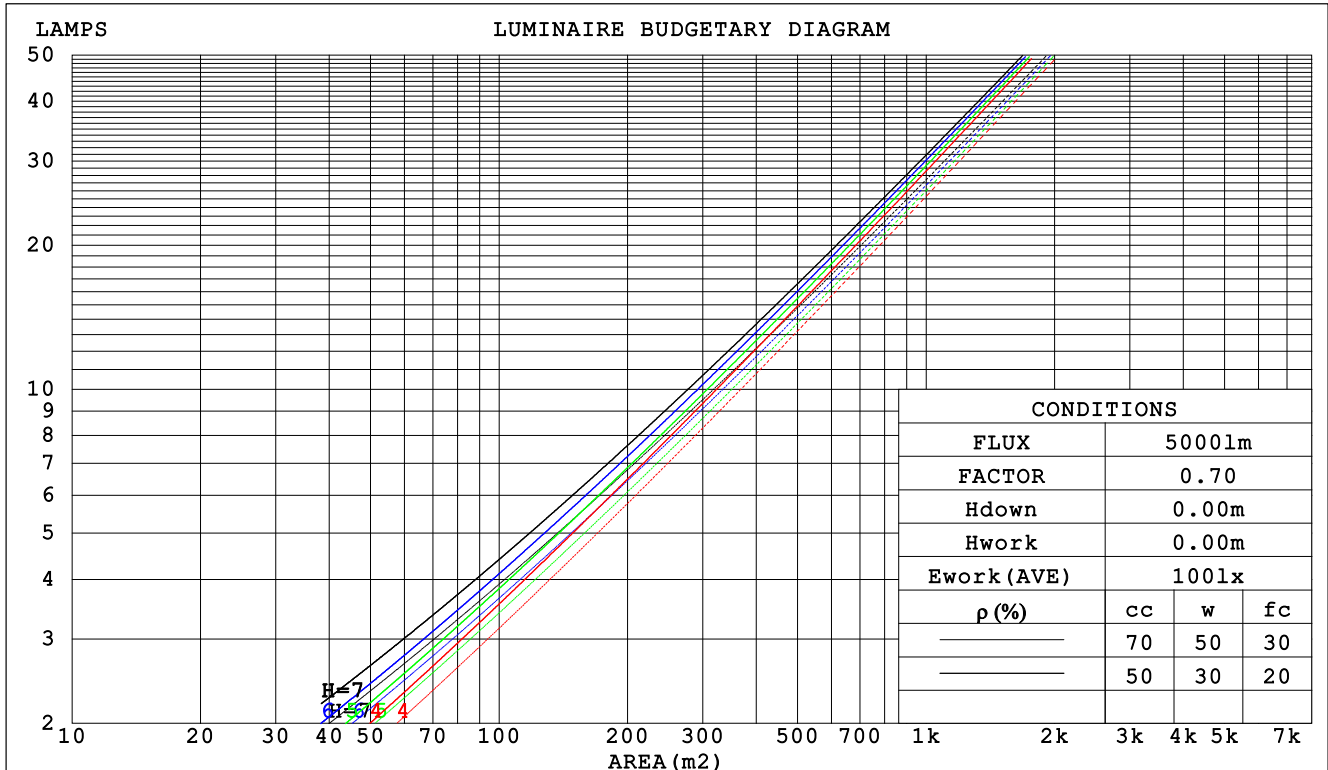

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm					
NAME: WL-2CLD6IN55WB5D3HVWH			TYPE:2700K		WEIGHT:
SPEC.:			DIM.: 6IN		SERIAL No.:
MFR.: WS			SUR.:0.043*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.171	.094	.029	.165	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.133	.074	.023		
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.073	.022	.130	.071	.022		
5.0	.149	.076	.022	.146	.075	.022	.139	.072	.021	.132	.070	.021	.126	.067	.020		
6.0	.143	.071	.020	.139	.070	.020	.133	.068	.020	.128	.066	.019	.122	.064	.019		
7.0	.136	.067	.019	.133	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.125	.060	.017	.123	.060	.017	.118	.059	.017	.114	.057	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.135	.115	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.063	.080	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.109	.076	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.068	.044	.071	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.037	.067	.043	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.036	.022	.012	.011	.007	.004	
10.0	.098	.056	.028	.084	.049	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm										
NAME: WL-2CLD6IN55WB5D3HVWH					TYPE:2700K			WEIGHT:		
SPEC.:					DIM.: 6IN			SERIAL No.:		
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.5	14.4	13.7	14.6	14.8	13.9	14.9	14.1	15.0	15.2
3H	13.3	14.2	13.6	14.4	14.6	13.7	14.6	14.0	14.8	15.0
4H	13.2	14.1	13.5	14.3	14.5	13.6	14.5	13.9	14.7	14.9
6H	13.1	13.9	13.4	14.2	14.4	13.6	14.3	13.9	14.6	14.8
8H	13.1	13.8	13.4	14.1	14.4	13.5	14.3	13.8	14.5	14.8
12H	13.0	13.8	13.4	14.0	14.3	13.5	14.2	13.8	14.5	14.7
4H 2H	13.2	14.1	13.5	14.3	14.5	13.6	14.5	13.9	14.7	14.9
3H	13.0	13.8	13.4	14.0	14.3	13.5	14.2	13.8	14.5	14.7
4H	12.9	13.6	13.3	13.9	14.2	13.4	14.0	13.7	14.3	14.6
6H	12.9	13.4	13.2	13.8	14.1	13.3	13.8	13.7	14.2	14.5
8H	12.8	13.3	13.2	13.7	14.1	13.2	13.8	13.6	14.1	14.5
12H	12.8	13.2	13.2	13.6	14.0	13.2	13.7	13.6	14.0	14.4
8H 4H	12.8	13.3	13.2	13.7	14.1	13.2	13.8	13.6	14.1	14.5
6H	12.7	13.1	13.1	13.5	13.9	13.1	13.6	13.6	13.9	14.4
8H	12.6	13.0	13.1	13.4	13.9	13.1	13.4	13.5	13.9	14.3
12H	12.6	12.9	13.1	13.4	13.8	13.0	13.3	13.5	13.8	14.3
12H 4H	12.8	13.2	13.2	13.6	14.0	13.2	13.7	13.6	14.0	14.4
6H	12.6	13.0	13.1	13.4	13.9	13.1	13.4	13.5	13.9	14.3
8H	12.6	12.9	13.1	13.4	13.8	13.0	13.3	13.5	13.8	14.3
Variations with the observer position at spacings:										
S = 1.0H	+ 2.9 / -21.2					+ 3.2 / -19.8				
1.5H	+ 5.2 / -16.6					+ 5.3 / -16.4				
2.0H	+ 7.8 / -31.8					+ 8.3 / -27.3				

CIE Pub.117 Corrected 4864 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	101	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

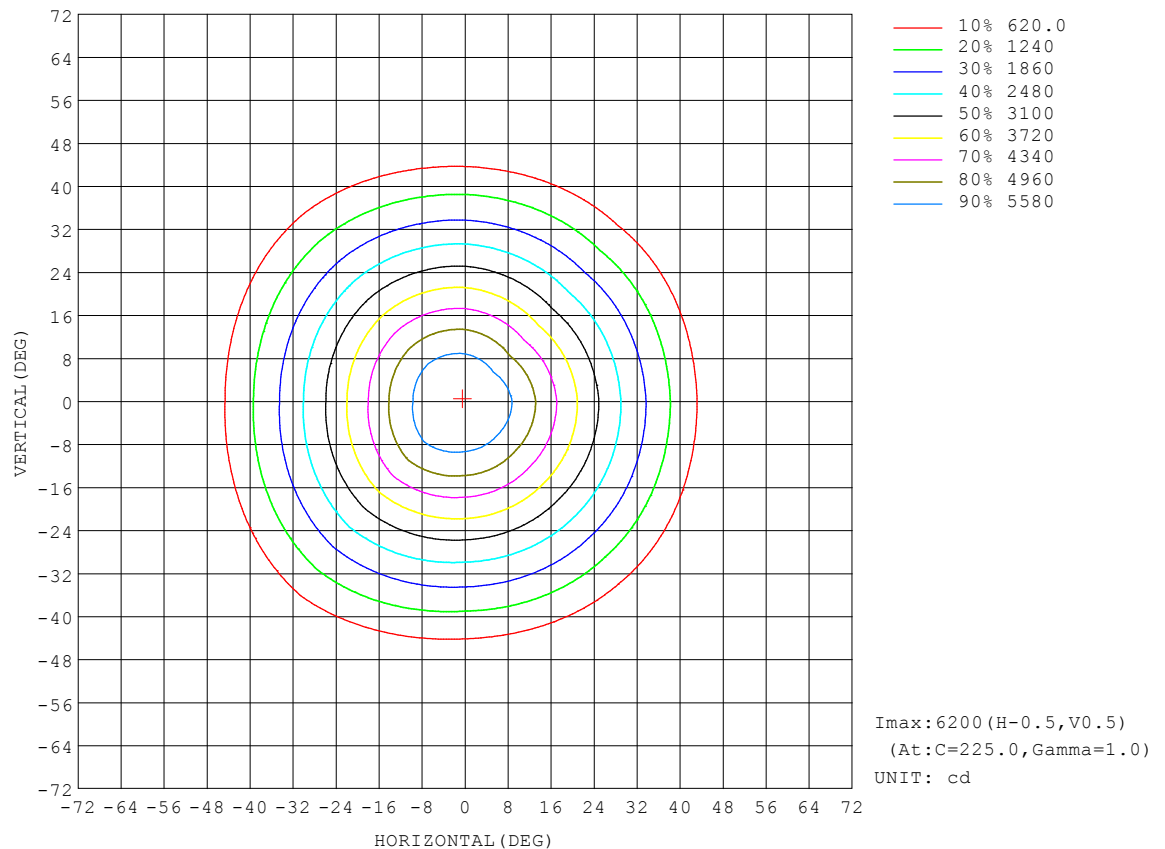


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

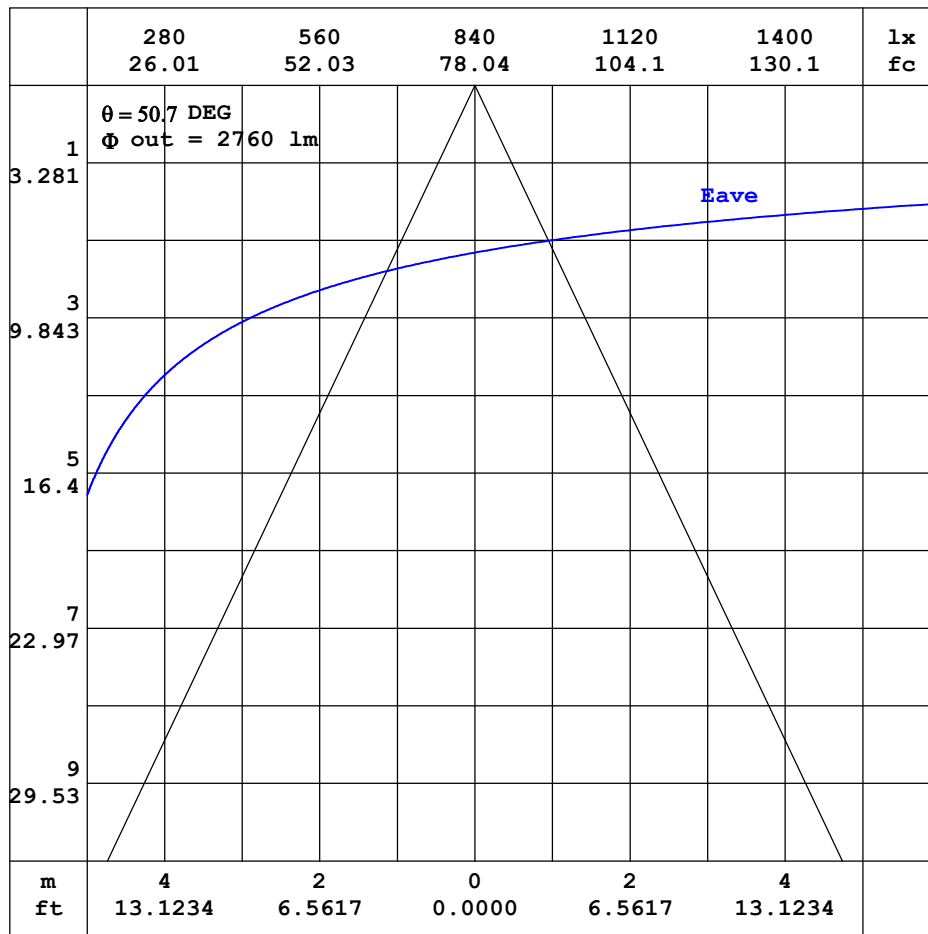


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

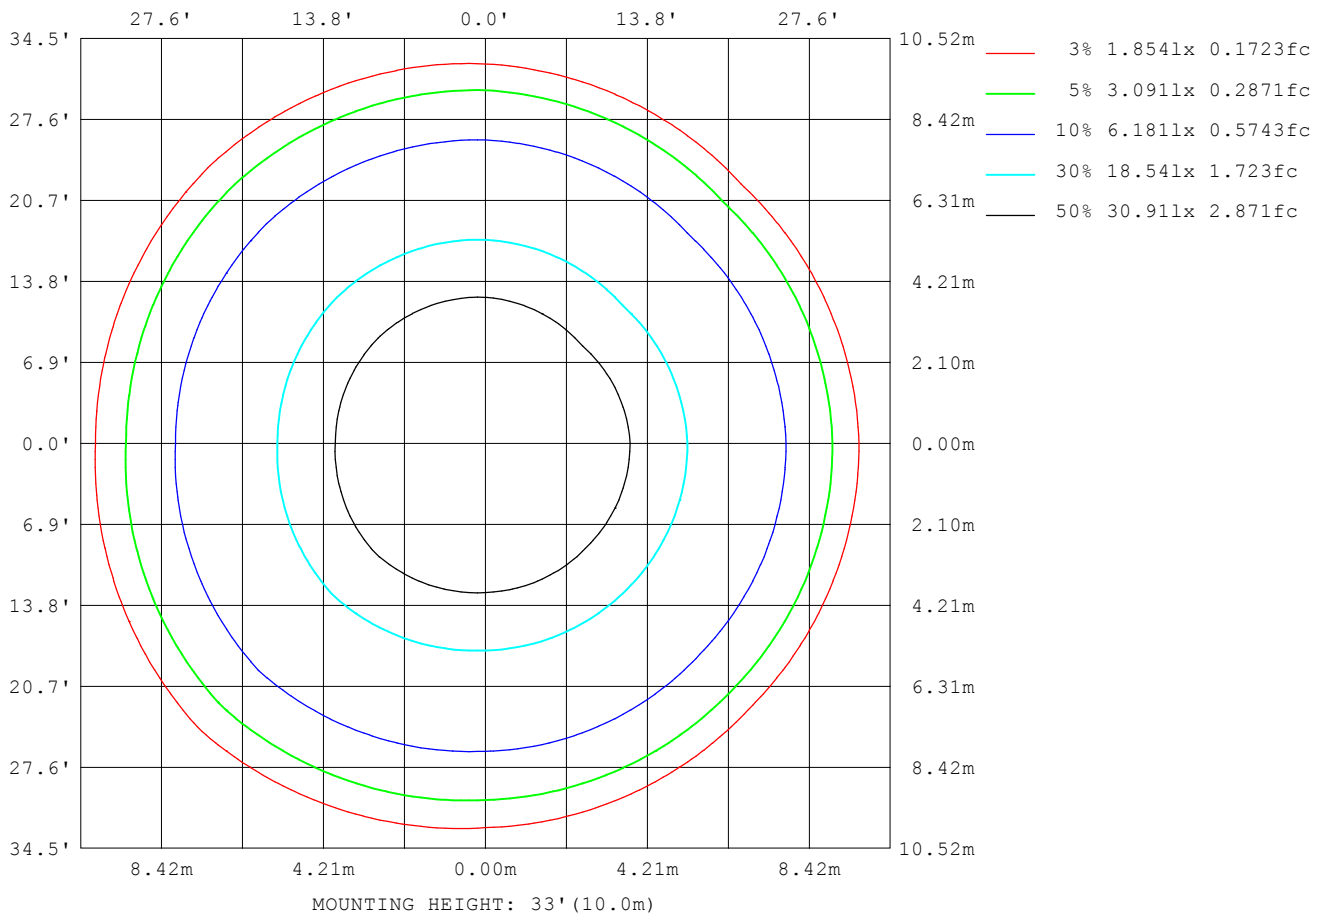

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	22
L_0~180 (75) av	3
L_0~180 (85) av	4
L_90~270 (65) av	10
L_90~270 (75) av	3
L_90~270 (85) av	4
L_45 (65) av	30
L_45 (75) av	3
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

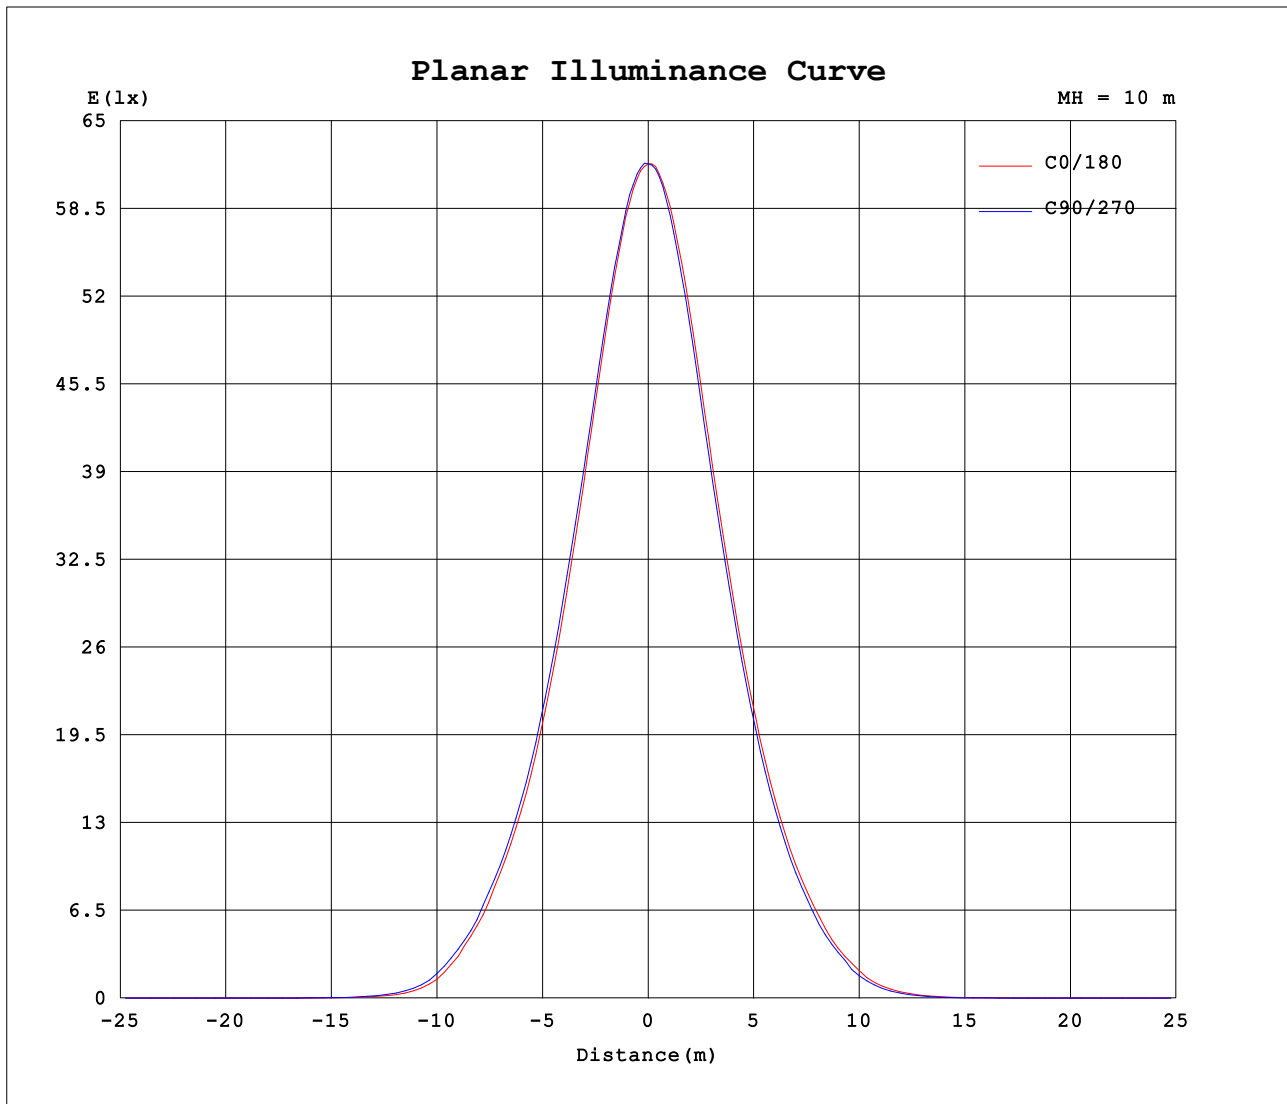

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:4864.03x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:2700K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	6181	6192	6182	6159	6181	6192	6182	6159										
5	5963	5955	6021	6095	6027	6050	5976	5855										
10	5420	5410	5494	5667	5546	5552	5443	5243										
15	4677	4661	4774	4987	4823	4833	4699	4460										
20	3867	3876	3998	4211	4023	4034	3899	3645										
25	3081	3100	3216	3423	3236	3239	3117	2865										
30	2338	2371	2466	2677	2490	2486	2373	2158										
35	1695	1701	1795	1982	1795	1796	1689	1518										
40	1026	1026	1116	1345	1154	1152	1048	892										
45	402	422	518	728	582	590	471	327										
50	106	115	151	240	187	189	149	84.2										
55	25.2	27.1	36.8	65.3	49.2	54.3	34.5	21.0										
60	7.22	7.78	10.5	18.4	14.4	14.7	10.4	5.14										
65	0.17	0.17	0.63	4.18	2.38	2.26	0.49	0.15										
70	0.14	0.13	0.15	0.16	0.15	0.14	0.12	0.12										
75	0.10	0.10	0.12	0.12	0.11	0.11	0.08	0.09										
80	0.08	0.07	0.08	0.09	0.08	0.08	0.07	0.05										
85	0.04	0.04	0.06	0.06	0.06	0.05	0.04	0.04										
90	0.03	0.02	0.02	0.03	0.02	0.02	0.02	0.01										
95	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.02										
100	0.03	0.02	0.02	0.01	0.02	0.02	0.01	0.01										
105	0.03	0.02	0.03	0.02	0.01	0.01	0.02	0.02										
110	0.06	0.05	0.05	0.04	0.03	0.03	0.04	0.05										
115	0.12	0.13	0.11	0.07	0.07	0.08	0.10	0.12										
120	0.26	0.27	0.23	0.18	0.17	0.18	0.22	0.27										
125	0.48	0.49	0.45	0.37	0.35	0.37	0.42	0.49										
130	0.79	0.79	0.74	0.64	0.60	0.64	0.71	0.80										
135	1.17	1.17	1.13	1.00	0.94	0.99	1.08	1.18										
140	1.64	1.63	1.57	1.42	1.35	1.41	1.53	1.64										
145	2.16	2.16	2.10	1.92	1.83	1.89	2.07	2.14										
150	2.70	2.72	2.67	2.48	2.36	2.46	2.63	2.71										
155	3.27	3.31	3.26	3.07	2.95	3.06	3.24	3.32										
160	3.82	3.86	3.83	3.64	3.55	3.65	3.84	3.89										
165	4.32	4.33	4.33	4.15	4.12	4.14	4.36	4.37										
170	4.70	4.69	4.71	4.58	4.57	4.52	4.75	4.74										
175	4.96	4.90	5.00	4.88	4.87	4.77	5.03	4.97										
180	5.00	4.96	5.05	5.10	4.95	4.93	5.13	4.99										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: