


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.63 lm/W
MODEL		I _{max} (cd)	6642	S/MH(C0/180)	0.76	
NOMINAL POWER(W)	55W	LOR(%)	100.0	S/MH(C90/270)	0.76	
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	5217.4	η UP,DN(C0-180)	0.1,50.5	
NOMINAL FLUX(lm)	5217.39	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.3	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

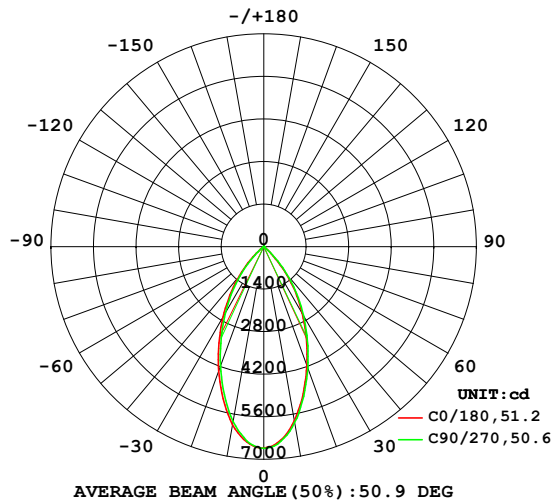

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

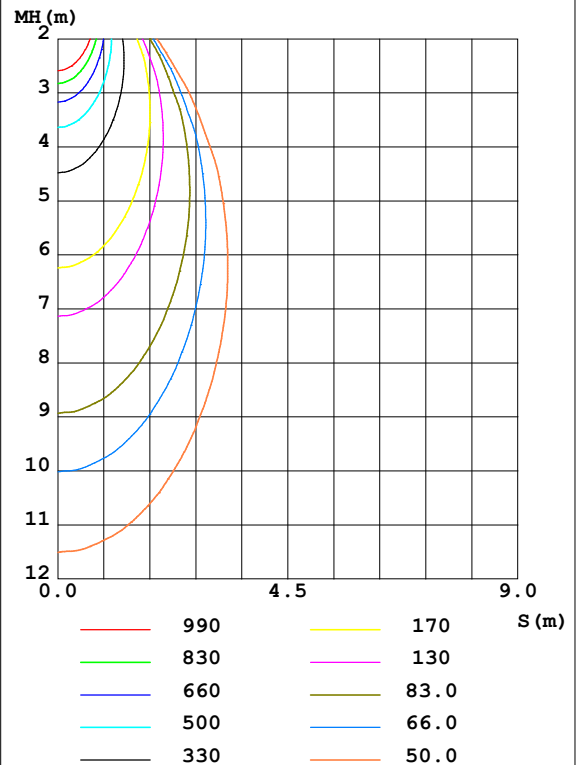

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5819	5788	5877	6076	5943	5943	5843	5642	0- 10	595.2	595.2	11.4,11.4
20	4159	4149	4250	4508	4346	4310	4170	3936	10- 20	1412	2007	38.5,38.5
30	2535	2539	2613	2873	2702	2649	2531	2340	20- 30	1549	3556	68.2,68.2
40	1101	1094	1178	1451	1260	1233	1114	968.1	30- 40	1158	4714	90.4,90.4
50	113.0	135.9	159.3	263.6	206.0	202.2	159.5	91.25	40- 50	443.2	5157	98.8,98.8
60	7.667	8.461	11.17	19.70	15.74	15.91	11.34	5.577	50- 60	50.54	5208	99.8,99.8
70	0.1381	0.1428	0.1647	0.1864	0.1694	0.1623	0.1380	0.1308	60- 70	3.030	5211	99.9,99.9
80	0.0752	0.0726	0.0946	0.1041	0.1040	0.0896	0.0678	0.0679	70- 80	0.1243	5211	99.9,99.9
90	0.0315	0.0290	0.0339	0.0411	0.0218	0.0267	0.0122	0.0194	80- 90	0.0572	5211	99.9,99.9
100	0.0266	0.0266	0.0266	0.0194	0.0145	0.0170	0.0146	0.0194	90-100	0.0242	5211	99.9,99.9
110	0.0629	0.0631	0.0508	0.0412	0.0363	0.0387	0.0412	0.0604	100-110	0.0310	5211	99.9,99.9
120	0.3289	0.3297	0.2853	0.2328	0.1989	0.2007	0.2232	0.3024	110-120	0.1268	5211	99.9,99.9
130	0.9484	0.9501	0.8709	0.7830	0.6838	0.6871	0.7516	0.8832	120-130	0.4547	5212	99.9,99.9
140	1.921	1.914	1.832	1.684	1.512	1.527	1.621	1.781	130-140	0.9553	5212	99.9,99.9
150	3.099	3.154	3.055	2.888	2.593	2.634	2.779	2.961	140-150	1.424	5214	99.9,99.9
160	4.365	4.421	4.365	4.215	3.893	3.944	4.111	4.276	150-160	1.626	5216	100,100
170	5.235	5.251	5.276	5.193	4.995	4.964	5.140	5.252	160-170	1.325	5217	100,100
180	5.522	5.507	5.575	5.568	5.510	5.490	5.609	5.597	170-180	0.5115	5217	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

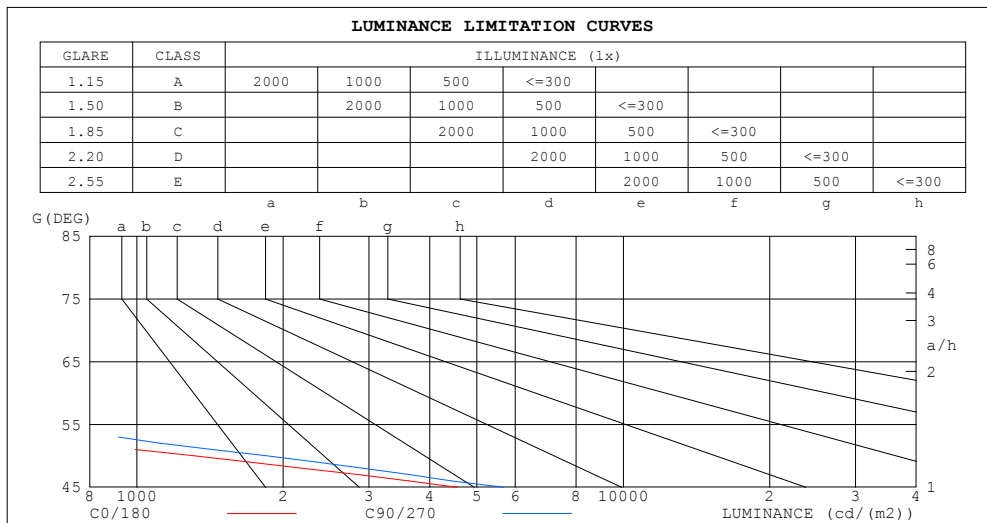

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4	5
80	3	4
75	3	4
70	3	4
65	3	12
60	114	165
55	340	509
50	1302	1836
45	4557	5687


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.79	.72	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.70	.67	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
9.0	.66	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54
10.0	.62	.56	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50

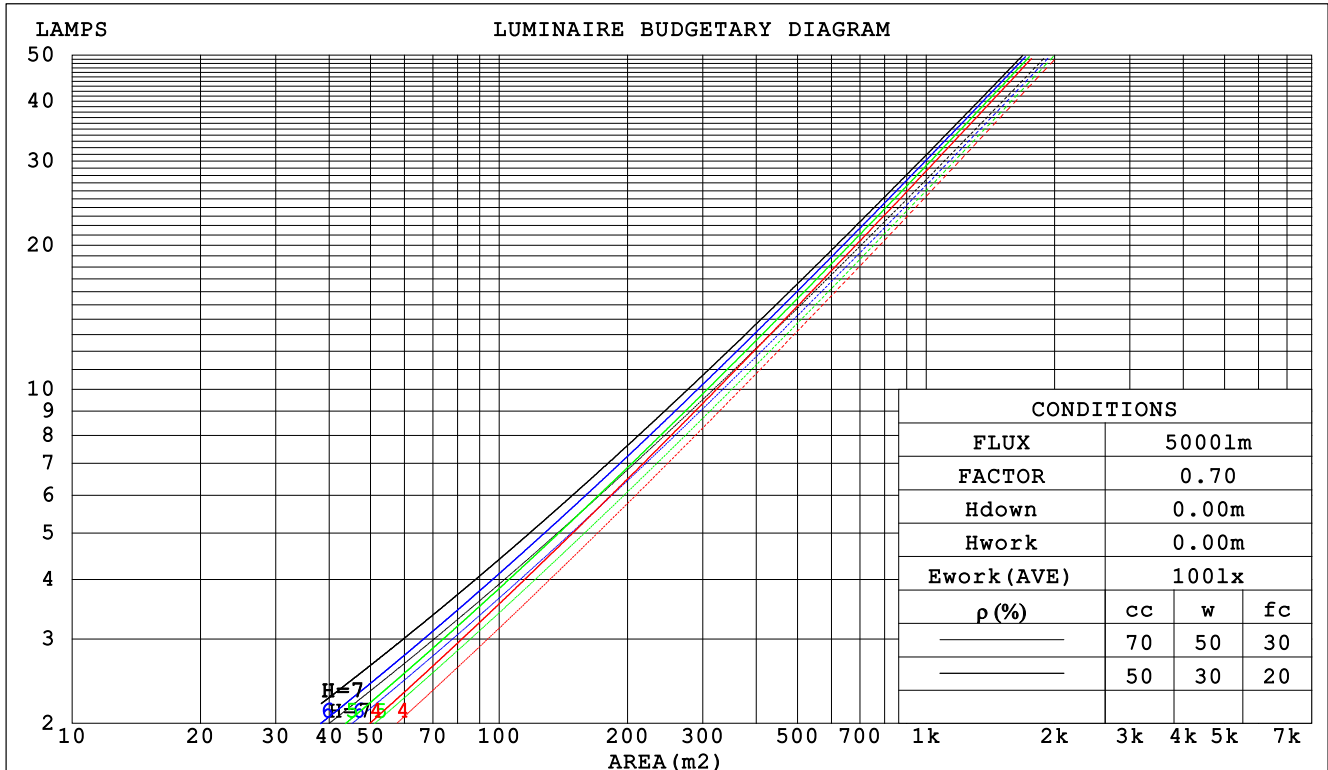

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.171	.094	.029	.166	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.133	.074	.023		
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.073	.022	.130	.071	.022		
5.0	.149	.076	.022	.146	.075	.022	.139	.072	.021	.132	.070	.021	.126	.067	.020		
6.0	.143	.071	.020	.139	.070	.020	.133	.068	.020	.128	.066	.019	.122	.064	.019		
7.0	.136	.067	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.125	.061	.017	.123	.060	.017	.119	.059	.017	.114	.057	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.135	.115	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.080	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.109	.076	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.068	.044	.071	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.037	.067	.044	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.036	.022	.012	.012	.007	.004	
10.0	.098	.056	.028	.084	.049	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm										
NAME: WL-2CLD6IN55WB5D3HVWH					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.: 6IN			SERIAL No.:		
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.7	14.7	13.9	14.8	15.0	14.1	15.0	14.3	15.2	15.4
3H	13.5	14.4	13.8	14.6	14.8	13.9	14.8	14.2	15.0	15.2
4H	13.4	14.3	13.7	14.5	14.7	13.8	14.6	14.1	14.9	15.1
6H	13.4	14.1	13.7	14.4	14.6	13.7	14.5	14.0	14.7	15.0
8H	13.3	14.1	13.6	14.3	14.6	13.7	14.4	14.0	14.7	14.9
12H	13.3	14.0	13.6	14.2	14.5	13.6	14.3	14.0	14.6	14.9
4H 2H	13.4	14.3	13.7	14.5	14.7	13.8	14.6	14.1	14.9	15.1
3H	13.3	14.0	13.6	14.3	14.5	13.6	14.4	14.0	14.6	14.9
4H	13.2	13.8	13.5	14.1	14.4	13.5	14.2	13.9	14.5	14.8
6H	13.1	13.6	13.5	14.0	14.3	13.4	14.0	13.8	14.3	14.7
8H	13.0	13.5	13.4	13.9	14.3	13.4	13.9	13.8	14.3	14.6
12H	13.0	13.5	13.4	13.8	14.2	13.3	13.8	13.8	14.2	14.6
8H 4H	13.0	13.5	13.4	13.9	14.3	13.4	13.9	13.8	14.3	14.6
6H	12.9	13.4	13.4	13.7	14.2	13.3	13.7	13.7	14.1	14.5
8H	12.9	13.2	13.3	13.7	14.1	13.2	13.6	13.7	14.0	14.5
12H	12.8	13.1	13.3	13.6	14.1	13.2	13.5	13.7	14.0	14.4
12H 4H	13.0	13.5	13.4	13.8	14.2	13.3	13.8	13.8	14.2	14.6
6H	12.9	13.2	13.3	13.7	14.1	13.2	13.6	13.7	14.0	14.5
8H	12.8	13.1	13.3	13.6	14.1	13.2	13.5	13.7	14.0	14.4
Variations with the observer position at spacings:										
S = 1.0H	+ 2.9 / -21.3					+ 3.1 / -19.7				
1.5H	+ 5.2 / -16.5					+ 5.3 / -16.2				
2.0H	+ 7.9 / -32.0					+ 8.2 / -27.3				

CIE Pub.117 Corrected 5217 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

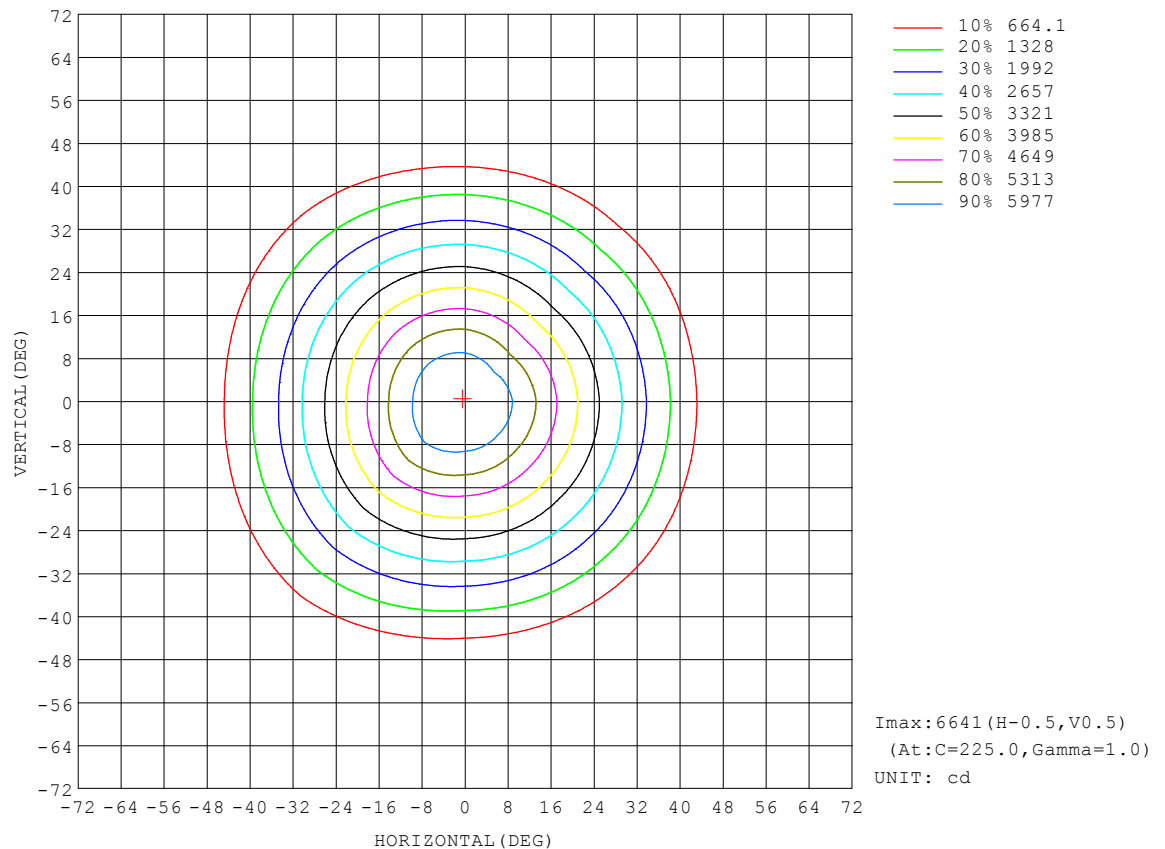


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

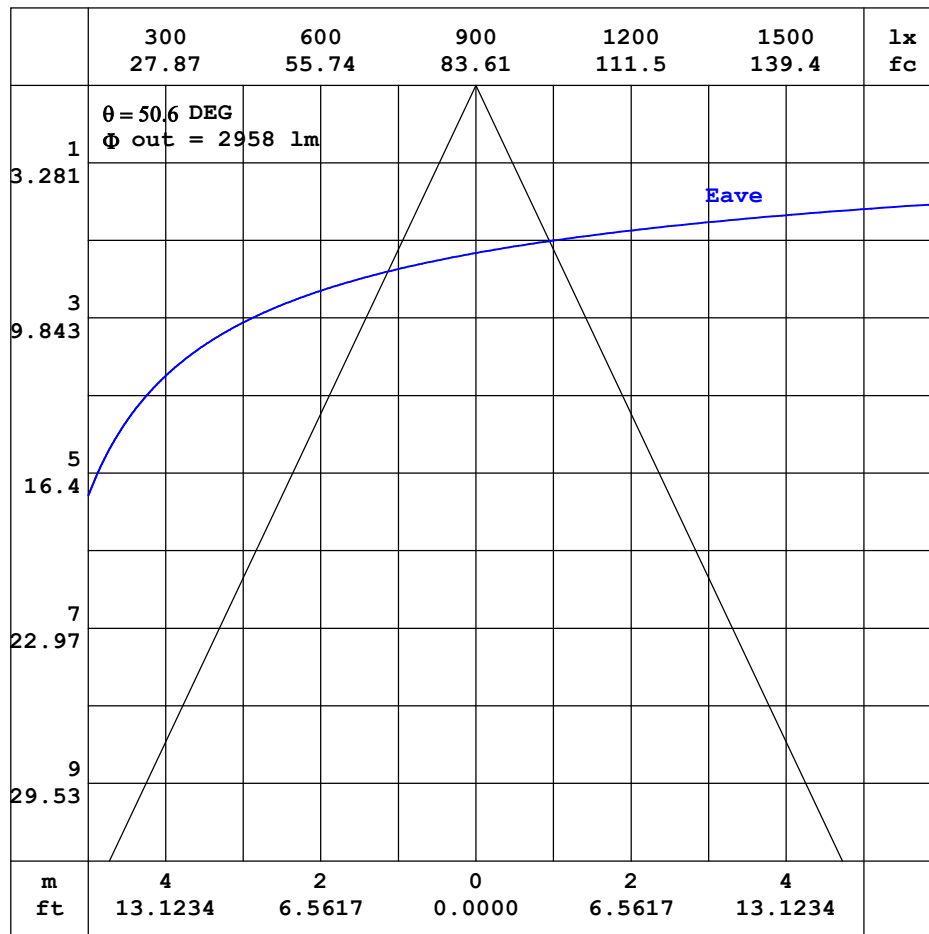


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

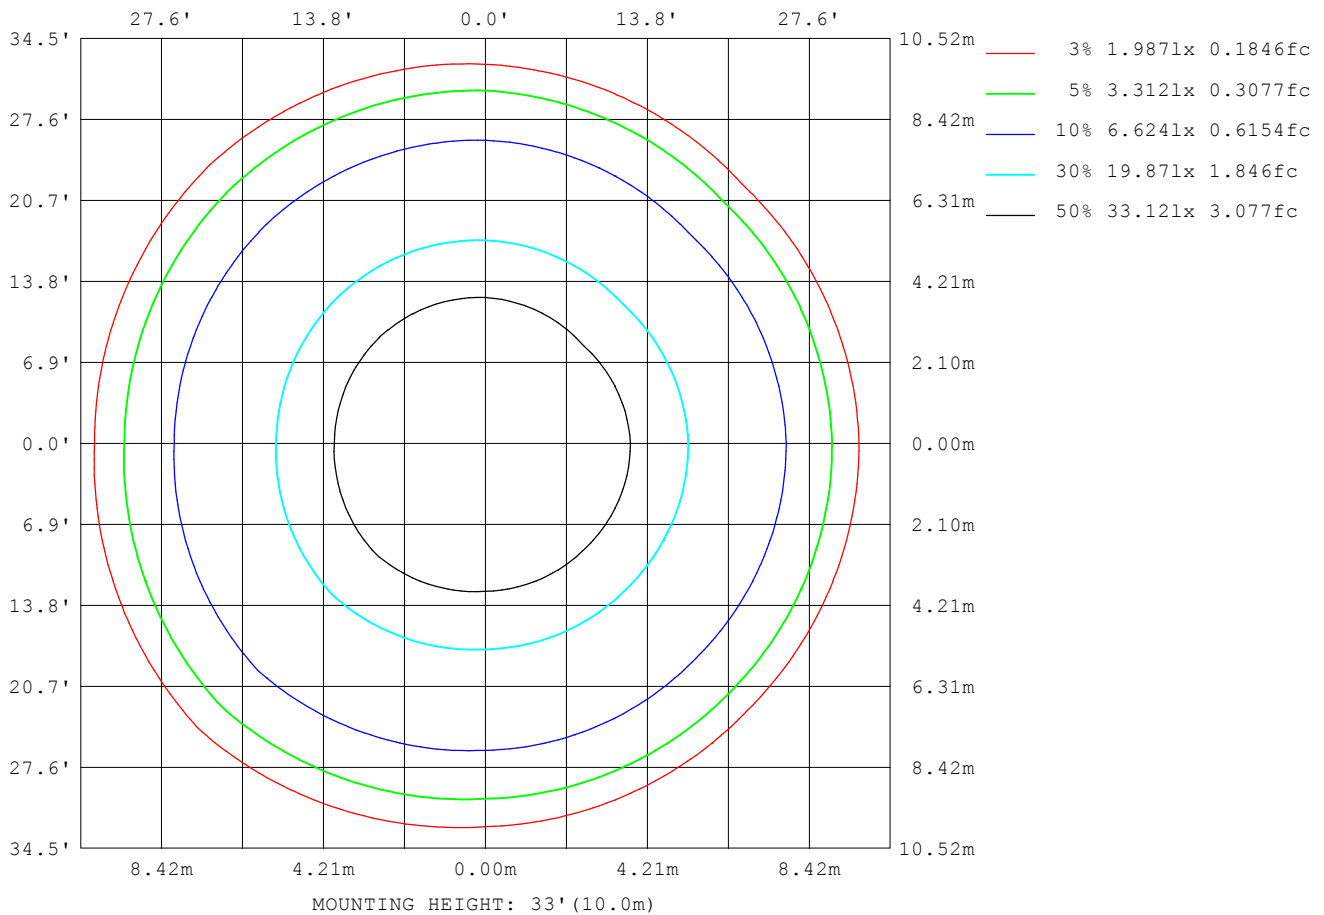

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	25
L_0~180 (75) av	3
L_0~180 (85) av	5
L_90~270 (65) av	11
L_90~270 (75) av	3
L_90~270 (85) av	4
L_45 (65) av	32
L_45 (75) av	3
L_45 (85) av	5

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

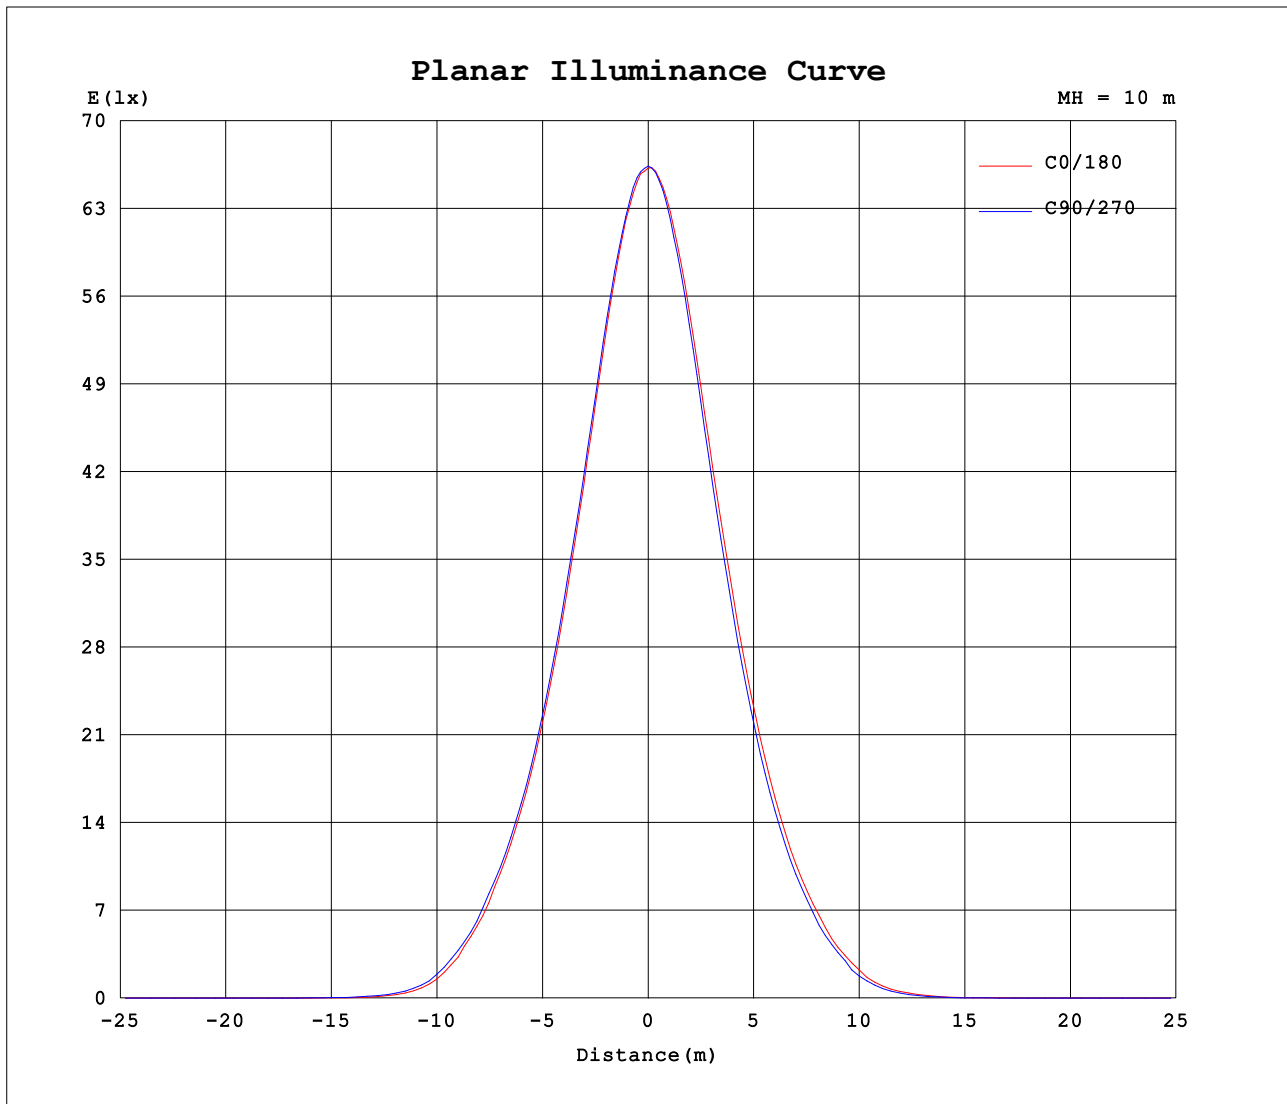

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.4430A P:52.90W PF:0.9930 Freq:60.00Hz Lamp Flux:5217.39x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	6624	6640	6639	6615	6624	6640	6639	6615										
5	6393	6393	6433	6527	6456	6477	6415	6290										
10	5819	5788	5877	6076	5943	5943	5843	5642										
15	5016	4991	5099	5344	5178	5170	5036	4802										
20	4159	4149	4250	4508	4346	4310	4170	3936										
25	3322	3318	3409	3663	3505	3457	3326	3111										
30	2535	2539	2613	2873	2702	2649	2531	2340										
35	1820	1818	1904	2127	1948	1915	1800	1649										
40	1101	1094	1178	1451	1260	1233	1114	968										
45	435	446	543	790	639	637	500	360										
50	113	136	159	264	206	202	159	91.3										
55	26.4	29.4	39.4	70.5	53.7	58.7	38.0	22.8										
60	7.67	8.46	11.2	19.7	15.7	15.9	11.3	5.58										
65	0.19	0.19	0.67	4.46	2.64	2.43	0.55	0.17										
70	0.14	0.14	0.16	0.19	0.17	0.16	0.14	0.13										
75	0.11	0.11	0.13	0.15	0.13	0.12	0.10	0.10										
80	0.08	0.07	0.09	0.10	0.10	0.09	0.07	0.07										
85	0.05	0.05	0.06	0.07	0.06	0.07	0.05	0.03										
90	0.03	0.03	0.03	0.04	0.02	0.03	0.01	0.02										
95	0.03	0.02	0.02	0.03	0.02	0.02	0.01	0.02										
100	0.03	0.03	0.03	0.02	0.01	0.02	0.01	0.02										
105	0.04	0.03	0.03	0.03	0.02	0.02	0.03	0.03										
110	0.06	0.06	0.05	0.04	0.04	0.04	0.04	0.06										
115	0.14	0.14	0.12	0.09	0.08	0.09	0.10	0.14										
120	0.33	0.33	0.29	0.23	0.20	0.20	0.22	0.30										
125	0.60	0.59	0.54	0.47	0.40	0.40	0.44	0.54										
130	0.95	0.95	0.87	0.78	0.68	0.69	0.75	0.88										
135	1.40	1.39	1.31	1.20	1.06	1.07	1.15	1.30										
140	1.92	1.91	1.83	1.68	1.51	1.53	1.62	1.78										
145	2.48	2.51	2.42	2.27	2.02	2.05	2.17	2.34										
150	3.10	3.15	3.06	2.89	2.59	2.63	2.78	2.96										
155	3.75	3.82	3.74	3.56	3.24	3.29	3.45	3.63										
160	4.37	4.42	4.37	4.21	3.89	3.94	4.11	4.28										
165	4.87	4.91	4.89	4.77	4.50	4.52	4.69	4.84										
170	5.24	5.25	5.28	5.19	4.99	4.96	5.14	5.25										
175	5.49	5.46	5.52	5.48	5.36	5.33	5.49	5.54										
180	5.52	5.51	5.57	5.57	5.51	5.49	5.61	5.60										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: