


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.60 lm/W			
MODEL		I _{max} (cd)	6968	S/MH(C0/180)	0.76
NOMINAL POWER(W)	55W	LOR(%)	100.0	S/MH(C90/270)	0.76
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	5480.2	η UP,DN(C0-180)	0.1,50.6
NOMINAL FLUX(lm)	5480.18	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.3
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

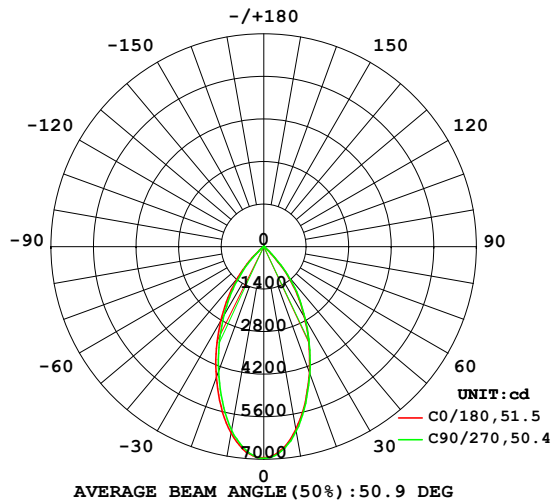

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

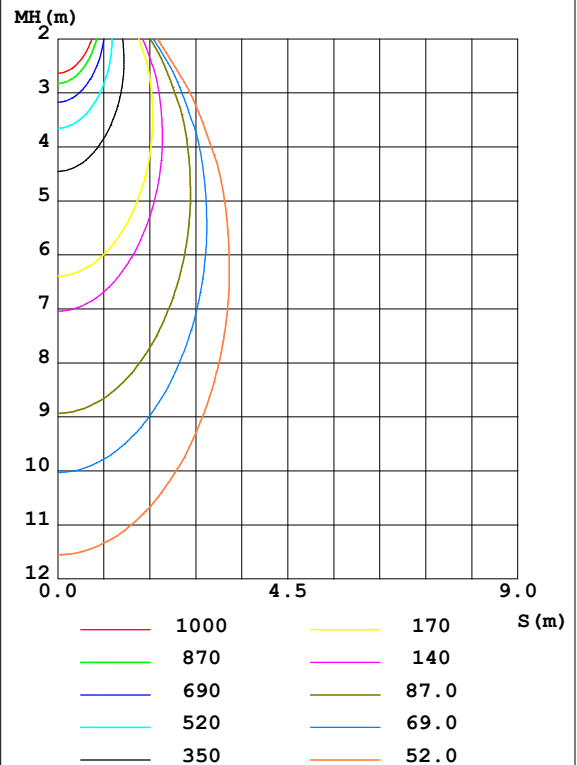

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6113	6070	6161	6364	6227	6232	6124	5937	0- 10	624.4	624.4	11.4,11.4
20	4403	4337	4437	4734	4571	4511	4358	4152	10- 20	1482	2106	38.4,38.4
30	2685	2652	2725	3026	2850	2775	2635	2472	20- 30	1626	3733	68.1,68.1
40	1185	1144	1230	1512	1332	1286	1158	1026	30- 40	1217	4950	90.3,90.3
50	121.1	141.8	167.3	280.8	219.1	210.8	165.2	96.46	40- 50	465.6	5416	98.8,98.8
60	8.213	8.840	11.90	20.84	16.58	16.82	11.97	5.912	50- 60	53.55	5469	99.8,99.8
70	0.1647	0.1501	0.1744	0.1961	0.1840	0.1696	0.1380	0.1382	60- 70	3.195	5472	99.9,99.9
80	0.0848	0.0895	0.1018	0.1089	0.1016	0.1017	0.0774	0.0752	70- 80	0.1339	5473	99.9,99.9
90	0.0340	0.0266	0.0363	0.0362	0.0291	0.0291	0.0195	0.0242	80- 90	0.0630	5473	99.9,99.9
100	0.0315	0.0242	0.0315	0.0266	0.0193	0.0218	0.0194	0.0218	90-100	0.0263	5473	99.9,99.9
110	0.0798	0.0776	0.0653	0.0461	0.0340	0.0363	0.0413	0.0604	100-110	0.0357	5473	99.9,99.9
120	0.4329	0.4243	0.3724	0.3128	0.2183	0.2152	0.2426	0.3266	110-120	0.1532	5473	99.9,99.9
130	1.224	1.202	1.132	1.028	0.7373	0.7429	0.7905	0.9461	120-130	0.5459	5473	99.9,99.9
140	2.389	2.380	2.280	2.130	1.621	1.629	1.730	1.893	130-140	1.121	5475	99.9,99.9
150	3.798	3.840	3.728	3.554	2.774	2.835	2.980	3.169	140-150	1.649	5476	99.9,99.9
160	5.181	5.293	5.196	5.036	4.245	4.324	4.470	4.680	150-160	1.866	5478	100,100
170	6.080	6.098	6.117	6.103	5.540	5.574	5.695	5.828	160-170	1.512	5480	100,100
180	6.333	6.219	6.301	6.408	6.282	6.246	6.301	6.425	170-180	0.5814	5480	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

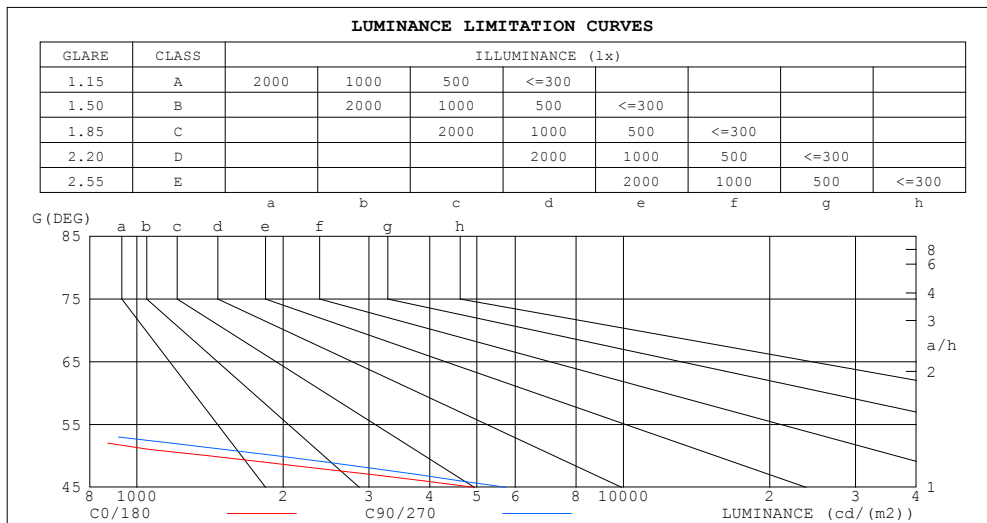

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5	6
80	4	4
75	4	4
70	4	4
65	4	12
60	122	176
55	364	548
50	1395	1928
45	4922	5731


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.83	.87	.84	.82	.81
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.78	.72	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.70	.67	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.61	.58	.57
9.0	.65	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54
10.0	.62	.56	.52	.61	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50

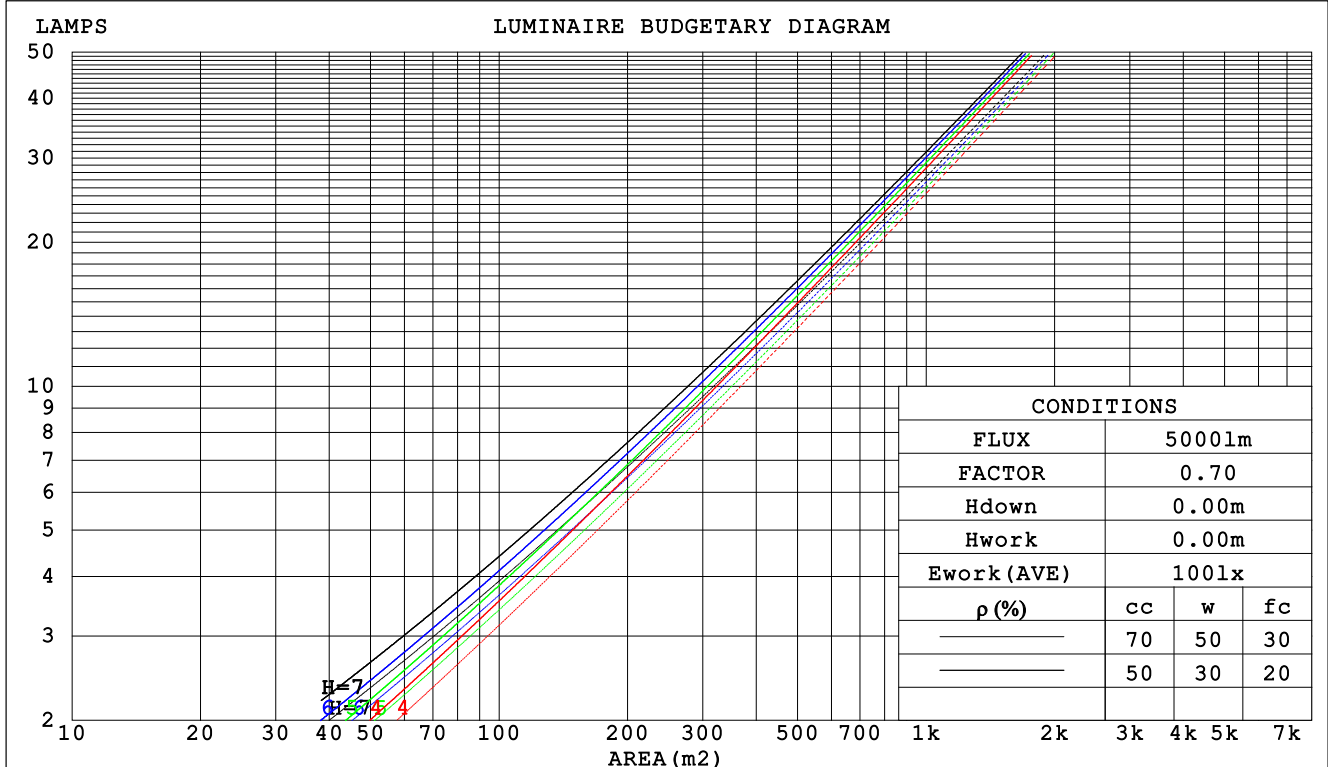

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm					
NAME: WL-2CLD6IN55WB5D3HVWH-90			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 6IN		SERIAL No.:
MFR.: WS			SUR.:0.043*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.171	.094	.029	.166	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.133	.074	.023		
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.073	.022	.130	.071	.022		
5.0	.149	.076	.022	.146	.075	.022	.139	.072	.021	.132	.070	.021	.126	.067	.020		
6.0	.143	.071	.020	.139	.070	.020	.133	.068	.020	.128	.066	.019	.122	.064	.019		
7.0	.136	.067	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.125	.061	.017	.123	.060	.017	.119	.059	.017	.114	.057	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.134	.114	.135	.115	.098	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.080	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.127	.088	.060	.109	.077	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.103	.069	.044	.071	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.037	.067	.044	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.066	.037	.092	.057	.032	.064	.040	.023	.037	.024	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.036	.022	.012	.012	.007	.004	
10.0	.098	.056	.028	.084	.049	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm										
NAME: WL-2CLD6IN55WB5D3HVWH-90					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 6IN			SERIAL No.:		
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.0	14.9	14.2	15.1	15.3	14.2	15.2	14.4	15.3	15.5
3H	13.8	14.7	14.0	14.9	15.1	14.0	14.9	14.3	15.1	15.3
4H	13.7	14.5	14.0	14.8	15.0	13.9	14.8	14.2	15.0	15.2
6H	13.6	14.4	13.9	14.6	14.9	13.8	14.6	14.1	14.9	15.1
8H	13.6	14.3	13.9	14.6	14.8	13.8	14.5	14.1	14.8	15.1
12H	13.5	14.2	13.8	14.5	14.8	13.7	14.5	14.1	14.7	15.0
4H 2H	13.7	14.5	14.0	14.8	15.0	13.9	14.8	14.2	15.0	15.2
3H	13.5	14.2	13.8	14.5	14.8	13.7	14.5	14.1	14.7	15.0
4H	13.4	14.1	13.8	14.4	14.7	13.7	14.3	14.0	14.6	14.9
6H	13.3	13.9	13.7	14.2	14.6	13.6	14.1	13.9	14.5	14.8
8H	13.3	13.8	13.7	14.2	14.5	13.5	14.0	13.9	14.4	14.8
12H	13.2	13.7	13.6	14.1	14.5	13.5	13.9	13.9	14.3	14.7
8H 4H	13.3	13.8	13.7	14.2	14.5	13.5	14.0	13.9	14.4	14.8
6H	13.2	13.6	13.6	14.0	14.4	13.4	13.8	13.8	14.2	14.6
8H	13.1	13.5	13.6	13.9	14.4	13.3	13.7	13.8	14.1	14.6
12H	13.1	13.4	13.5	13.8	14.3	13.3	13.6	13.8	14.1	14.5
12H 4H	13.2	13.7	13.6	14.1	14.5	13.5	13.9	13.9	14.3	14.7
6H	13.1	13.5	13.6	13.9	14.4	13.3	13.7	13.8	14.1	14.6
8H	13.1	13.4	13.5	13.8	14.3	13.3	13.6	13.8	14.1	14.5
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -21.2					+ 3.1 / -19.6				
1.5H	+ 5.3 / -16.5					+ 5.3 / -16.1				
2.0H	+ 7.9 / -32.1					+ 8.0 / -27.2				

CIE Pub.117 Corrected 5480 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.9)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

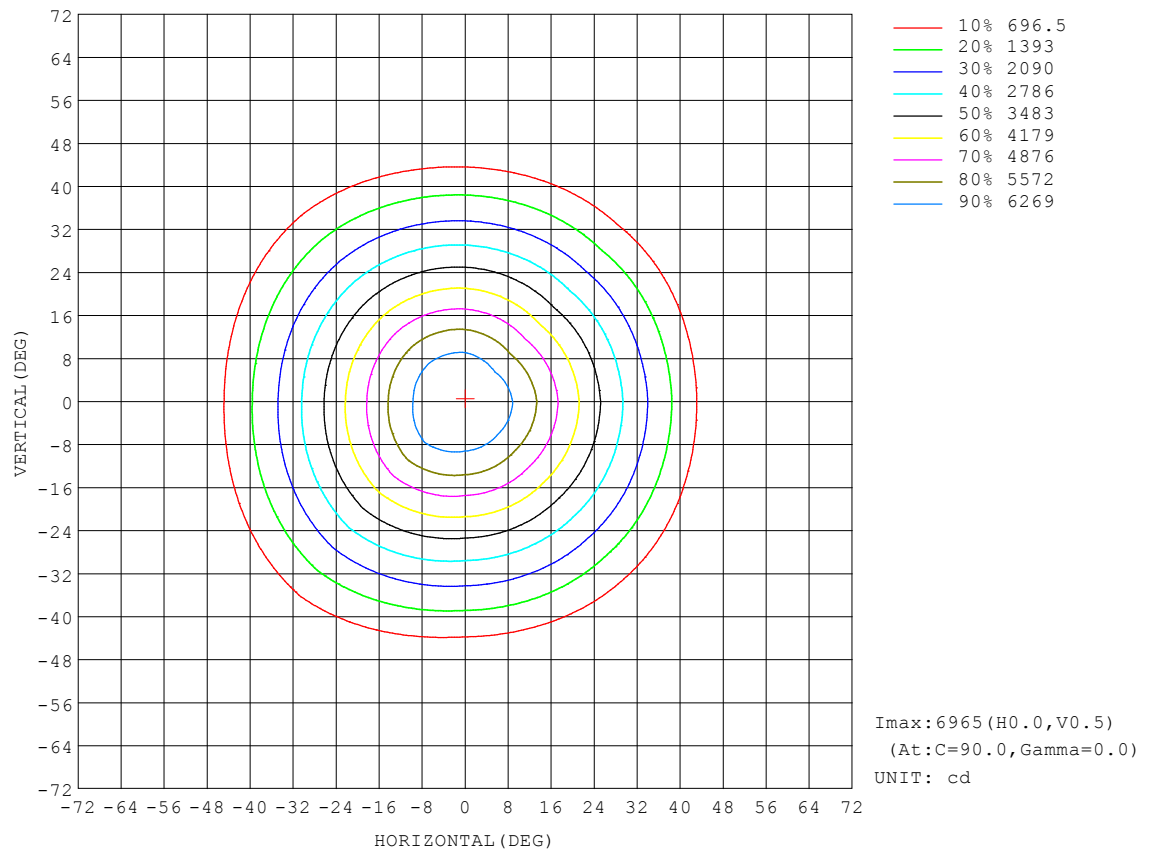


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

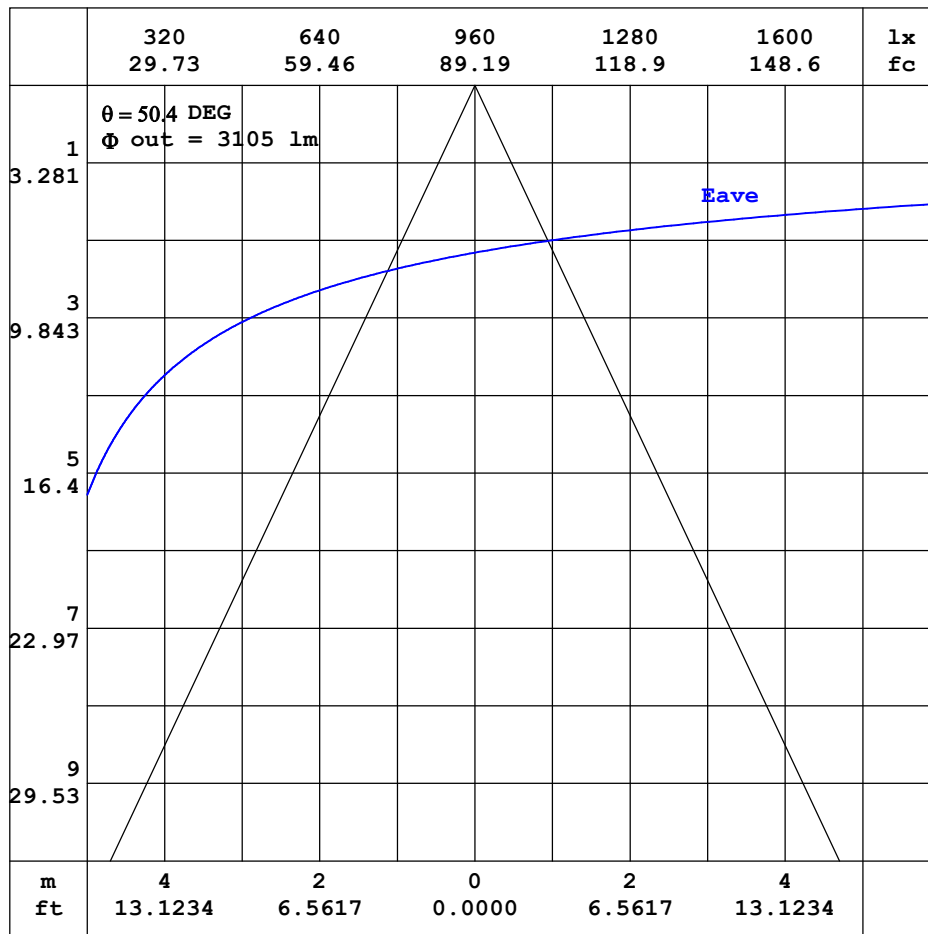


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

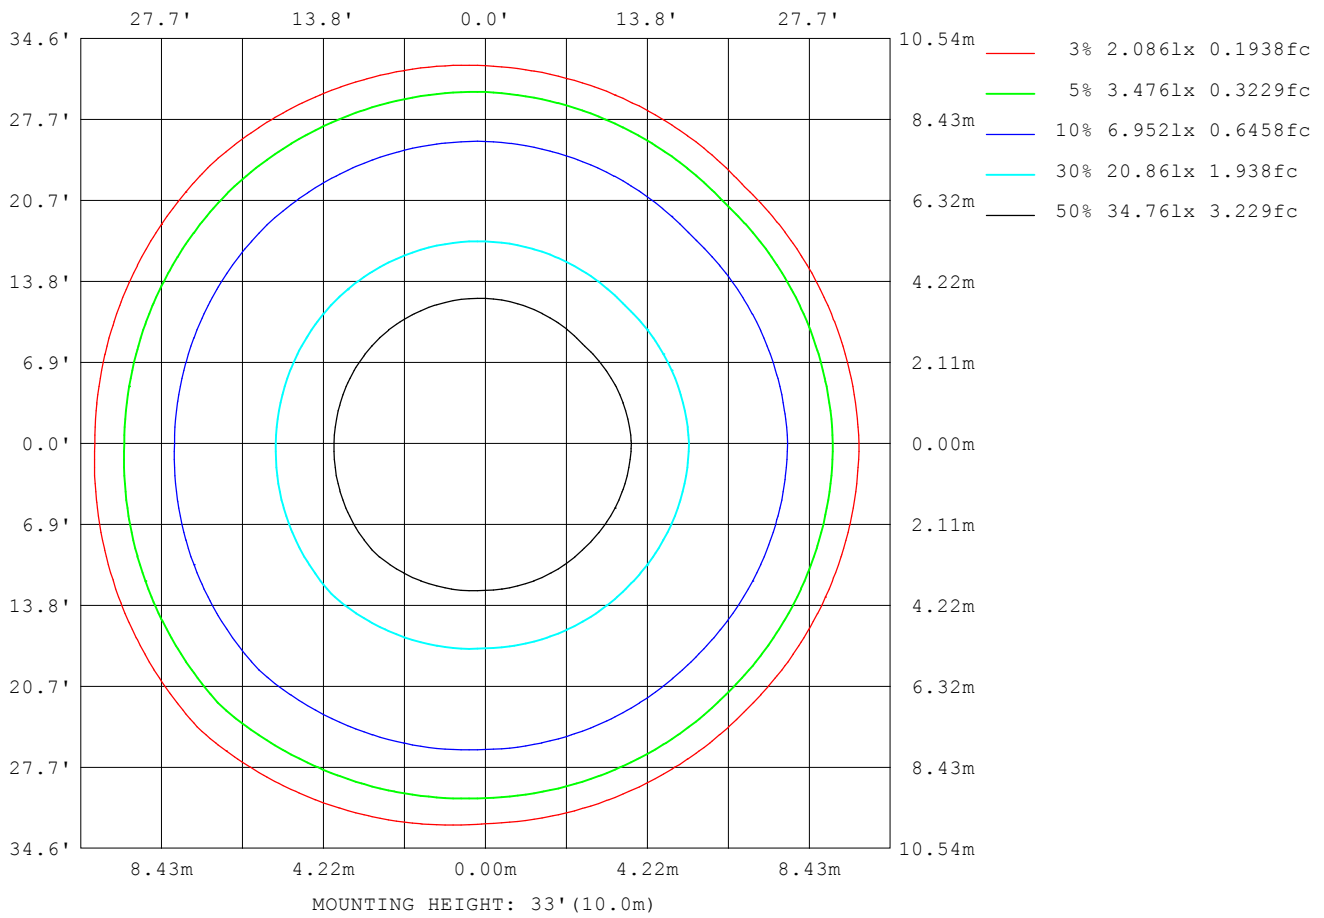

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	26
L_0~180 (75) av	4
L_0~180 (85) av	5
L_90~270 (65) av	11
L_90~270 (75) av	4
L_90~270 (85) av	5
L_45 (65) av	33
L_45 (75) av	4
L_45 (85) av	5

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

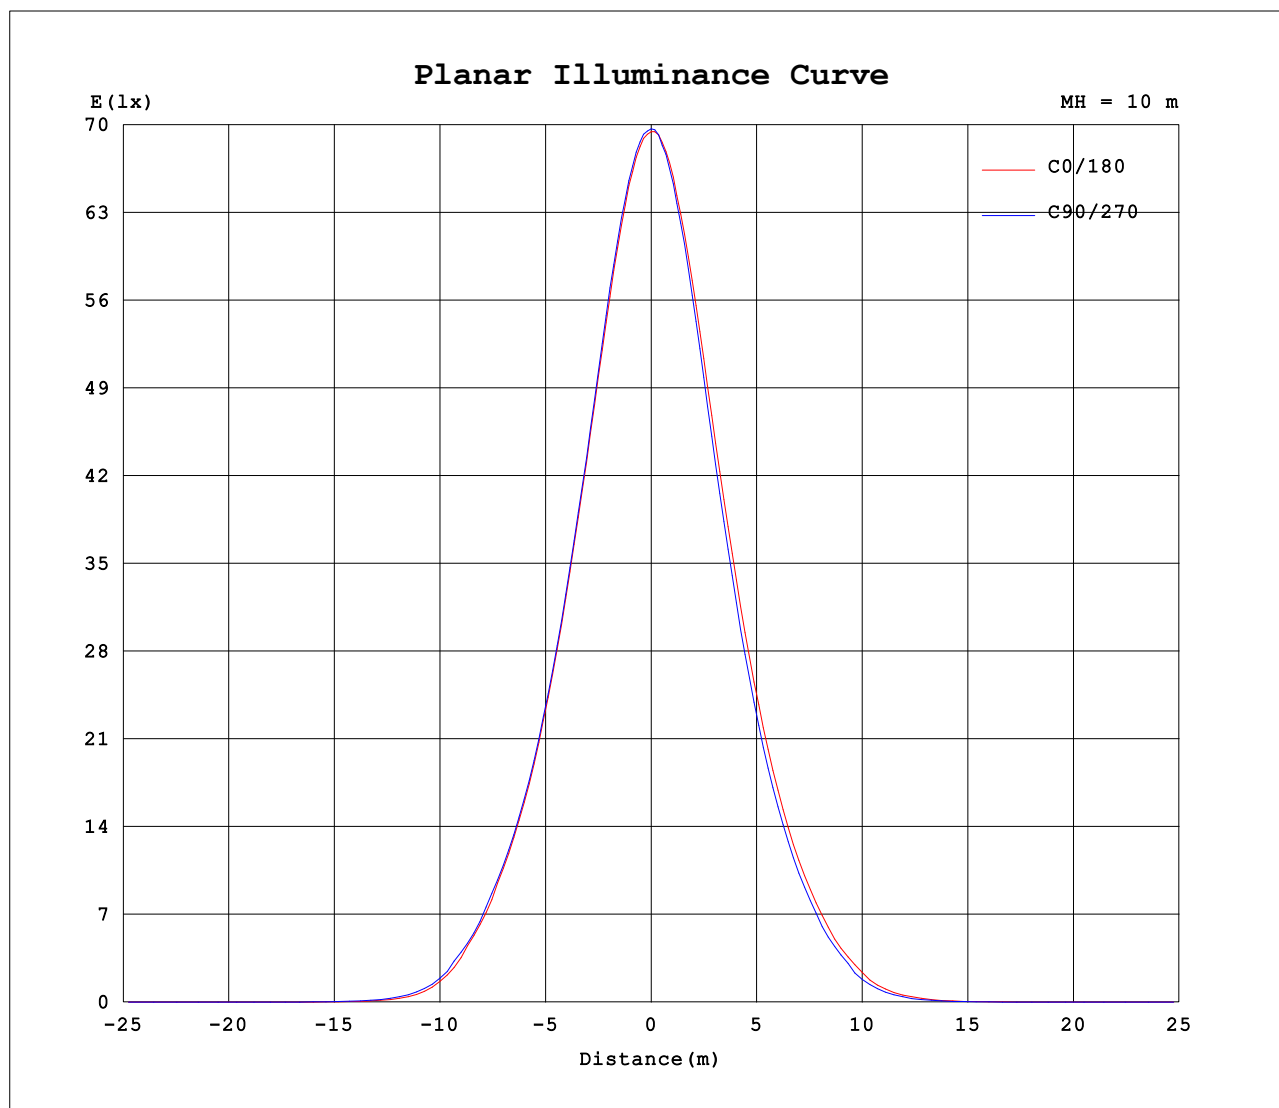

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.4430A P:52.90W PF:0.9940 Freq:60.00Hz Lamp Flux:5480.18x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH-90	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	6945	6959	6968	6944	6945	6959	6968	6944										
5	6705	6704	6749	6842	6776	6793	6727	6604										
10	6113	6070	6161	6364	6227	6232	6124	5937										
15	5289	5232	5336	5606	5449	5418	5271	5053										
20	4403	4337	4437	4734	4571	4511	4358	4152										
25	3517	3461	3554	3849	3696	3622	3473	3287										
30	2685	2652	2725	3026	2850	2775	2635	2472										
35	1944	1899	1990	2244	2058	2003	1874	1743										
40	1185	1144	1230	1512	1332	1286	1158	1026										
45	470	466	547	837	674	669	518	383										
50	121	142	167	281	219	211	165	96.5										
55	28.2	31.2	42.4	74.6	56.3	59.6	40.2	24.0										
60	8.21	8.84	11.9	20.8	16.6	16.8	12.0	5.91										
65	0.20	0.20	0.71	4.68	2.78	2.54	0.56	0.18										
70	0.16	0.15	0.17	0.20	0.18	0.17	0.14	0.14										
75	0.13	0.11	0.14	0.15	0.14	0.13	0.11	0.10										
80	0.08	0.09	0.10	0.11	0.10	0.10	0.08	0.08										
85	0.05	0.05	0.07	0.07	0.07	0.06	0.05	0.03										
90	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02										
95	0.04	0.02	0.02	0.02	0.02	0.02	0.01	0.02										
100	0.03	0.02	0.03	0.03	0.02	0.02	0.02	0.02										
105	0.05	0.05	0.03	0.03	0.02	0.02	0.02	0.03										
110	0.08	0.08	0.07	0.05	0.03	0.04	0.04	0.06										
115	0.20	0.19	0.16	0.12	0.09	0.09	0.10	0.16										
120	0.43	0.42	0.37	0.31	0.22	0.22	0.24	0.33										
125	0.79	0.77	0.70	0.62	0.43	0.43	0.47	0.58										
130	1.22	1.20	1.13	1.03	0.74	0.74	0.79	0.95										
135	1.78	1.74	1.66	1.53	1.14	1.14	1.23	1.37										
140	2.39	2.38	2.28	2.13	1.62	1.63	1.73	1.89										
145	3.08	3.09	3.01	2.81	2.17	2.19	2.32	2.48										
150	3.80	3.84	3.73	3.55	2.77	2.83	2.98	3.17										
155	4.51	4.62	4.49	4.32	3.49	3.55	3.73	3.92										
160	5.18	5.29	5.20	5.04	4.24	4.32	4.47	4.68										
165	5.72	5.78	5.74	5.67	4.97	5.01	5.12	5.31										
170	6.08	6.10	6.12	6.10	5.54	5.57	5.69	5.83										
175	6.25	6.26	6.33	6.34	6.01	6.01	6.12	6.26										
180	6.33	6.22	6.30	6.41	6.28	6.25	6.30	6.43										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: