


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.97 lm/W			
MODEL		I _{max} (cd)	7115	S/MH(C0/180)	0.76
NOMINAL POWER(W)	55W	LOR(%)	100.0	S/MH(C90/270)	0.76
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	5595.1	η UP,DN(C0-180)	0.1,50.5
NOMINAL FLUX(lm)	5595.08	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.4
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

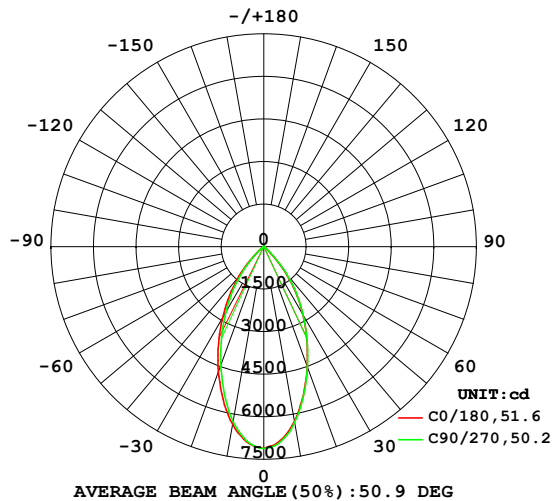

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

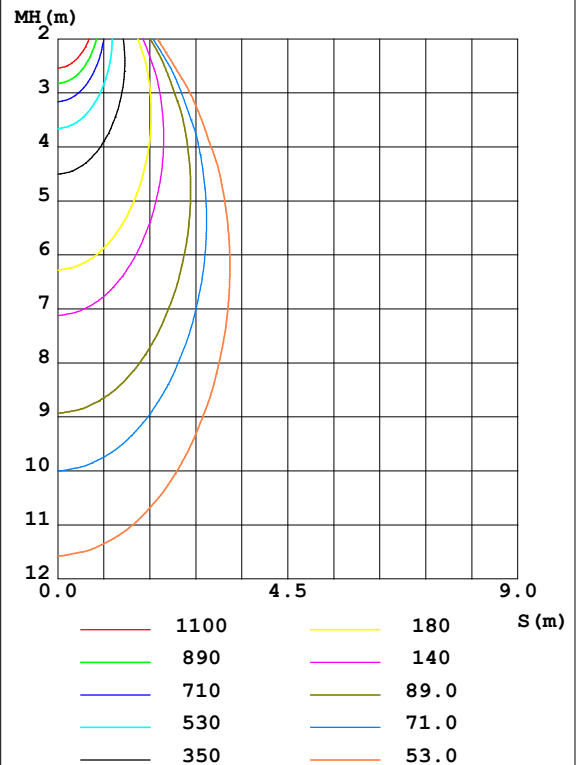

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6244	6200	6293	6499	6358	6370	6259	6066	0- 10	637.8	637.8	11.4,11.4
20	4495	4422	4514	4831	4683	4602	4456	4248	10- 20	1513	2151	38.4,38.4
30	2757	2702	2773	3095	2922	2828	2682	2535	20- 30	1661	3812	68.1,68.1
40	1203	1166	1234	1551	1369	1311	1181	1055	30- 40	1242	5054	90.3,90.3
50	122.8	145.1	168.2	289.4	226.3	213.9	173.5	98.95	40- 50	475.5	5529	98.8,98.8
60	8.379	9.033	12.18	21.33	16.99	17.11	12.20	6.036	50- 60	54.85	5584	99.8,99.8
70	0.1647	0.1477	0.1769	0.1961	0.1816	0.1720	0.1501	0.1453	60- 70	3.272	5588	99.9,99.9
80	0.0872	0.0799	0.0970	0.1090	0.1064	0.0969	0.0774	0.0800	70- 80	0.1355	5588	99.9,99.9
90	0.0267	0.0267	0.0243	0.0435	0.0314	0.0219	0.0290	0.0194	80- 90	0.0629	5588	99.9,99.9
100	0.0363	0.0291	0.0314	0.0242	0.0242	0.0194	0.0169	0.0194	90-100	0.0281	5588	99.9,99.9
110	0.0797	0.0679	0.0604	0.0461	0.0340	0.0387	0.0388	0.0725	100-110	0.0343	5588	99.9,99.9
120	0.4038	0.3976	0.3458	0.2910	0.2183	0.2201	0.2546	0.3266	110-120	0.1478	5588	99.9,99.9
130	1.149	1.122	1.050	0.9502	0.7566	0.7404	0.8171	0.9510	120-130	0.5259	5588	99.9,99.9
140	2.260	2.244	2.139	1.985	1.655	1.648	1.764	1.941	130-140	1.089	5590	99.9,99.9
150	3.631	3.670	3.532	3.365	2.835	2.871	3.027	3.234	140-150	1.612	5591	99.9,99.9
160	5.039	5.070	4.946	4.811	4.320	4.344	4.506	4.734	150-160	1.833	5593	100,100
170	5.930	5.958	5.916	5.888	5.569	5.545	5.653	5.870	160-170	1.488	5595	100,100
180	6.139	6.212	6.234	6.311	6.151	6.134	6.209	6.326	170-180	0.5719	5595	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

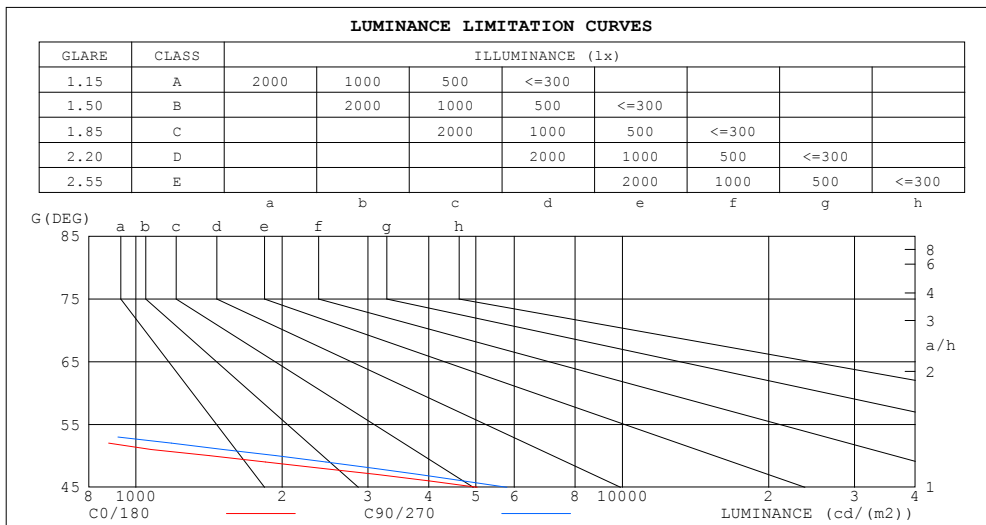

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5	5
80	4	4
75	3	4
70	4	4
65	4	13
60	124	180
55	368	550
50	1415	1938
45	5031	5794


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.84	.82	.81
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.78	.72	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.70	.67	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
9.0	.65	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54
10.0	.62	.56	.52	.61	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50

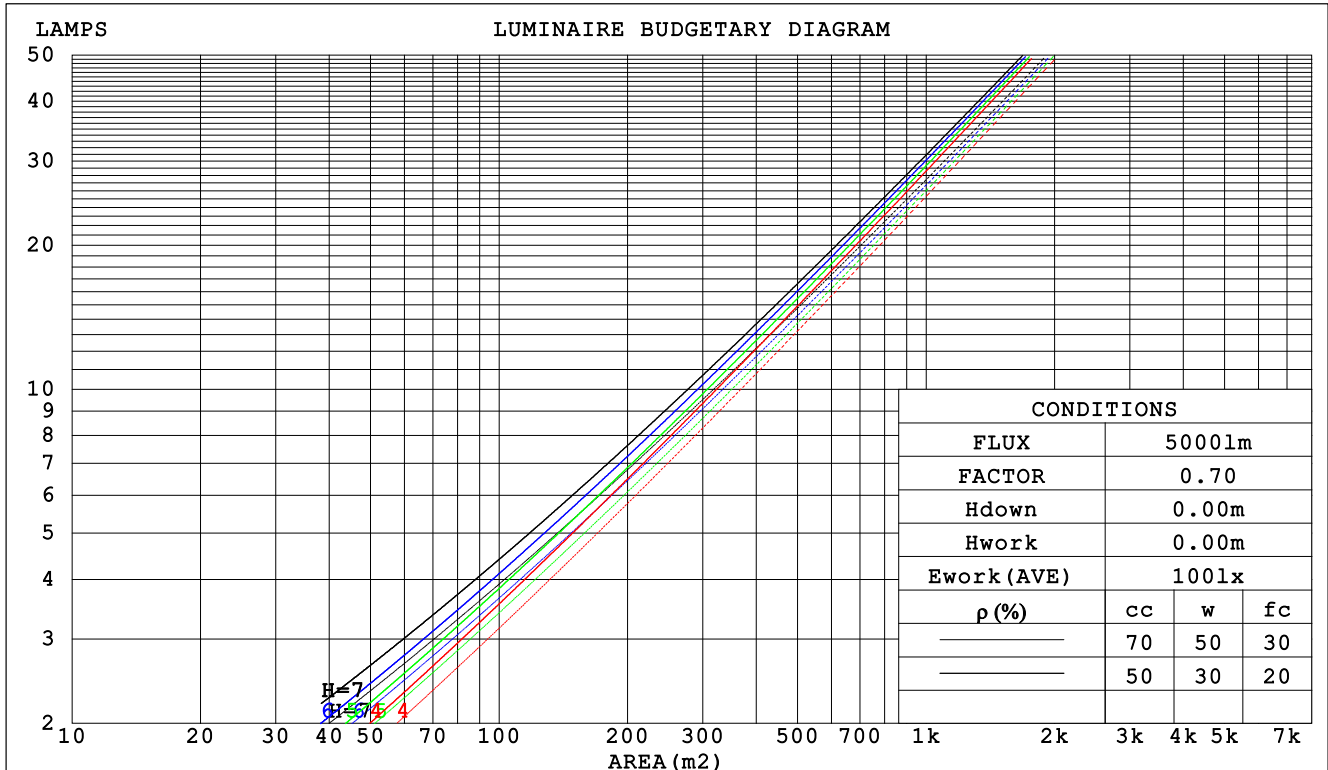

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.171	.094	.029	.166	.091	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.133	.074	.023		
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.073	.022	.130	.071	.022		
5.0	.149	.076	.022	.146	.075	.022	.139	.072	.021	.132	.070	.021	.126	.067	.020		
6.0	.143	.071	.020	.139	.070	.020	.133	.068	.020	.128	.066	.019	.122	.064	.019		
7.0	.136	.067	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017		
9.0	.125	.061	.017	.123	.060	.017	.119	.059	.017	.114	.057	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.125	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.134	.114	.135	.115	.098	.092	.080	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.090	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.080	.060	.045	.046	.035	.026	.015	.011	.009	
5.0	.126	.088	.060	.109	.076	.052	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.050	.102	.069	.044	.071	.048	.031	.041	.028	.018	.013	.009	.006	
7.0	.113	.072	.043	.097	.062	.037	.067	.044	.026	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.024	.014	.012	.008	.004	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.036	.022	.012	.012	.007	.004	
10.0	.098	.056	.028	.084	.049	.025	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm										
NAME: WL-2CLD6IN55WB5D3HVWH					TYPE:5000K			WEIGHT:		
SPEC.:					DIM.: 6IN			SERIAL No.:		
MFR.: WS					SUR.:0.043*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.0	15.0	14.2	15.1	15.3	14.2	15.2	14.5	15.4	15.5
3H	13.8	14.7	14.1	14.9	15.1	14.0	14.9	14.3	15.1	15.3
4H	13.8	14.6	14.0	14.8	15.0	14.0	14.8	14.2	15.0	15.2
6H	13.7	14.4	14.0	14.7	14.9	13.9	14.6	14.2	14.9	15.1
8H	13.6	14.4	13.9	14.6	14.9	13.8	14.6	14.1	14.8	15.1
12H	13.6	14.3	13.9	14.6	14.8	13.8	14.5	14.1	14.8	15.0
4H 2H	13.8	14.6	14.0	14.8	15.0	14.0	14.8	14.2	15.0	15.2
3H	13.6	14.3	13.9	14.6	14.8	13.8	14.5	14.1	14.8	15.0
4H	13.5	14.1	13.8	14.4	14.7	13.7	14.3	14.0	14.6	14.9
6H	13.4	13.9	13.8	14.3	14.6	13.6	14.2	14.0	14.5	14.8
8H	13.3	13.9	13.7	14.2	14.6	13.5	14.1	13.9	14.4	14.8
12H	13.3	13.8	13.7	14.1	14.5	13.5	14.0	13.9	14.3	14.7
8H 4H	13.3	13.9	13.7	14.2	14.6	13.5	14.1	13.9	14.4	14.8
6H	13.2	13.7	13.7	14.1	14.5	13.4	13.9	13.9	14.3	14.7
8H	13.2	13.6	13.6	14.0	14.4	13.4	13.8	13.8	14.2	14.6
12H	13.1	13.4	13.6	13.9	14.4	13.3	13.7	13.8	14.1	14.6
12H 4H	13.3	13.8	13.7	14.1	14.5	13.5	14.0	13.9	14.3	14.7
6H	13.2	13.6	13.6	14.0	14.4	13.4	13.8	13.8	14.2	14.6
8H	13.1	13.4	13.6	13.9	14.4	13.3	13.7	13.8	14.1	14.6
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -21.2					+ 3.1 / -19.5				
1.5H	+ 5.2 / -16.5					+ 5.3 / -16.0				
2.0H	+ 7.9 / -31.9					+ 8.0 / -27.0				

CIE Pub.117 Corrected 5595 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

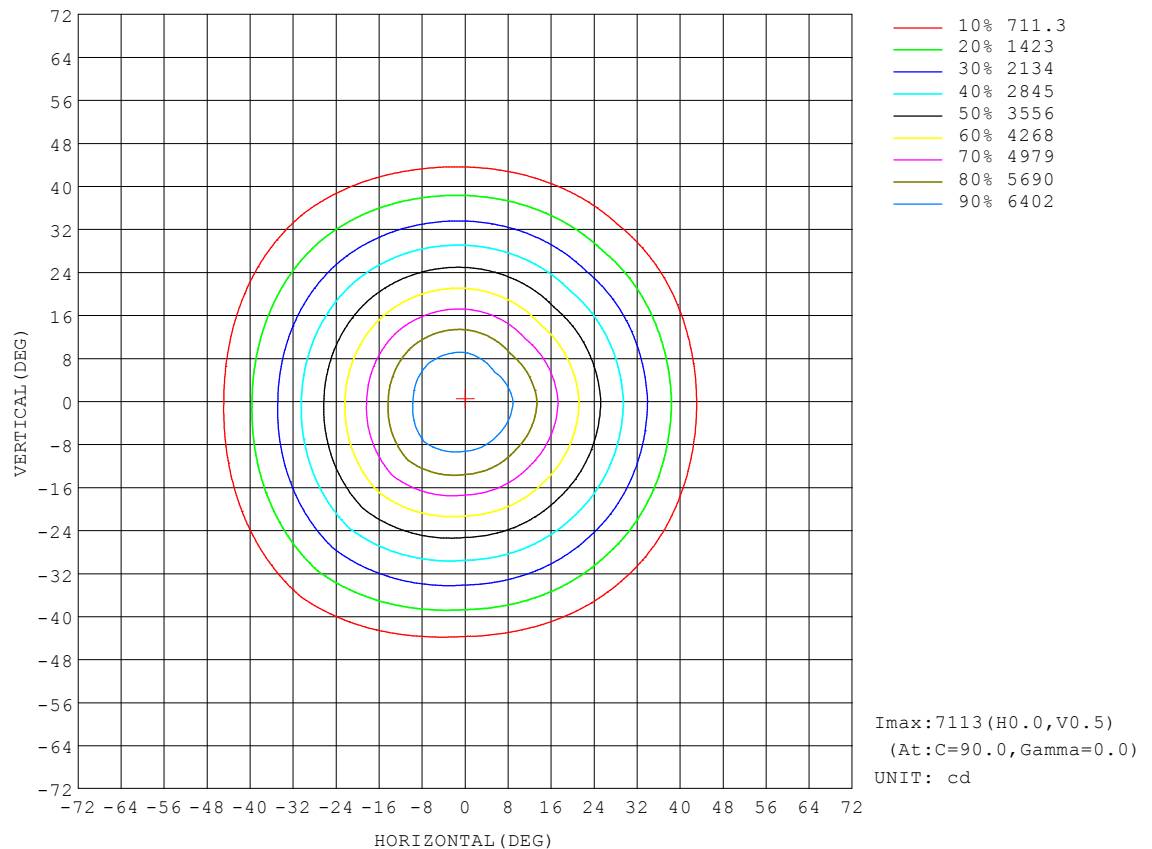


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

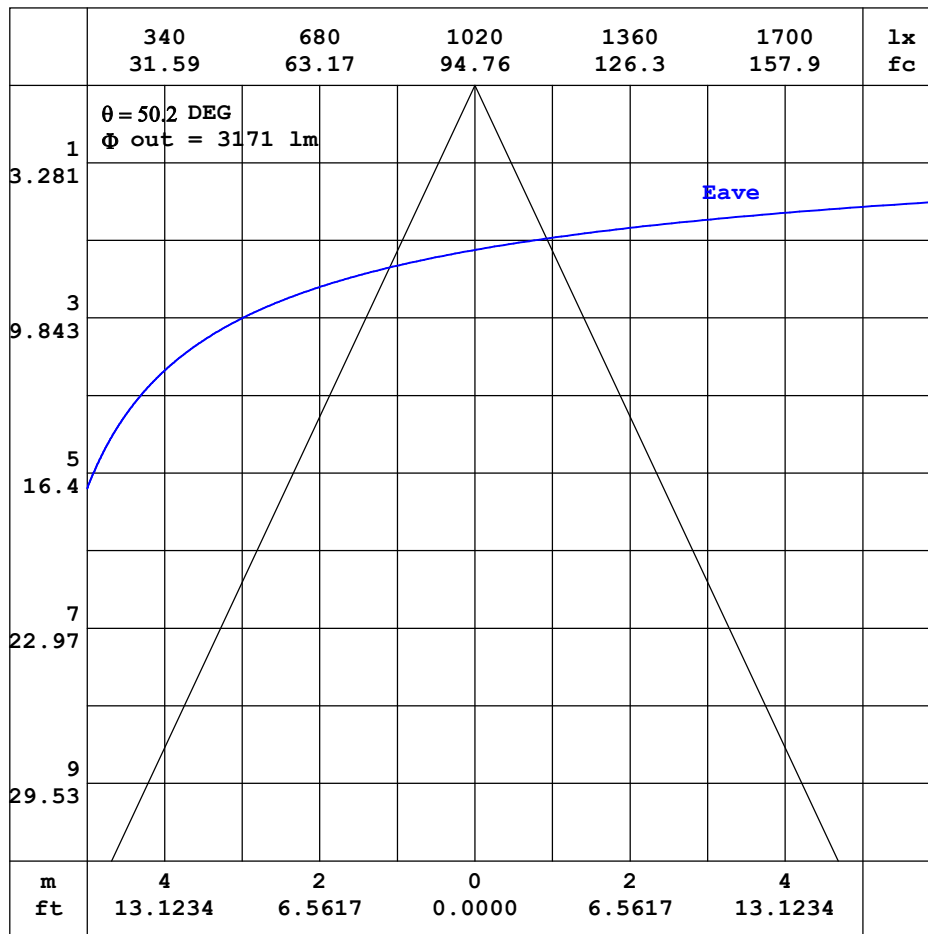


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

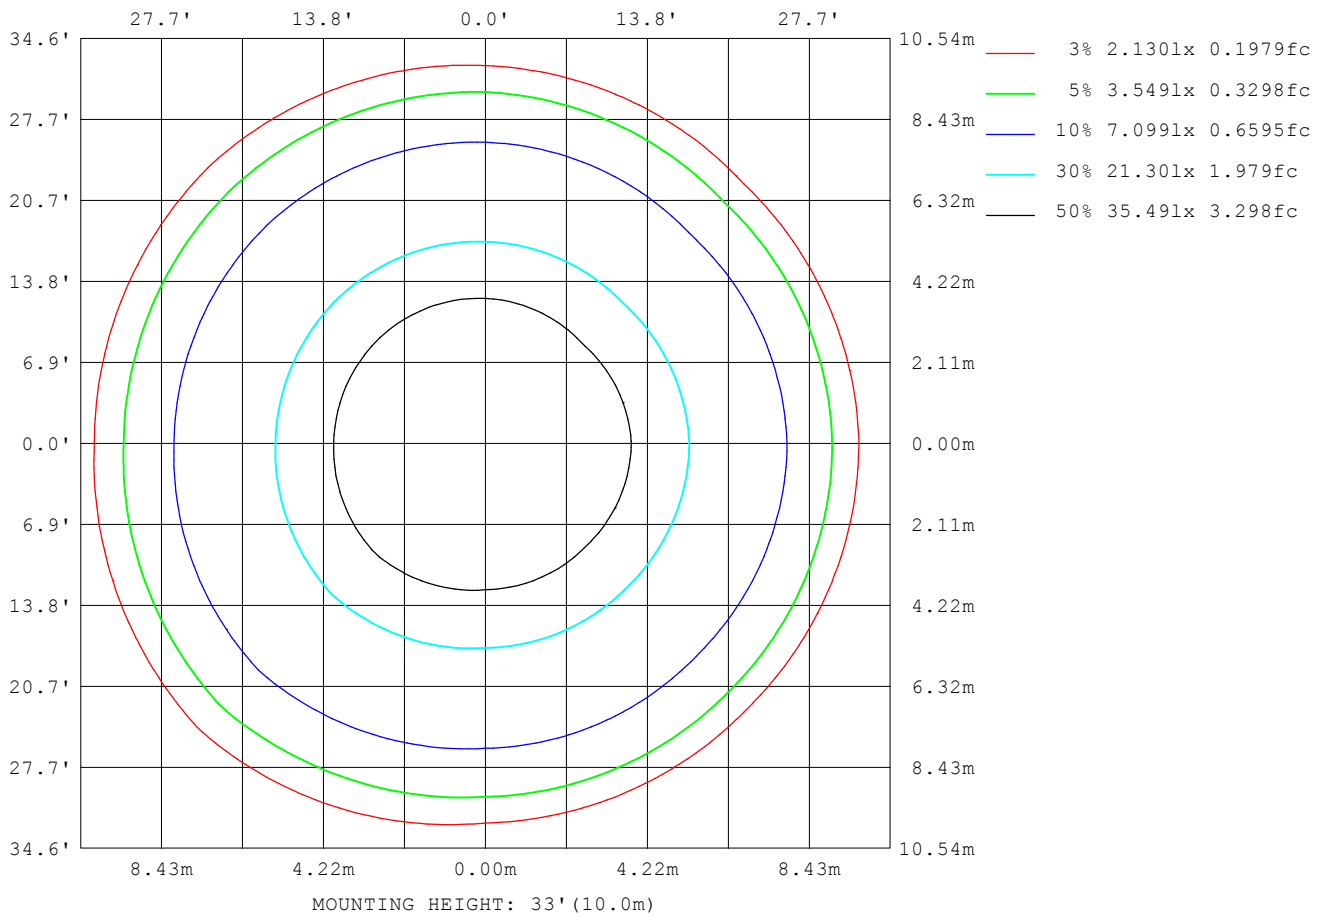

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	27
L_0~180 (75) av	4
L_0~180 (85) av	5
L_90~270 (65) av	12
L_90~270 (75) av	4
L_90~270 (85) av	4
L_45 (65) av	34
L_45 (75) av	4
L_45 (85) av	5

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

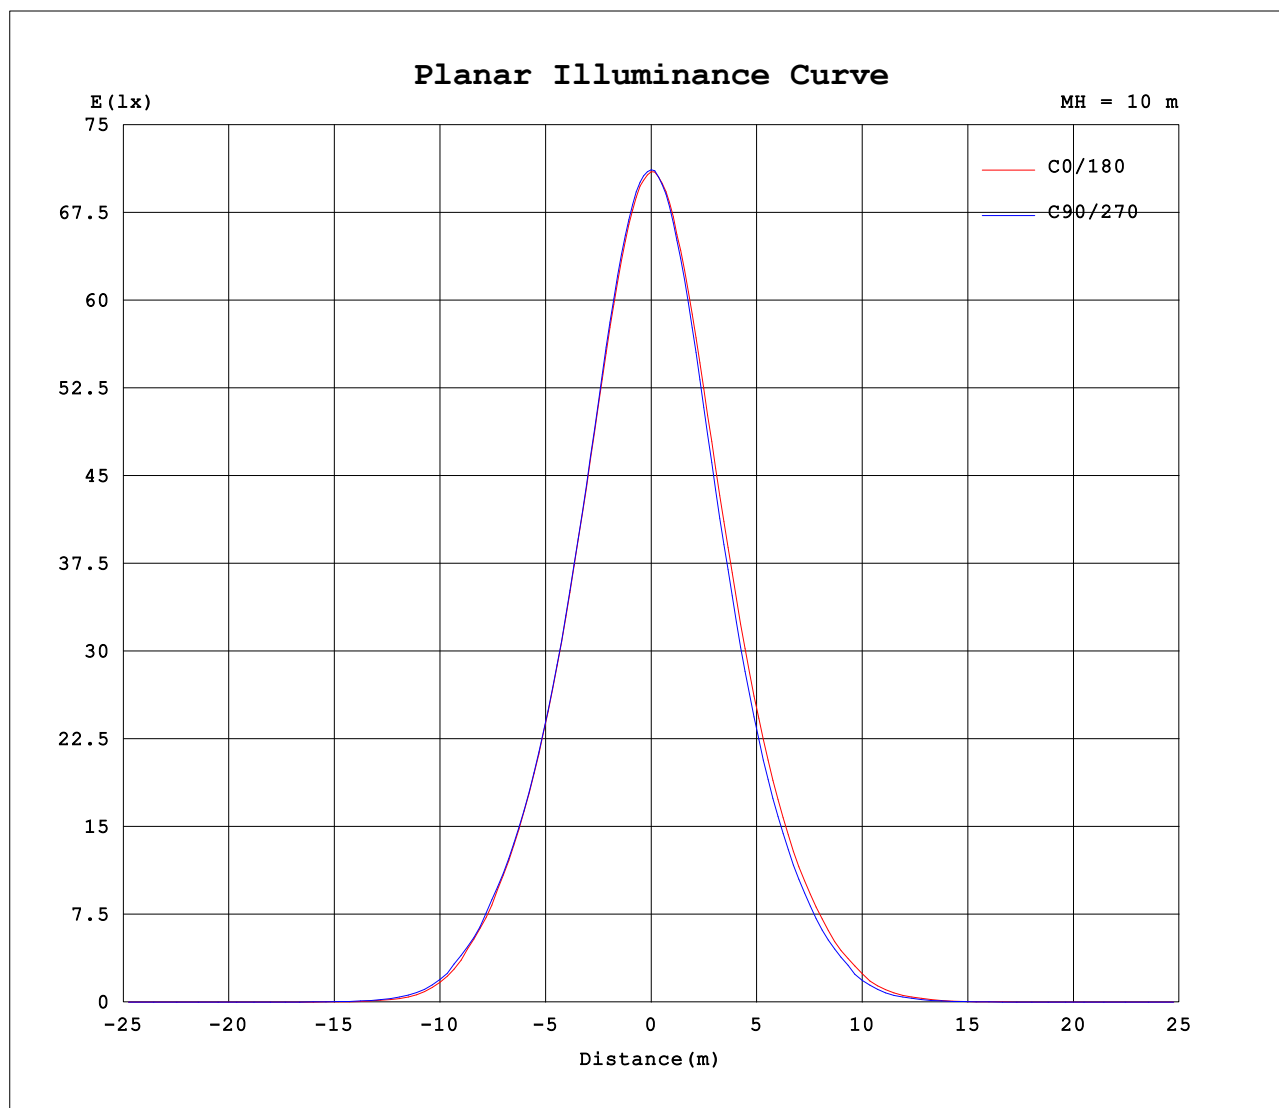

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.4430A P:52.80W PF:0.9930 Freq:60.00Hz Lamp Flux:5595.08x1 lm		
NAME: WL-2CLD6IN55WB5D3HVWH	TYPE:5000K	WEIGHT:
SPEC.:	DIM.: 6IN	SERIAL No.:
MFR.: WS	SUR.:0.043*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	7099	7105	7115	7086	7099	7105	7115	7086										
5	6851	6848	6899	6996	6915	6940	6880	6738										
10	6244	6200	6293	6499	6358	6370	6259	6066										
15	5408	5341	5437	5731	5568	5528	5385	5172										
20	4495	4422	4514	4831	4683	4602	4456	4248										
25	3598	3527	3612	3934	3786	3690	3538	3364										
30	2757	2702	2773	3095	2922	2828	2682	2535										
35	1980	1938	2007	2299	2108	2042	1912	1789										
40	1203	1166	1234	1551	1369	1311	1181	1055										
45	480	475	553	857	696	684	528	396										
50	123	145	168	289	226	214	174	99.0										
55	28.5	32.1	42.6	76.7	57.8	60.9	41.2	24.6										
60	8.38	9.03	12.2	21.3	17.0	17.1	12.2	6.04										
65	0.21	0.20	0.74	4.82	2.84	2.59	0.57	0.19										
70	0.16	0.15	0.18	0.20	0.18	0.17	0.15	0.15										
75	0.12	0.12	0.14	0.16	0.14	0.13	0.12	0.11										
80	0.09	0.08	0.10	0.11	0.11	0.10	0.08	0.08										
85	0.05	0.04	0.06	0.08	0.07	0.06	0.05	0.04										
90	0.03	0.03	0.02	0.04	0.03	0.02	0.03	0.02										
95	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.03										
100	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.02										
105	0.04	0.03	0.04	0.03	0.02	0.02	0.02	0.03										
110	0.08	0.07	0.06	0.05	0.03	0.04	0.04	0.07										
115	0.18	0.18	0.15	0.11	0.09	0.09	0.10	0.16										
120	0.40	0.40	0.35	0.29	0.22	0.22	0.25	0.33										
125	0.74	0.71	0.65	0.57	0.43	0.44	0.48	0.60										
130	1.15	1.12	1.05	0.95	0.76	0.74	0.82	0.95										
135	1.67	1.63	1.55	1.42	1.16	1.16	1.25	1.40										
140	2.26	2.24	2.14	1.98	1.66	1.65	1.76	1.94										
145	2.93	2.93	2.83	2.65	2.22	2.22	2.36	2.55										
150	3.63	3.67	3.53	3.37	2.84	2.87	3.03	3.23										
155	4.37	4.40	4.27	4.09	3.58	3.58	3.76	4.00										
160	5.04	5.07	4.95	4.81	4.32	4.34	4.51	4.73										
165	5.56	5.60	5.51	5.42	5.02	5.02	5.15	5.36										
170	5.93	5.96	5.92	5.89	5.57	5.55	5.65	5.87										
175	6.14	6.14	6.16	6.18	5.96	5.95	6.04	6.19										
180	6.14	6.21	6.23	6.31	6.15	6.13	6.21	6.33										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: