


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 119.84 lm/W			
MODEL		I _{max} (cd)	9794	S/MH(C0/180)	0.69
NOMINAL POWER(W)	60W	LOR(%)	100.0	S/MH(C90/270)	0.83
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7154.4	η UP,DN(C0-180)	0.1,45.5
NOMINAL FLUX(lm)	7154.36	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,54.4
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

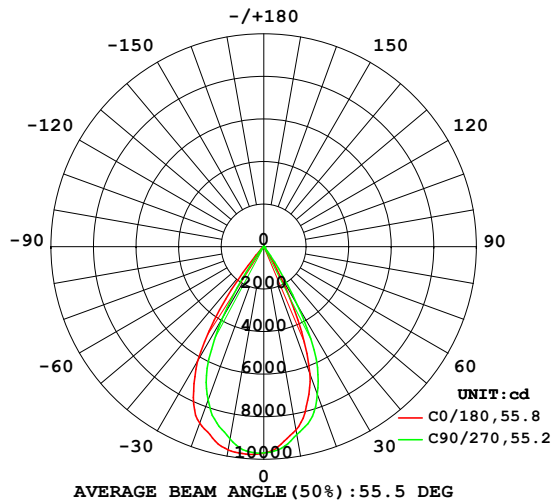

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

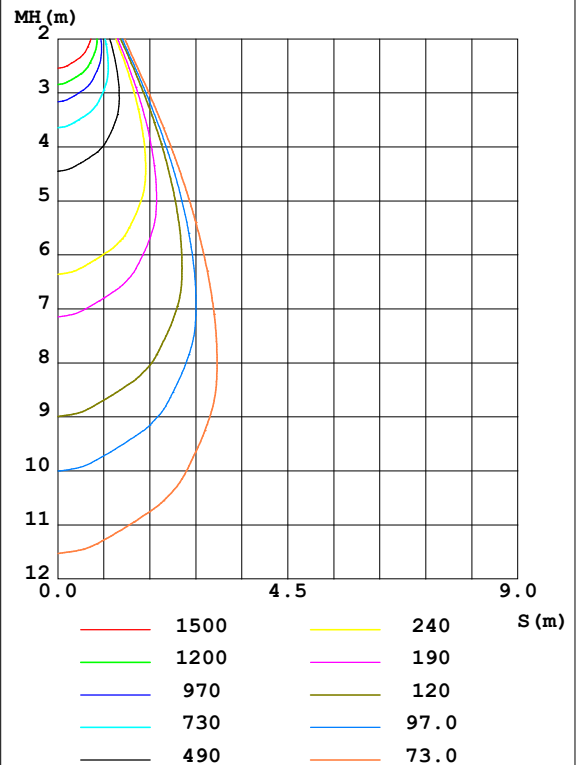

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	8746	8748	8968	9544	9697	9608	9178	8733	0- 10	898.2	898.2	12.6,12.6
20	6346	6580	7379	8651	8833	8481	7653	6414	10- 20	2373	3271	45.7,45.7
30	1289	1645	3186	5886	6233	5910	3921	1496	20- 30	2624	5896	82.4,82.4
40	85.35	93.61	201.7	947.2	1158	895.2	354.4	94.75	30- 40	1104	7000	97.8,97.8
50	15.25	17.37	32.21	71.07	79.68	73.58	39.54	16.78	40- 50	122.6	7122	99.6,99.6
60	0.5451	1.023	7.115	14.76	15.51	14.32	8.344	0.9416	50- 60	18.95	7141	99.8,99.8
70	0.0945	0.0968	0.1187	0.1669	0.5091	0.1737	0.1089	0.0896	60- 70	3.068	7144	99.9,99.9
80	0.0484	0.0605	0.0703	0.0824	0.0823	0.0825	0.0605	0.0485	70- 80	0.0995	7145	99.9,99.9
90	0.0363	0.0436	0.0363	0.0484	0.0339	0.0508	0.0218	0.0242	80- 90	0.0543	7145	99.9,99.9
100	0.0411	0.0411	0.0388	0.0340	0.0218	0.0218	0.0170	0.0219	90-100	0.0347	7145	99.9,99.9
110	0.0654	0.0654	0.0508	0.0436	0.0194	0.0266	0.0194	0.0339	100-110	0.0361	7145	99.9,99.9
120	0.2658	0.2645	0.1425	0.0727	0.0388	0.0436	0.0582	0.1716	110-120	0.0674	7145	99.9,99.9
130	1.848	1.899	1.182	0.4298	0.2307	0.2586	0.4977	1.072	120-130	0.3834	7145	99.9,99.9
140	4.141	4.114	3.361	2.339	1.266	1.364	1.906	2.817	130-140	1.335	7146	99.9,99.9
150	6.171	6.221	5.505	4.594	3.066	3.174	3.870	4.782	140-150	2.280	7149	99.9,99.9
160	7.975	8.229	7.610	6.667	4.882	5.101	5.873	6.958	150-160	2.594	7151	100,100
170	9.751	9.826	9.378	8.674	7.116	7.508	8.472	9.477	160-170	2.156	7153	100,100
180	9.753	9.893	10.08	10.14	9.719	9.864	10.03	10.11	170-180	0.8904	7154	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

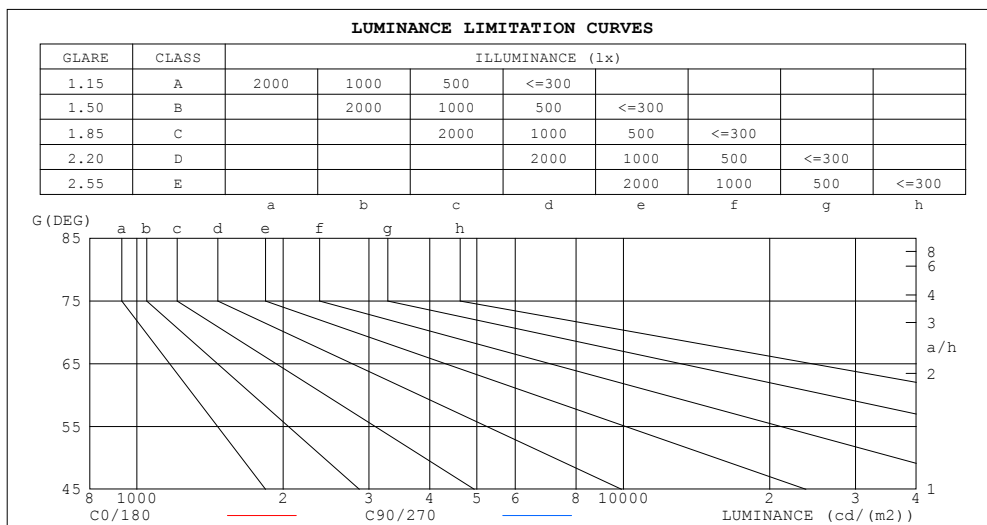

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3	4
80	2	3
75	2	2
70	2	2
65	2	3
60	7	90
55	87	160
50	150	317
45	331	638


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.98	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.79
5.0	.87	.82	.78	.86	.81	.77	.84	.80	.77	.83	.79	.76	.81	.78	.75	.74
6.0	.82	.77	.73	.82	.76	.73	.80	.76	.72	.79	.75	.72	.77	.74	.71	.70
7.0	.78	.72	.69	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.66
8.0	.74	.68	.65	.73	.68	.64	.72	.68	.64	.71	.67	.64	.70	.67	.64	.62
9.0	.70	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
10.0	.67	.61	.58	.66	.61	.58	.66	.61	.58	.65	.60	.57	.64	.60	.57	.56

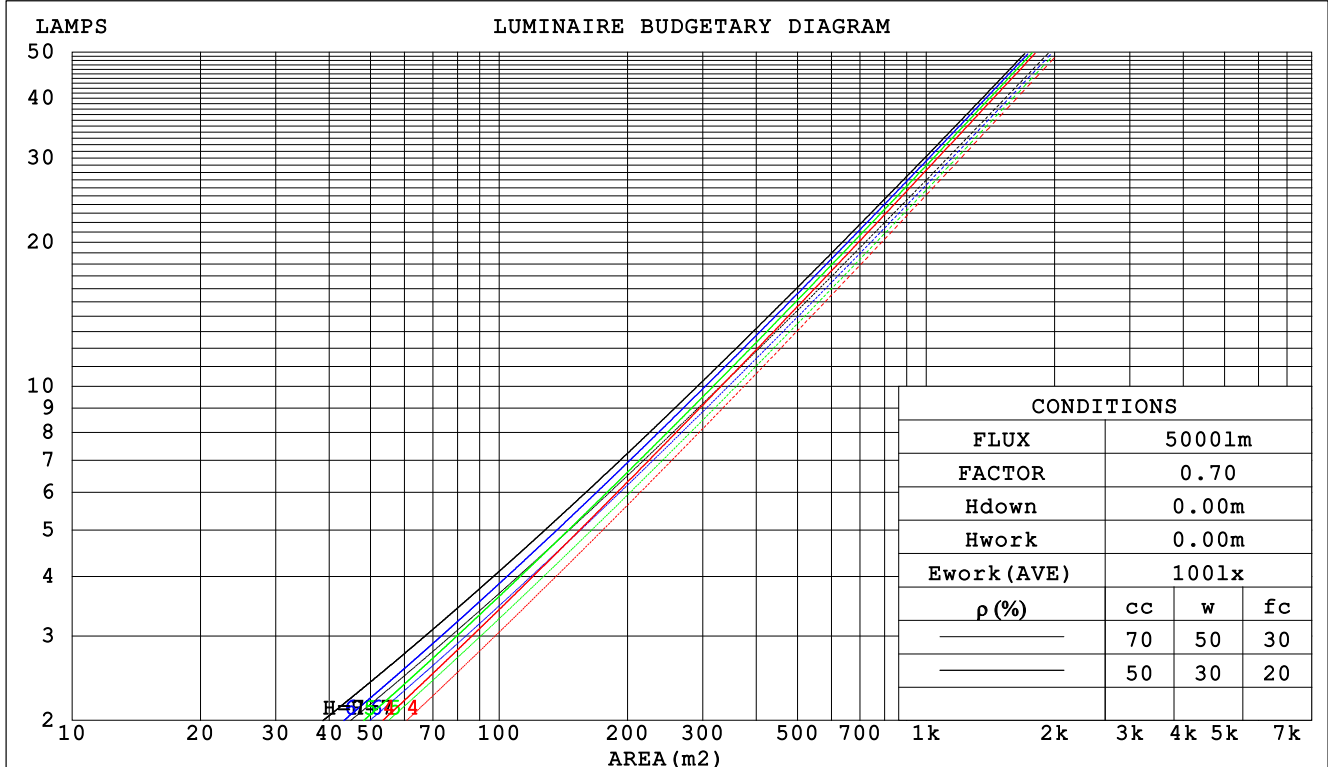

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm					
NAME: WL-2CLD8IN60WB5D3HVWH			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 8IN		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.166	.094	.030	.159	.091	.029	.147	.084	.027	.135	.078	.025	.124	.072	.023		
2.0	.158	.086	.027	.152	.084	.026	.142	.079	.024	.132	.074	.023	.123	.069	.022		
3.0	.150	.080	.024	.145	.078	.023	.136	.074	.022	.128	.070	.022	.120	.067	.021		
4.0	.143	.074	.022	.139	.073	.021	.131	.069	.021	.124	.066	.020	.117	.064	.019		
5.0	.136	.069	.020	.133	.068	.020	.126	.066	.019	.120	.063	.019	.114	.061	.018		
6.0	.130	.065	.019	.127	.064	.018	.121	.062	.018	.116	.060	.018	.111	.058	.017		
7.0	.125	.062	.017	.122	.061	.017	.117	.059	.017	.112	.057	.017	.107	.056	.016		
8.0	.120	.058	.016	.117	.058	.016	.113	.056	.016	.108	.055	.016	.104	.053	.016		
9.0	.115	.056	.016	.113	.055	.015	.109	.054	.015	.105	.053	.015	.101	.051	.015		
10.0	.111	.053	.015	.109	.052	.015	.105	.051	.014	.101	.050	.014	.098	.049	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.158	.147	.147	.136	.126	.100	.094	.087	.058	.054	.051	.018	.017	.016	
2.0	.155	.134	.115	.133	.115	.100	.091	.080	.070	.053	.046	.041	.017	.015	.013	
3.0	.142	.115	.092	.122	.099	.080	.084	.069	.056	.048	.040	.033	.016	.013	.011	
4.0	.132	.100	.075	.113	.086	.065	.078	.060	.046	.045	.035	.027	.014	.011	.009	
5.0	.123	.088	.062	.105	.076	.054	.073	.053	.038	.042	.031	.023	.014	.010	.007	
6.0	.115	.078	.052	.099	.068	.045	.068	.048	.032	.040	.028	.019	.013	.009	.006	
7.0	.109	.071	.044	.093	.061	.039	.064	.043	.027	.037	.025	.016	.012	.008	.005	
8.0	.103	.065	.038	.089	.056	.033	.061	.039	.024	.036	.023	.014	.012	.008	.005	
9.0	.098	.059	.033	.084	.051	.029	.058	.036	.021	.034	.021	.012	.011	.007	.004	
10.0	.093	.055	.029	.080	.048	.026	.056	.034	.018	.033	.020	.011	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm										
NAME: WL-2CLD8IN60WB5D3HVWH					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 8IN			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	0.8	1.7	1.1	1.9	2.0	6.8	7.7	7.1	7.9	8.1
3H	0.7	1.5	0.9	1.7	1.9	6.7	7.5	6.9	7.7	7.9
4H	0.6	1.3	0.9	1.6	1.8	6.6	7.4	6.9	7.6	7.8
6H	0.5	1.2	0.8	1.4	1.7	6.5	7.2	6.8	7.5	7.7
8H	0.5	1.1	0.8	1.4	1.6	6.5	7.1	6.8	7.4	7.7
12H	0.4	1.1	0.7	1.3	1.6	6.4	7.1	6.7	7.3	7.6
4H 2H	0.6	1.3	0.9	1.6	1.8	6.6	7.4	6.9	7.6	7.8
3H	0.4	1.1	0.7	1.3	1.6	6.4	7.1	6.7	7.3	7.6
4H	0.3	0.9	0.7	1.2	1.5	6.3	6.9	6.7	7.2	7.5
6H	0.2	0.7	0.6	1.1	1.4	6.2	6.7	6.6	7.1	7.4
8H	0.2	0.6	0.6	1.0	1.4	6.2	6.7	6.6	7.0	7.4
12H	0.1	0.6	0.5	0.9	1.3	6.1	6.6	6.5	6.9	7.3
8H 4H	0.2	0.6	0.6	1.0	1.4	6.2	6.7	6.6	7.0	7.4
6H	0.1	0.5	0.5	0.8	1.3	6.1	6.5	6.5	6.9	7.3
8H	0.0	0.4	0.5	0.8	1.2	6.0	6.4	6.5	6.8	7.2
12H	-0.1	0.2	0.4	0.7	1.2	6.0	6.3	6.4	6.7	7.2
12H 4H	0.1	0.6	0.5	0.9	1.3	6.1	6.6	6.5	6.9	7.3
6H	0.0	0.4	0.5	0.8	1.2	6.0	6.4	6.5	6.8	7.2
8H	-0.1	0.2	0.4	0.7	1.2	6.0	6.3	6.4	6.7	7.2
Variations with the observer position at spacings:										
S = 1.0H	+ 3.8 / -14.9					+ 5.8 / -15.5				
1.5H	+ 5.9 / - 8.0					+ 8.3 / -12.7				
2.0H	+ 6.2 / -23.5					+ 7.2 / -21.8				

CIE Pub.117 Corrected 7154 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.8)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	81	90	84	81	89	84	81	77
0.80	97	92	89	97	92	88	95	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	99	104	101	98	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

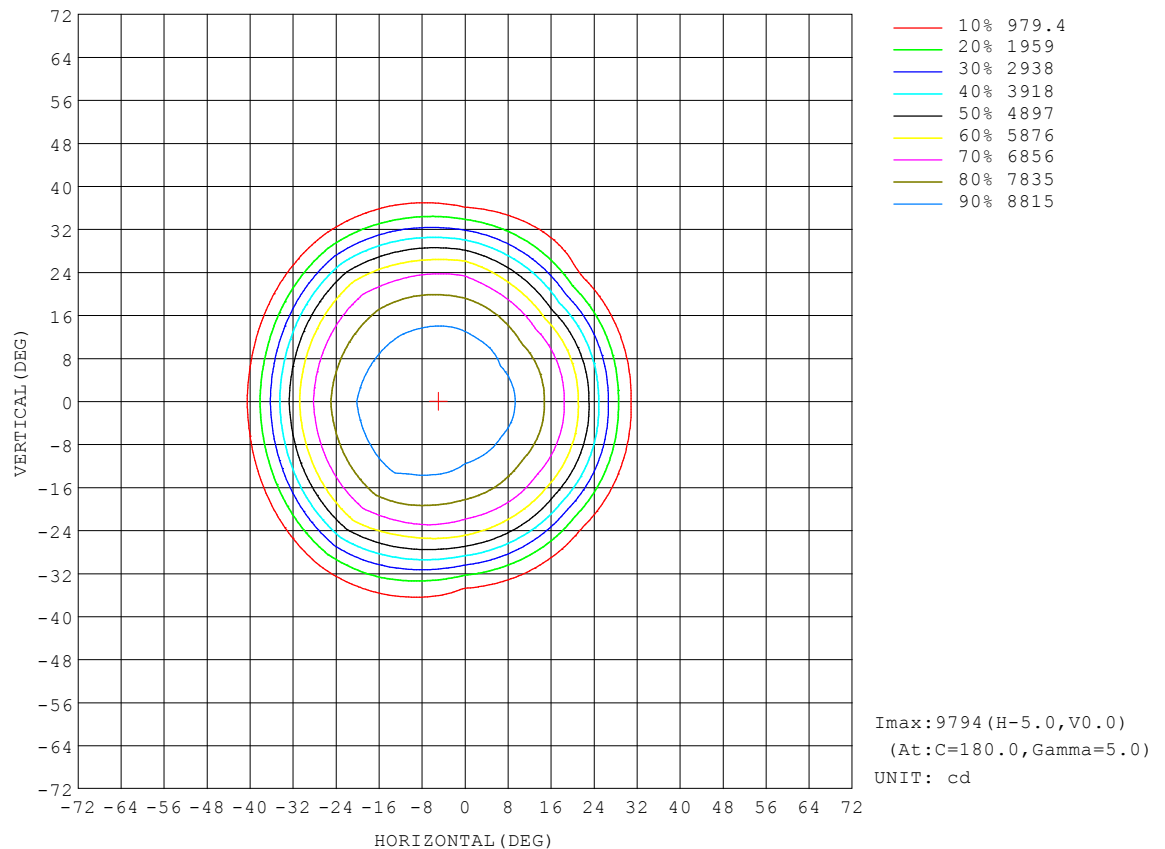


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

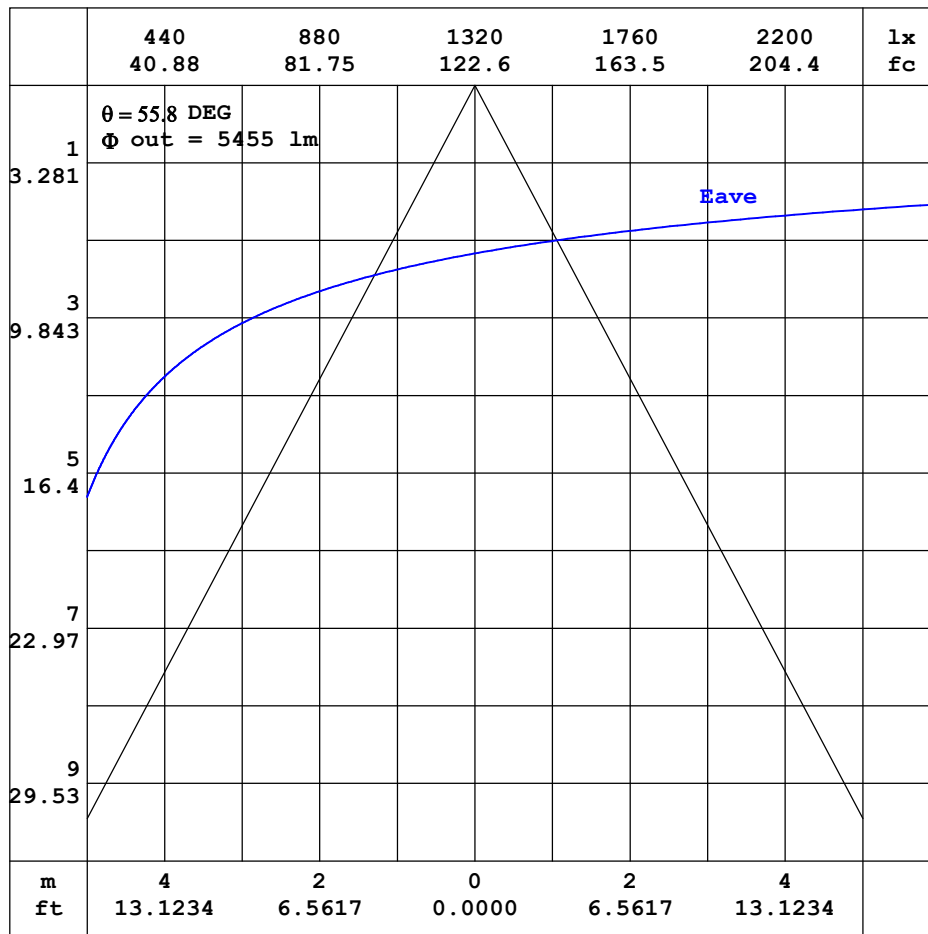


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

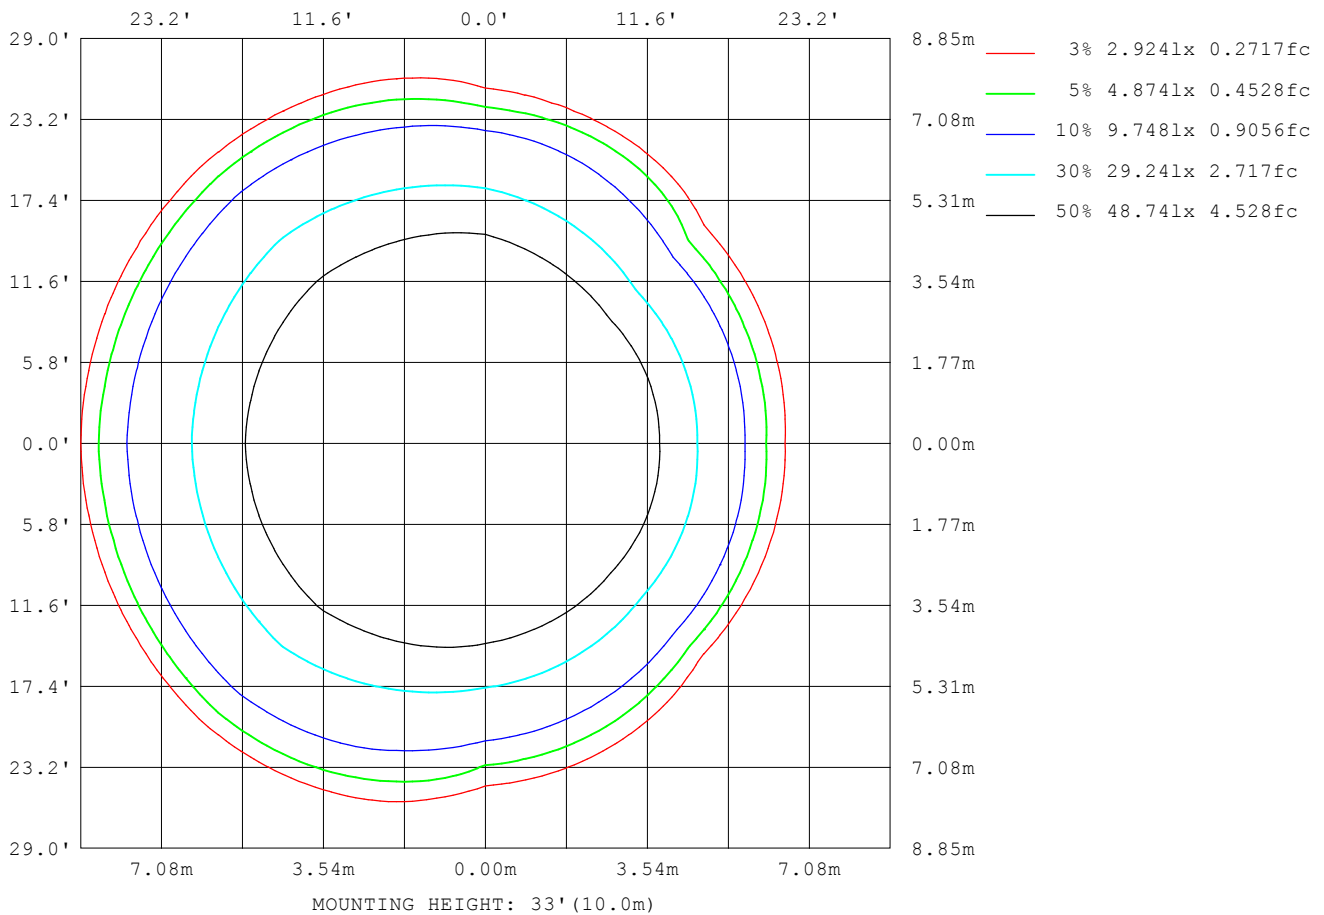

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	62
L_0~180 (75) av	2
L_0~180 (85) av	3
L_90~270 (65) av	7
L_90~270 (75) av	2
L_90~270 (85) av	3
L_45 (65) av	54
L_45 (75) av	2
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

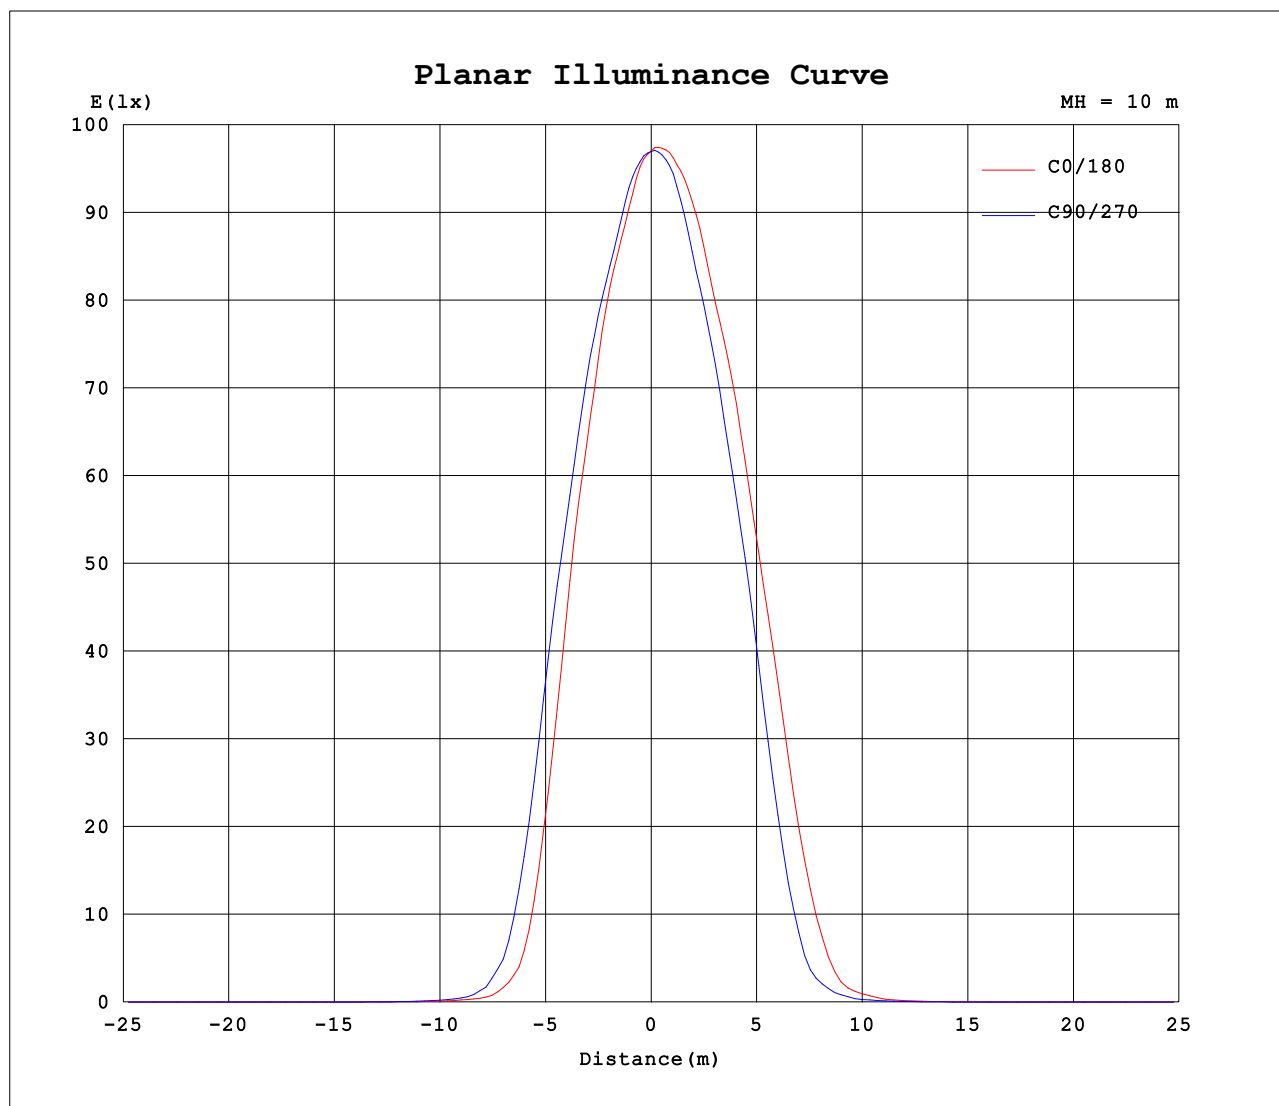

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.5000A P:59.70W PF:0.9930 Freq:60.00Hz Lamp Flux:7154.36x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	9704	9713	9695	9663	9704	9713	9695	9663										
5	9319	9367	9517	9684	9794	9735	9643	9317										
10	8746	8748	8968	9544	9697	9608	9178	8733										
15	7768	7897	8439	9122	9319	9076	8575	7835										
20	6346	6580	7379	8651	8833	8481	7653	6414										
25	3833	4337	5839	7524	7829	7414	6310	3992										
30	1289	1645	3186	5886	6233	5910	3921	1496										
35	311	358	899	3254	3623	3320	1442	368										
40	85.3	93.6	202	947	1158	895	354	94.8										
45	37.0	41.4	71.3	219	276	225	91.5	41.5										
50	15.3	17.4	32.2	71.1	79.7	73.6	39.5	16.8										
55	7.90	8.91	14.5	32.6	35.9	32.2	16.1	8.84										
60	0.55	1.02	7.11	14.8	15.5	14.3	8.34	0.94										
65	0.13	0.12	0.18	7.28	8.13	6.90	0.71	0.11										
70	0.09	0.10	0.12	0.17	0.51	0.17	0.11	0.09										
75	0.07	0.08	0.10	0.12	0.11	0.11	0.08	0.06										
80	0.05	0.06	0.07	0.08	0.08	0.08	0.06	0.05										
85	0.04	0.04	0.06	0.07	0.06	0.06	0.04	0.03										
90	0.04	0.04	0.04	0.05	0.03	0.05	0.02	0.02										
95	0.04	0.03	0.04	0.04	0.03	0.03	0.02	0.02										
100	0.04	0.04	0.04	0.03	0.02	0.02	0.02	0.02										
105	0.04	0.04	0.04	0.03	0.02	0.02	0.02	0.03										
110	0.07	0.07	0.05	0.04	0.02	0.03	0.02	0.03										
115	0.10	0.10	0.06	0.05	0.03	0.04	0.03	0.06										
120	0.27	0.26	0.14	0.07	0.04	0.04	0.06	0.17										
125	0.86	0.86	0.40	0.15	0.07	0.08	0.17	0.49										
130	1.85	1.90	1.18	0.43	0.23	0.26	0.50	1.07										
135	3.01	3.02	2.27	1.23	0.61	0.68	1.09	1.88										
140	4.14	4.11	3.36	2.34	1.27	1.36	1.91	2.82										
145	5.22	5.20	4.51	3.49	2.11	2.23	2.87	3.77										
150	6.17	6.22	5.50	4.59	3.07	3.17	3.87	4.78										
155	7.03	7.25	6.59	5.63	4.01	4.13	4.87	5.76										
160	7.98	8.23	7.61	6.67	4.88	5.10	5.87	6.96										
165	8.96	9.15	8.53	7.66	5.83	6.15	7.10	8.36										
170	9.75	9.83	9.38	8.67	7.12	7.51	8.47	9.48										
175	9.99	10.1	9.93	9.59	8.63	8.93	9.53	10.1										
180	9.75	9.89	10.1	10.1	9.72	9.86	10.0	10.1										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: