


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 116.39 lm/W			
MODEL		I _{max} (cd)	10577	S/MH(C0/180)	0.95
NOMINAL POWER(W)	65W	LOR(%)	100.0	S/MH(C90/270)	0.83
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7693.3	η UP,DN(C0-180)	0.1,53.5
NOMINAL FLUX(lm)	7693.26	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,46.4
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

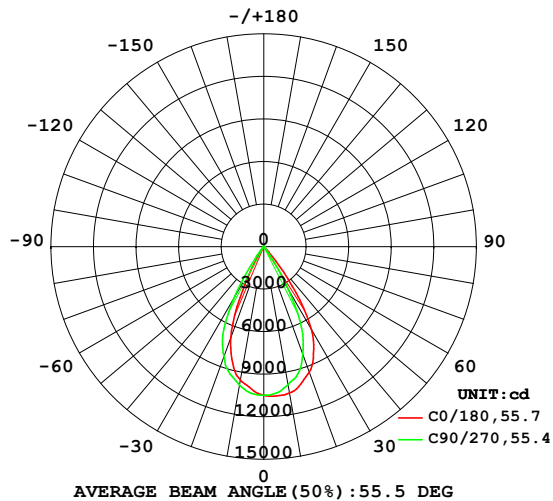

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

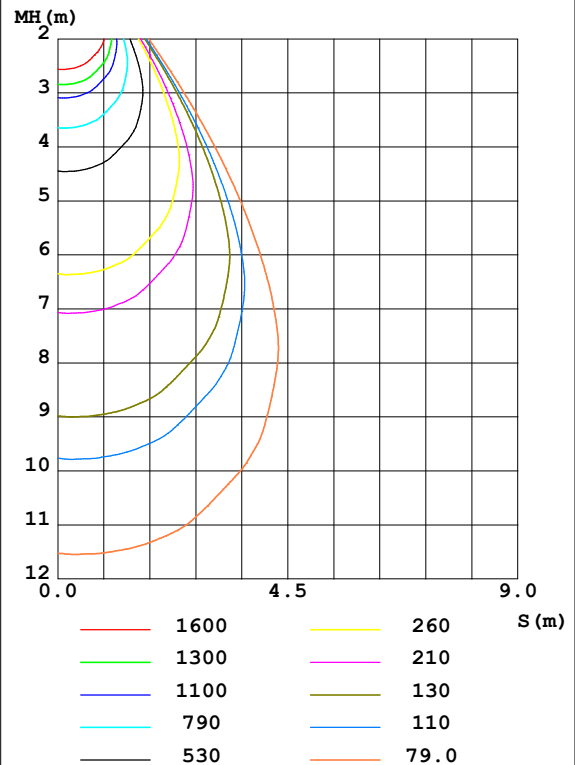

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1047	1019	988.8	979.2	955.2	957.3	991.1	1034	0- 10	975.5	975.5	12.7,12.7
20	941.6	889.2	808.8	758.3	684.6	744.1	823.3	903.0	10- 20	2585	3561	46.3,46.3
30	674.9	561.9	349.2	239.4	139.7	233.1	430.1	564.1	20- 30	2863	6424	83.5,83.5
40	132.3	56.58	21.24	14.95	8.921	13.11	37.74	68.96	30- 40	1118	7542	98,98
50	8.763	5.911	3.489	2.497	1.714	2.445	4.263	6.625	40- 50	119.3	7661	99.6,99.6
60	1.606	1.240	0.7806	0.3091	0.0744	0.3161	0.8926	1.279	50- 60	19.37	7680	99.8,99.8
70	0.0415	0.0152	0.0128	0.0111	0.0085	0.0109	0.0111	0.0133	60- 70	2.707	7683	99.9,99.9
80	0.0097	0.0090	0.0073	0.0063	0.0046	0.0063	0.0061	0.0078	70- 80	0.1036	7683	99.9,99.9
90	0.0063	0.0051	0.0046	0.0036	0.0019	0.0024	0.0022	0.0034	80- 90	0.0577	7683	99.9,99.9
100	0.0041	0.0036	0.0046	0.0041	0.0022	0.0027	0.0027	0.0024	90-100	0.0369	7683	99.9,99.9
110	0.0046	0.0048	0.0053	0.0065	0.0036	0.0034	0.0027	0.0031	100-110	0.0384	7683	99.9,99.9
120	0.0073	0.0080	0.0131	0.0226	0.0233	0.0133	0.0070	0.0048	110-120	0.0667	7684	99.9,99.9
130	0.0307	0.0500	0.1027	0.1620	0.1324	0.0938	0.0512	0.0348	120-130	0.3344	7684	99.9,99.9
140	0.2017	0.2531	0.3271	0.4017	0.3260	0.2638	0.1918	0.1621	130-140	1.278	7685	99.9,99.9
150	0.4519	0.4863	0.5483	0.6199	0.5236	0.4530	0.3880	0.3551	140-150	2.313	7687	99.9,99.9
160	0.6728	0.6947	0.7474	0.8183	0.7395	0.6556	0.5766	0.5513	150-160	2.655	7690	100,100
170	0.8953	0.9054	0.9622	1.022	1.020	0.9528	0.8421	0.8103	160-170	2.235	7692	100,100
180	1.094	1.054	1.034	1.057	1.086	1.033	1.028	1.048	170-180	0.9445	7693	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

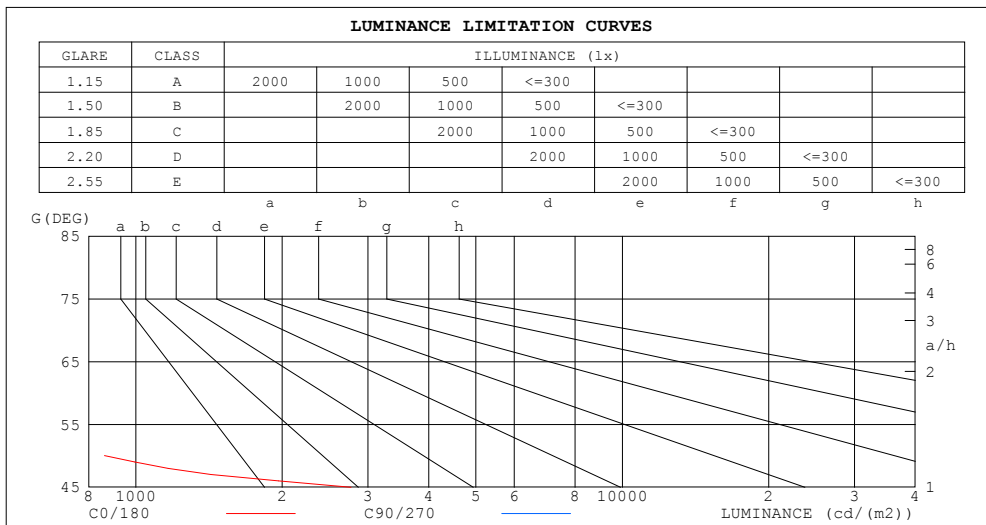

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6	4
80	4	3
75	3	2
70	8	2
65	122	3
60	203	99
55	429	174
50	863	344
45	2771	678


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.98	1.03	.99	.97	.90	.97	.94	.97	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.77	.73	.82	.77	.73	.80	.76	.72	.79	.75	.72	.78	.74	.71	.70
7.0	.78	.73	.69	.78	.72	.69	.76	.72	.68	.75	.71	.68	.74	.70	.68	.66
8.0	.74	.69	.65	.74	.68	.65	.73	.68	.65	.72	.67	.64	.71	.67	.64	.63
9.0	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.64	.61	.59
10.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.64	.61	.58	.56

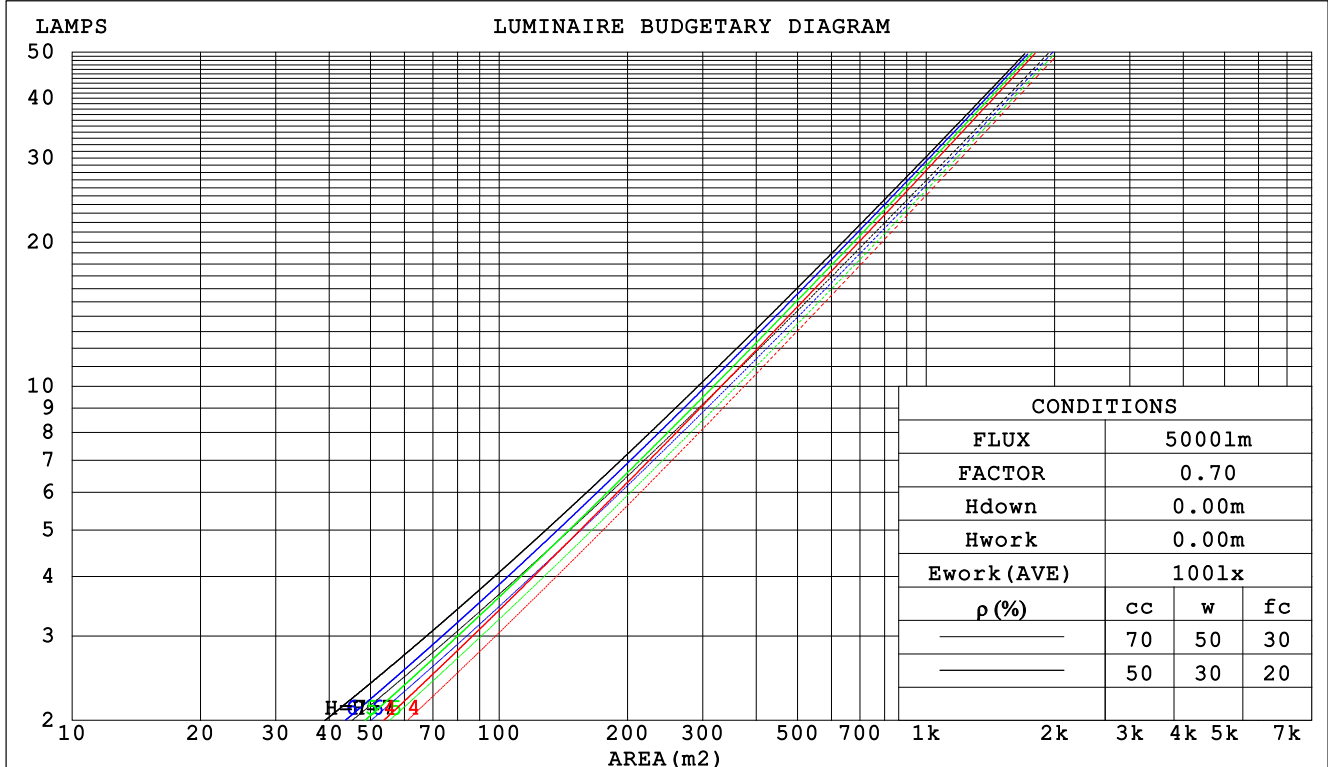

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm					
NAME: WL-2CLD8IN60WB5D3HVWH			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 8IN		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.165	.094	.030	.158	.090	.029	.146	.084	.027	.134	.077	.025	.123	.072	.023		
2.0	.157	.086	.026	.151	.083	.026	.141	.078	.024	.131	.073	.023	.122	.069	.022		
3.0	.149	.079	.024	.144	.077	.023	.135	.073	.022	.127	.070	.021	.119	.066	.020		
4.0	.142	.074	.022	.138	.072	.021	.130	.069	.021	.123	.066	.020	.116	.063	.019		
5.0	.135	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.113	.060	.018		
6.0	.129	.065	.019	.126	.064	.018	.120	.062	.018	.115	.060	.018	.110	.058	.017		
7.0	.124	.061	.017	.121	.060	.017	.116	.059	.017	.111	.057	.017	.107	.055	.016		
8.0	.119	.058	.016	.117	.057	.016	.112	.056	.016	.108	.054	.016	.104	.053	.015		
9.0	.114	.055	.015	.112	.055	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015		
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.101	.050	.014	.097	.049	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.158	.147	.147	.136	.126	.100	.094	.087	.058	.054	.051	.018	.017	.016	
2.0	.155	.134	.115	.133	.115	.100	.091	.080	.070	.053	.046	.041	.017	.015	.013	
3.0	.142	.114	.092	.122	.099	.080	.084	.069	.056	.048	.040	.033	.016	.013	.011	
4.0	.131	.100	.075	.113	.086	.065	.078	.060	.046	.045	.035	.027	.014	.011	.009	
5.0	.122	.088	.062	.105	.076	.054	.072	.053	.038	.042	.031	.023	.014	.010	.007	
6.0	.115	.078	.052	.099	.068	.046	.068	.048	.032	.039	.028	.019	.013	.009	.006	
7.0	.108	.071	.044	.093	.061	.039	.064	.043	.027	.037	.025	.016	.012	.008	.005	
8.0	.102	.064	.038	.088	.056	.033	.061	.039	.024	.035	.023	.014	.011	.008	.005	
9.0	.097	.059	.033	.084	.051	.029	.058	.036	.021	.034	.021	.012	.011	.007	.004	
10.0	.093	.055	.029	.080	.047	.026	.056	.033	.018	.032	.020	.011	.011	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm										
NAME: WL-2CLD8IN60WB5D3HVWH					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 8IN			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.5	16.4	15.7	16.5	16.7	11.1	12.0	11.3	12.2	12.3
3H	15.3	16.1	15.6	16.3	16.5	11.0	11.8	11.2	11.9	12.1
4H	15.2	16.0	15.5	16.2	16.4	10.9	11.6	11.1	11.8	12.1
6H	15.2	15.9	15.4	16.1	16.3	10.8	11.5	11.1	11.7	12.0
8H	15.1	15.8	15.4	16.0	16.3	10.7	11.4	11.0	11.7	11.9
12H	15.1	15.7	15.4	16.0	16.3	10.7	11.3	11.0	11.6	11.9
4H 2H	15.2	16.0	15.5	16.2	16.4	10.9	11.6	11.1	11.8	12.1
3H	15.1	15.7	15.4	16.0	16.3	10.7	11.3	11.0	11.6	11.9
4H	15.0	15.6	15.3	15.9	16.2	10.6	11.2	10.9	11.5	11.8
6H	14.9	15.4	15.2	15.7	16.1	10.5	11.0	10.9	11.4	11.7
8H	14.8	15.3	15.2	15.6	16.0	10.4	10.9	10.8	11.3	11.6
12H	14.8	15.2	15.2	15.6	16.0	10.4	10.8	10.8	11.2	11.6
8H 4H	14.8	15.3	15.2	15.6	16.0	10.4	10.9	10.8	11.3	11.6
6H	14.7	15.1	15.1	15.5	15.9	10.3	10.7	10.8	11.1	11.5
8H	14.7	15.0	15.1	15.4	15.9	10.3	10.6	10.7	11.1	11.5
12H	14.6	14.9	15.1	15.3	15.8	10.2	10.5	10.7	11.0	11.4
12H 4H	14.8	15.2	15.2	15.6	16.0	10.4	10.8	10.8	11.2	11.6
6H	14.7	15.0	15.1	15.4	15.9	10.3	10.6	10.7	11.1	11.5
8H	14.6	14.9	15.1	15.3	15.8	10.2	10.5	10.7	11.0	11.4
Variations with the observer position at spacings:										
S = 1.0H	+ 5.2 / -20.6					+ 3.3 / -15.9				
1.5H	+ 7.9 / -17.8					+ 5.8 / -11.4				
2.0H	+ 8.6 / -11.4					+ 5.5 / - 9.6				

CIE Pub.117 Corrected 7693 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	85	81	90	84	81	89	84	81	78
0.80	97	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	114	112	113	112	110	110	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

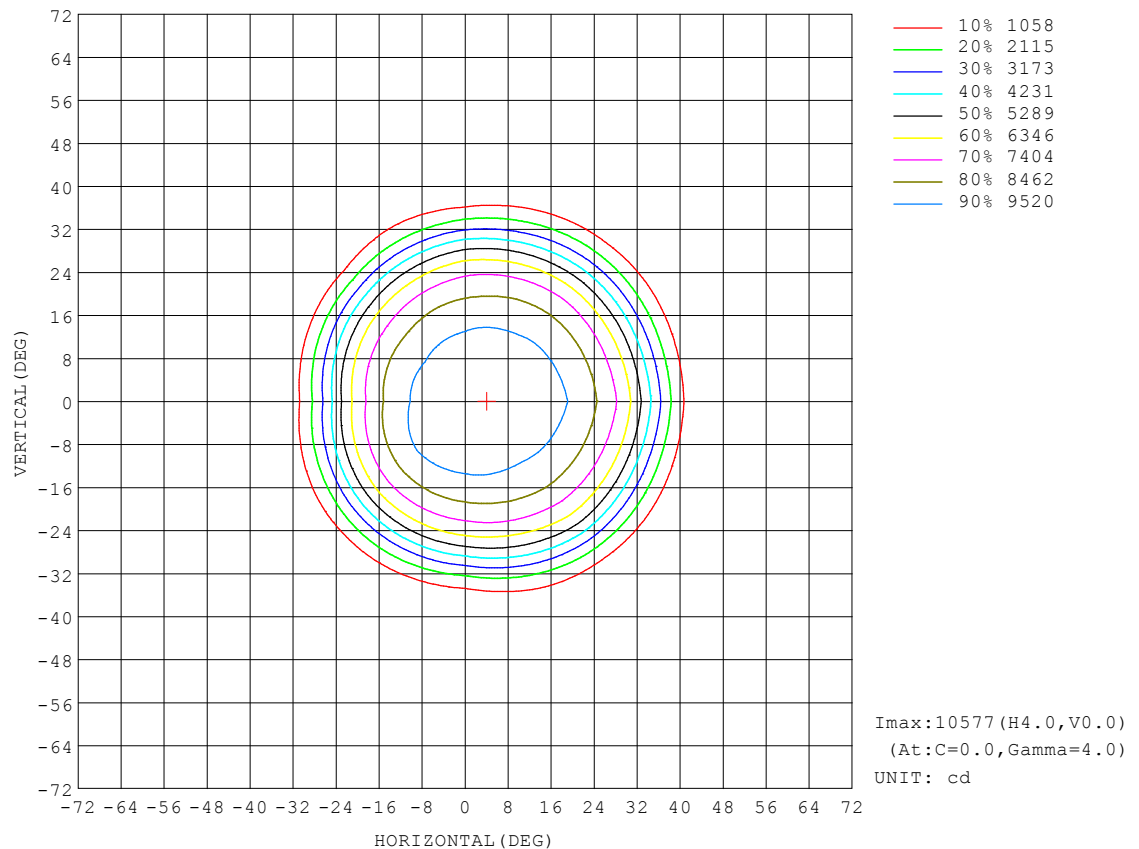


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

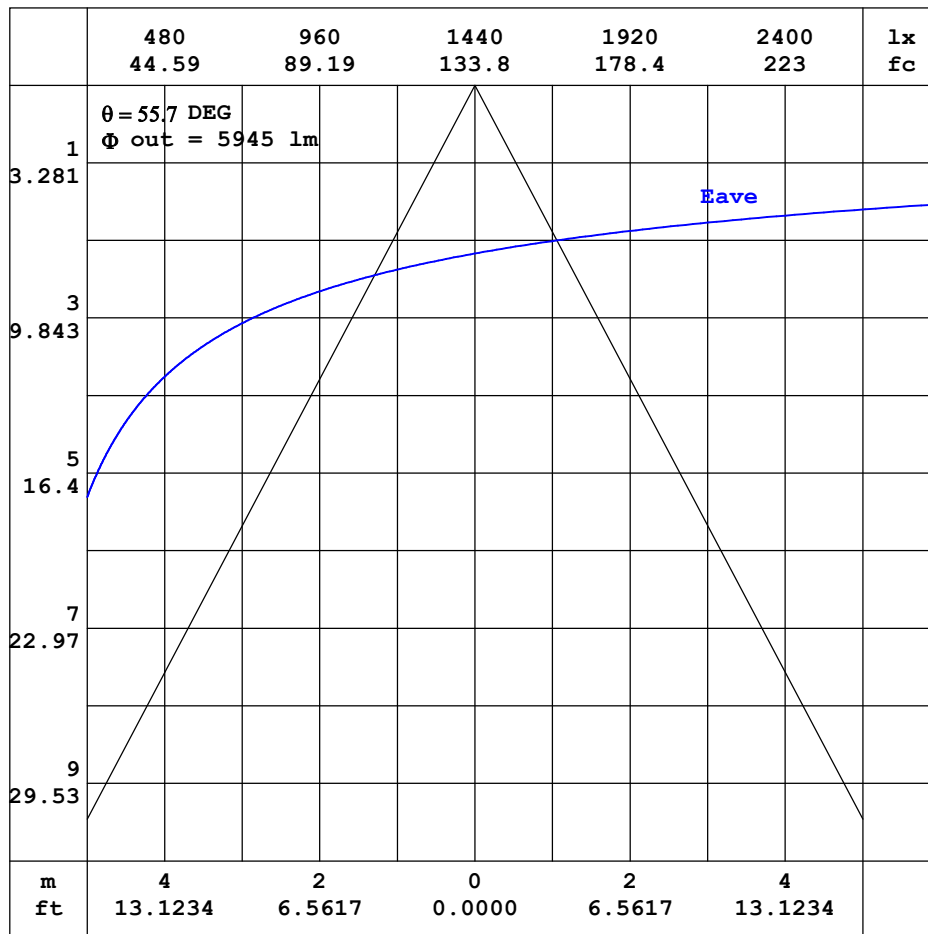


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

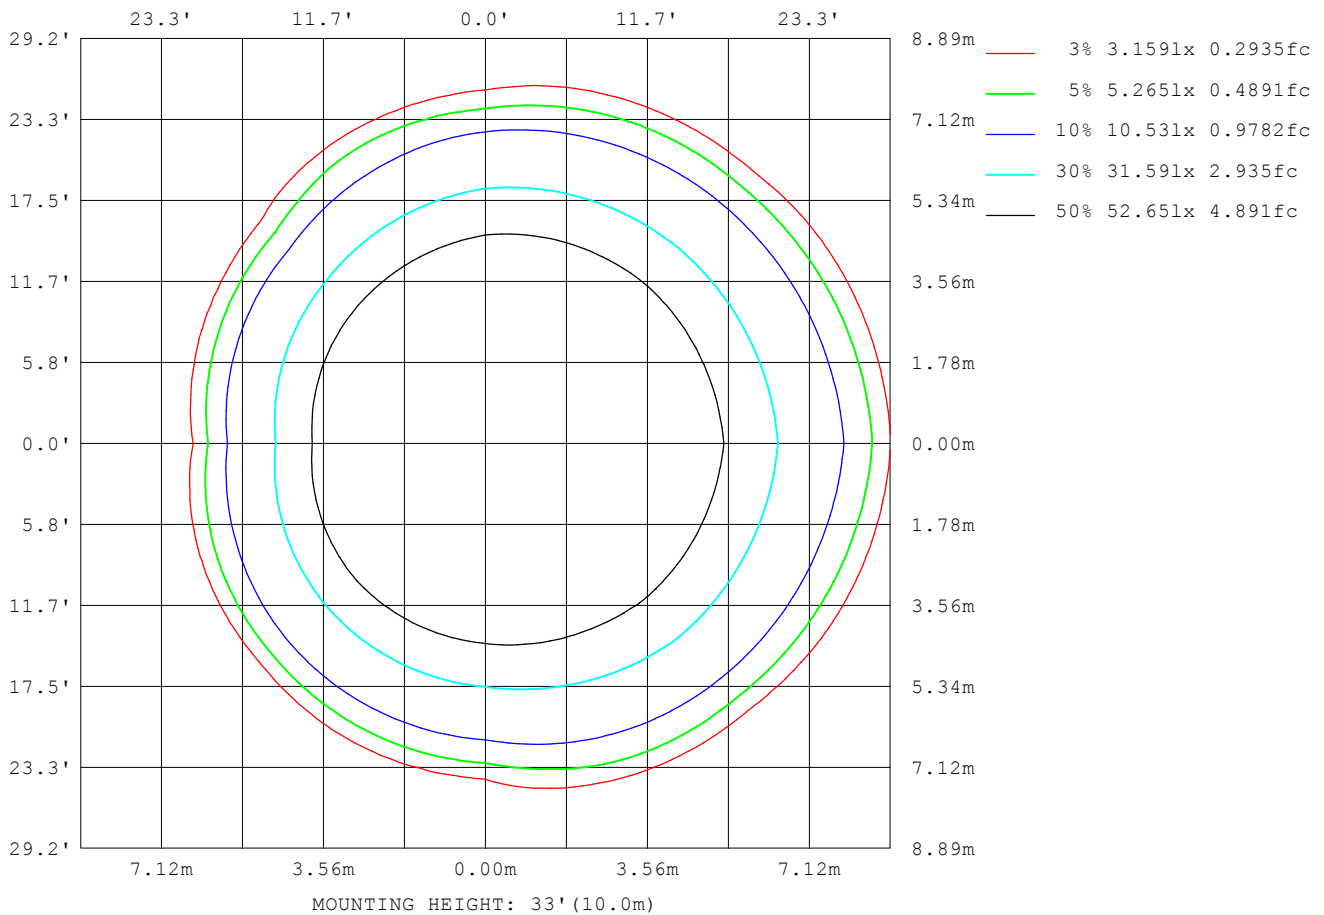

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm		
NAME: WL-2CLD8IN60WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	62
L_0~180 (75) av	2
L_0~180 (85) av	4
L_90~270 (65) av	7
L_90~270 (75) av	2
L_90~270 (85) av	3
L_45 (65) av	28
L_45 (75) av	2
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

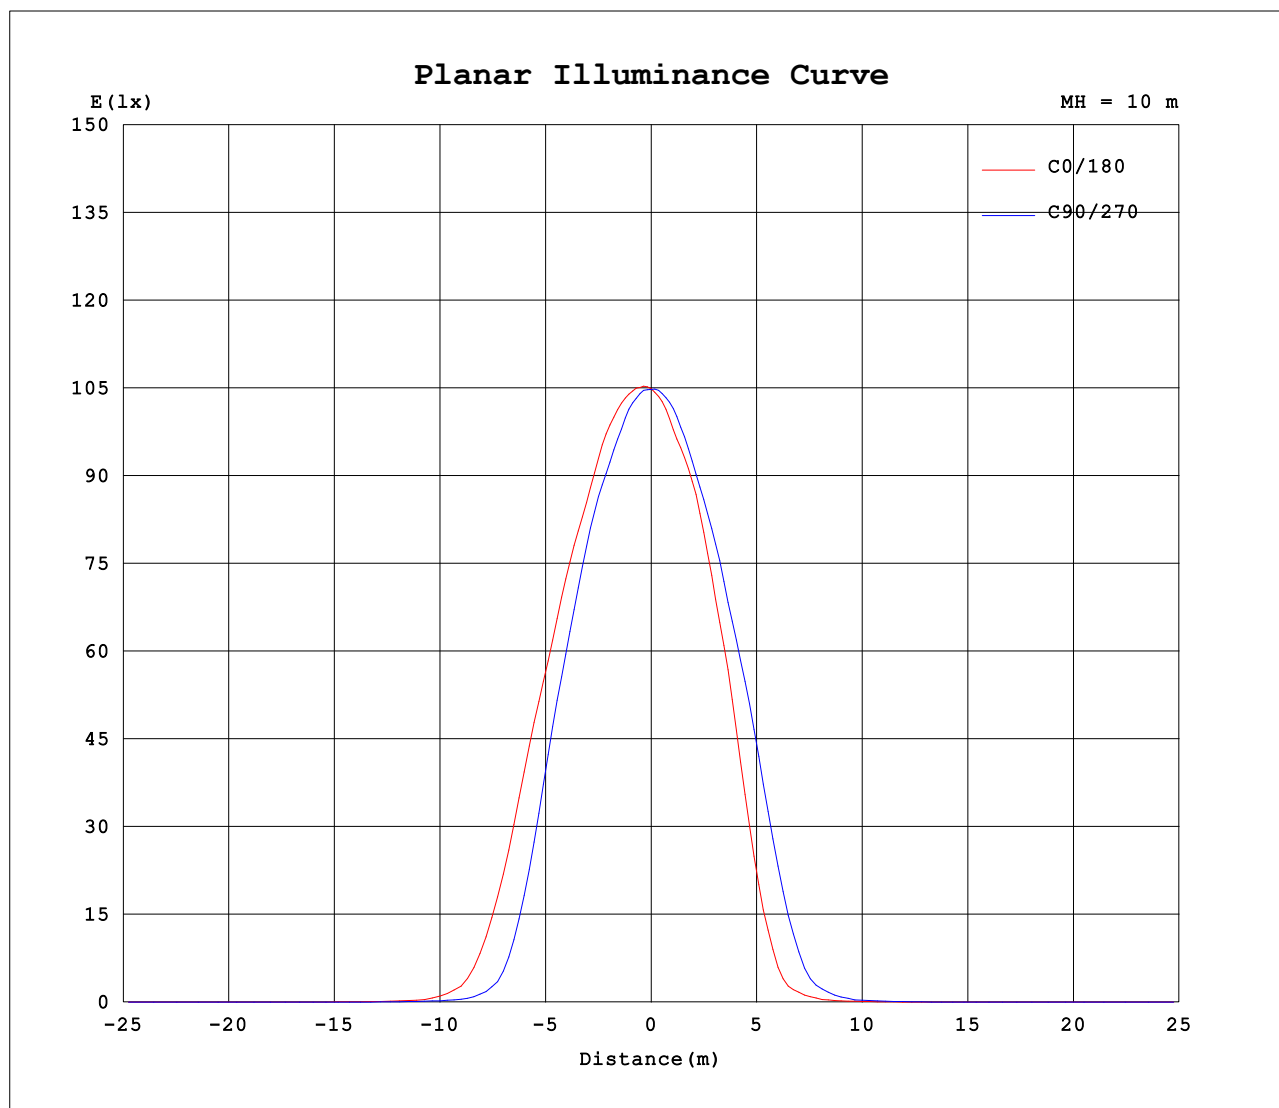

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.5550A P:66.10W PF:0.9920 Freq:60.00Hz Lamp Flux:7693.26x1 lm								
NAME: WL-2CLD8IN60WB5D3HVWH					TYPE:4000K			WEIGHT:
SPEC.:					DIM.: 8IN			SERIAL No.:
MFR.: WS					SUR.:0.0505*3.1415			Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1049	1047	1048	1050	1049	1047	1048	1050										
5	1057	1048	1036	1028	1009	1015	1037	1050										
10	1047	1019	989	979	955	957	991	1034										
15	1004	957	931	911	852	881	927	968										
20	942	889	809	758	685	744	823	903										
25	832	757	633	532	405	529	685	776										
30	675	562	349	239	140	233	430	564										
35	398	263	97.2	49.5	31.3	54.0	157	282										
40	132	56.6	21.2	15.0	8.92	13.1	37.7	69.0										
45	31.0	16.6	7.58	5.60	4.02	5.77	9.93	16.0										
50	8.76	5.91	3.49	2.50	1.71	2.45	4.26	6.62										
55	3.89	2.60	1.57	1.24	0.91	1.22	1.73	2.70										
60	1.61	1.24	0.78	0.31	0.07	0.32	0.89	1.28										
65	0.82	0.34	0.02	0.01	0.01	0.01	0.07	0.38										
70	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.01										
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01										
80	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01										
85	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01										
90	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00										
120	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.00										
125	0.01	0.02	0.04	0.07	0.06	0.04	0.02	0.01										
130	0.03	0.05	0.10	0.16	0.13	0.09	0.05	0.03										
135	0.09	0.14	0.21	0.28	0.22	0.17	0.11	0.09										
140	0.20	0.25	0.33	0.40	0.33	0.26	0.19	0.16										
145	0.33	0.37	0.44	0.51	0.43	0.36	0.29	0.26										
150	0.45	0.49	0.55	0.62	0.52	0.45	0.39	0.36										
155	0.57	0.59	0.65	0.72	0.62	0.55	0.49	0.45										
160	0.67	0.69	0.75	0.82	0.74	0.66	0.58	0.55										
165	0.77	0.80	0.85	0.93	0.89	0.80	0.69	0.66										
170	0.90	0.91	0.96	1.02	1.02	0.95	0.84	0.81										
175	1.01	1.00	1.03	1.07	1.09	1.04	0.97	0.96										
180	1.09	1.05	1.03	1.06	1.09	1.03	1.03	1.05										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: