


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.60 lm/W			
MODEL		I _{max} (cd)	10925	S/MH(C0/180)	0.96
NOMINAL POWER(W)	70W	LOR(%)	100.0	S/MH(C90/270)	0.83
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7953.0	η UP,DN(C0-180)	0.1,53.5
NOMINAL FLUX(lm)	7953.04	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,46.3
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

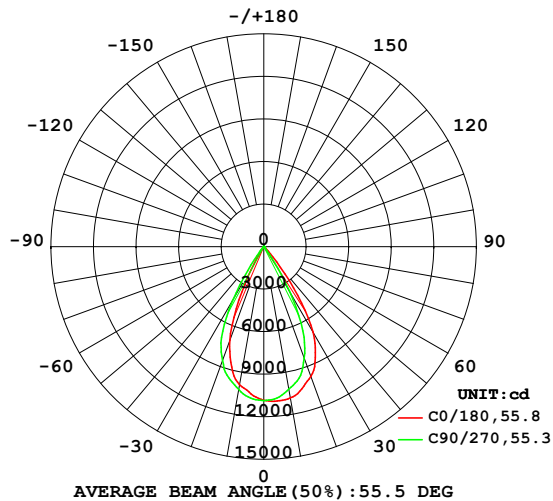

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

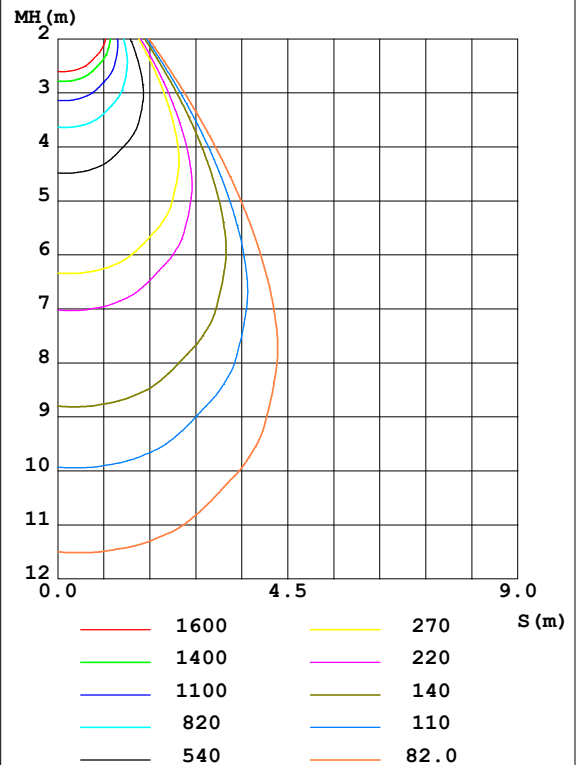

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1082	1053	1021	1011	989.1	988.1	1023	1068	0- 10	1008	1008	12.7,12.7
20	973.7	919.4	836.8	782.8	703.8	767.9	851.0	934.5	10- 20	2671	3679	46.3,46.3
30	696.0	582.9	361.9	246.9	143.3	239.1	442.9	582.9	20- 30	2958	6637	83.5,83.5
40	141.0	58.76	22.29	15.47	9.194	13.49	39.10	71.67	30- 40	1159	7796	98,98
50	9.165	6.096	3.617	2.576	1.769	2.525	4.383	6.847	40- 50	123.5	7920	99.6,99.6
60	1.656	1.284	0.8097	0.3188	0.0768	0.3251	0.9206	1.319	50- 60	20.06	7940	99.8,99.8
70	0.0471	0.0153	0.0138	0.0111	0.0099	0.0107	0.0123	0.0141	60- 70	2.802	7943	99.9,99.9
80	0.0119	0.0087	0.0080	0.0068	0.0053	0.0063	0.0070	0.0082	70- 80	0.1092	7943	99.9,99.9
90	0.0068	0.0051	0.0051	0.0036	0.0027	0.0031	0.0029	0.0041	80- 90	0.0613	7943	99.9,99.9
100	0.0051	0.0041	0.0051	0.0039	0.0036	0.0029	0.0032	0.0024	90-100	0.0402	7943	99.9,99.9
110	0.0051	0.0046	0.0053	0.0065	0.0044	0.0041	0.0034	0.0027	100-110	0.0412	7943	99.9,99.9
120	0.0077	0.0085	0.0133	0.0235	0.0250	0.0135	0.0068	0.0056	110-120	0.0703	7943	99.9,99.9
130	0.0317	0.0505	0.1054	0.1715	0.1383	0.0987	0.0539	0.0360	120-130	0.3502	7943	99.9,99.9
140	0.2116	0.2567	0.3402	0.4204	0.3386	0.2759	0.2039	0.1679	130-140	1.331	7945	99.9,99.9
150	0.4705	0.4964	0.5662	0.6502	0.5422	0.4731	0.4105	0.3668	140-150	2.407	7947	99.9,99.9
160	0.6982	0.7139	0.7786	0.8582	0.7693	0.6673	0.6050	0.5646	150-160	2.756	7950	100,100
170	0.9210	0.9285	0.9947	1.060	1.063	0.9591	0.8705	0.8265	160-170	2.309	7952	100,100
180	1.127	1.080	1.084	1.098	1.127	1.084	1.066	1.086	170-180	0.9723	7953	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

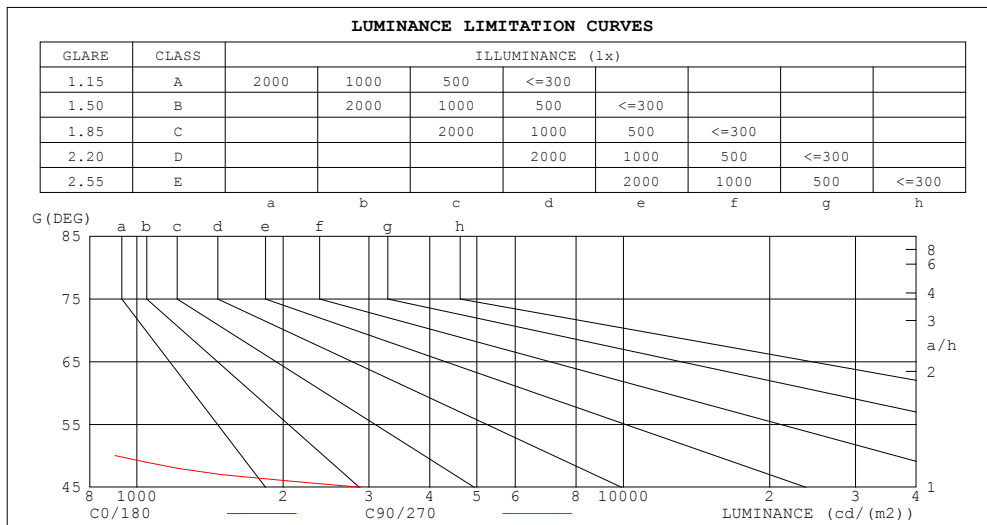

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7	5
80	4	3
75	3	3
70	9	3
65	126	3
60	210	102
55	447	179
50	902	356
45	2886	701


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.98	1.03	.99	.97	.90	.97	.94	.97	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84
4.0	.93	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.81	.78	.76	.74
6.0	.83	.77	.73	.82	.77	.73	.80	.76	.72	.79	.75	.72	.78	.74	.71	.70
7.0	.78	.73	.69	.78	.72	.69	.76	.72	.68	.75	.71	.68	.74	.70	.68	.66
8.0	.74	.69	.65	.74	.68	.65	.73	.68	.65	.72	.67	.64	.71	.67	.64	.63
9.0	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.64	.61	.59
10.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.64	.61	.58	.56

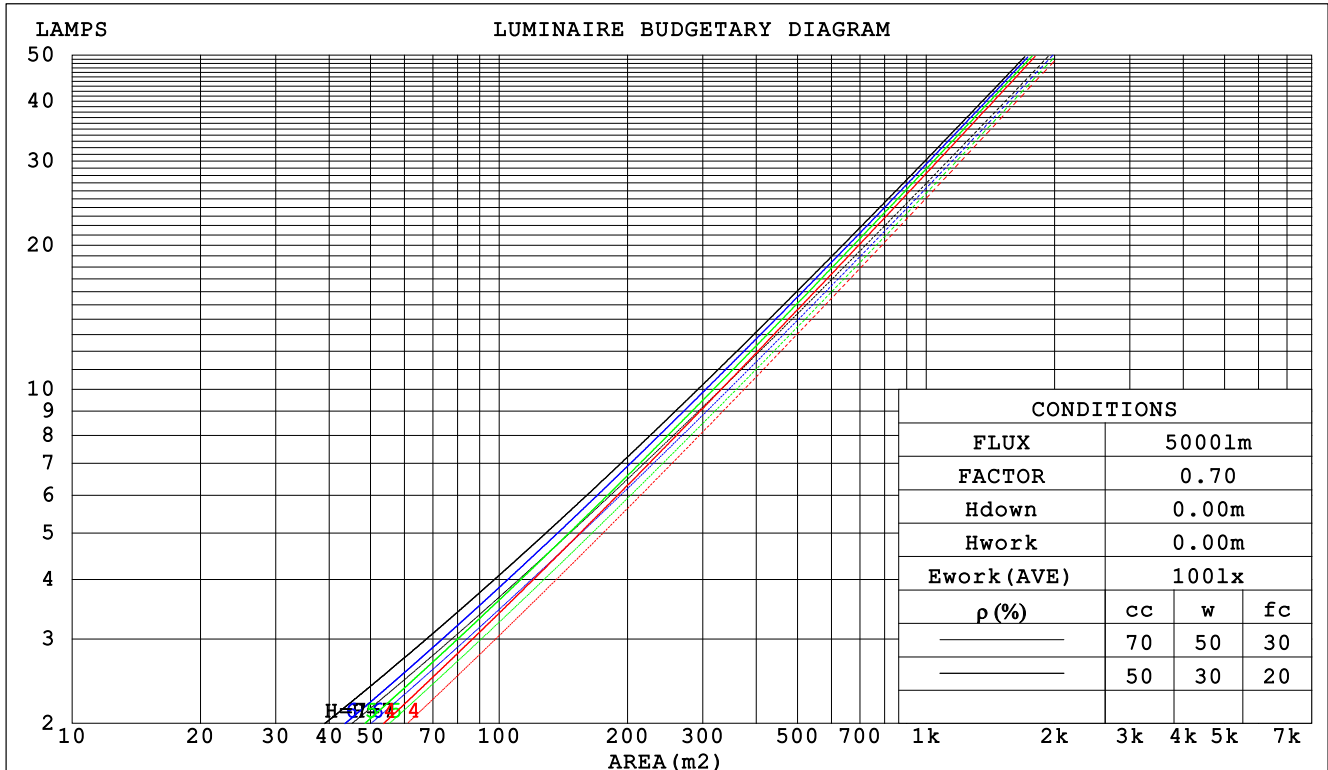

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm					
NAME: WL-2CLD8IN70WB5D3HVWH			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 8IN		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.165	.094	.030	.158	.090	.029	.146	.084	.027	.134	.077	.025	.124	.072	.023		
2.0	.157	.086	.026	.151	.083	.026	.141	.078	.024	.131	.074	.023	.122	.069	.022		
3.0	.149	.079	.024	.144	.077	.023	.135	.073	.022	.127	.070	.021	.119	.066	.020		
4.0	.142	.074	.022	.138	.072	.021	.130	.069	.021	.123	.066	.020	.116	.063	.019		
5.0	.135	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.113	.060	.018		
6.0	.129	.065	.019	.126	.064	.018	.121	.062	.018	.115	.060	.018	.110	.058	.017		
7.0	.124	.061	.017	.121	.060	.017	.116	.059	.017	.111	.057	.017	.107	.055	.016		
8.0	.119	.058	.016	.117	.057	.016	.112	.056	.016	.108	.055	.016	.104	.053	.015		
9.0	.114	.055	.015	.112	.055	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015		
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.101	.050	.014	.097	.049	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.158	.147	.147	.136	.126	.100	.094	.087	.058	.054	.051	.018	.017	.016	
2.0	.155	.134	.115	.133	.115	.100	.091	.080	.070	.053	.046	.041	.017	.015	.013	
3.0	.142	.114	.092	.122	.099	.080	.084	.069	.056	.048	.040	.033	.016	.013	.011	
4.0	.131	.100	.075	.113	.086	.065	.078	.060	.046	.045	.035	.027	.014	.011	.009	
5.0	.122	.088	.062	.105	.076	.054	.072	.053	.038	.042	.031	.023	.014	.010	.007	
6.0	.115	.078	.052	.099	.068	.046	.068	.048	.032	.039	.028	.019	.013	.009	.006	
7.0	.108	.071	.044	.093	.061	.039	.064	.043	.027	.037	.025	.016	.012	.008	.005	
8.0	.102	.064	.038	.088	.056	.033	.061	.039	.024	.036	.023	.014	.011	.008	.005	
9.0	.097	.059	.033	.084	.051	.029	.058	.036	.021	.034	.021	.012	.011	.007	.004	
10.0	.093	.055	.029	.080	.048	.026	.056	.033	.018	.032	.020	.011	.011	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm										
NAME: WL-2CLD8IN70WB5D3HVWH					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 8IN			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.6	16.5	15.9	16.7	16.8	11.2	12.1	11.5	12.3	12.4
3H	15.5	16.3	15.7	16.5	16.7	11.1	11.9	11.3	12.1	12.3
4H	15.4	16.1	15.7	16.4	16.6	11.0	11.7	11.3	12.0	12.2
6H	15.3	16.0	15.6	16.2	16.5	10.9	11.6	11.2	11.8	12.1
8H	15.3	15.9	15.6	16.2	16.4	10.9	11.5	11.2	11.8	12.0
12H	15.2	15.9	15.5	16.1	16.4	10.8	11.5	11.1	11.7	12.0
4H 2H	15.4	16.1	15.7	16.4	16.6	11.0	11.7	11.3	12.0	12.2
3H	15.2	15.9	15.5	16.1	16.4	10.8	11.5	11.1	11.7	12.0
4H	15.1	15.7	15.5	16.0	16.3	10.7	11.3	11.1	11.6	11.9
6H	15.0	15.5	15.4	15.9	16.2	10.6	11.1	11.0	11.5	11.8
8H	15.0	15.4	15.4	15.8	16.2	10.6	11.0	11.0	11.4	11.8
12H	14.9	15.3	15.3	15.7	16.1	10.5	11.0	10.9	11.3	11.7
8H 4H	15.0	15.4	15.4	15.8	16.2	10.6	11.0	11.0	11.4	11.8
6H	14.9	15.3	15.3	15.6	16.1	10.5	10.9	10.9	11.2	11.7
8H	14.8	15.1	15.2	15.6	16.0	10.4	10.8	10.9	11.2	11.6
12H	14.7	15.0	15.2	15.5	16.0	10.3	10.6	10.8	11.1	11.6
12H 4H	14.9	15.3	15.3	15.7	16.1	10.5	11.0	10.9	11.3	11.7
6H	14.8	15.1	15.2	15.6	16.0	10.4	10.8	10.9	11.2	11.6
8H	14.7	15.0	15.2	15.5	16.0	10.3	10.6	10.8	11.1	11.6
Variations with the observer position at spacings:										
S = 1.0H	+ 5.2 / -20.7					+ 3.3 / -16.1				
1.5H	+ 7.9 / -17.9					+ 5.8 / -11.6				
2.0H	+ 8.7 / -11.5					+ 5.5 / - 9.6				

CIE Pub.117 Corrected 7953 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	85	81	90	84	81	89	84	81	78
0.80	97	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	114	112	113	112	110	110	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

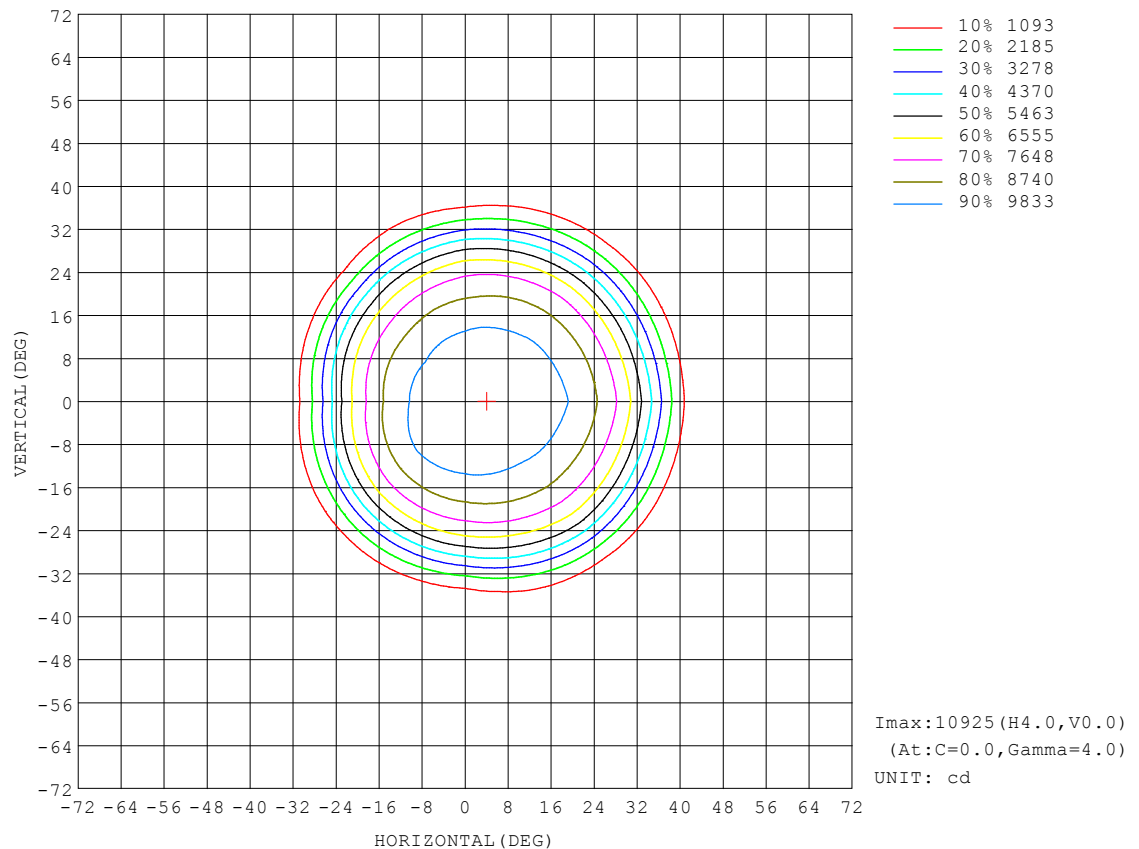


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

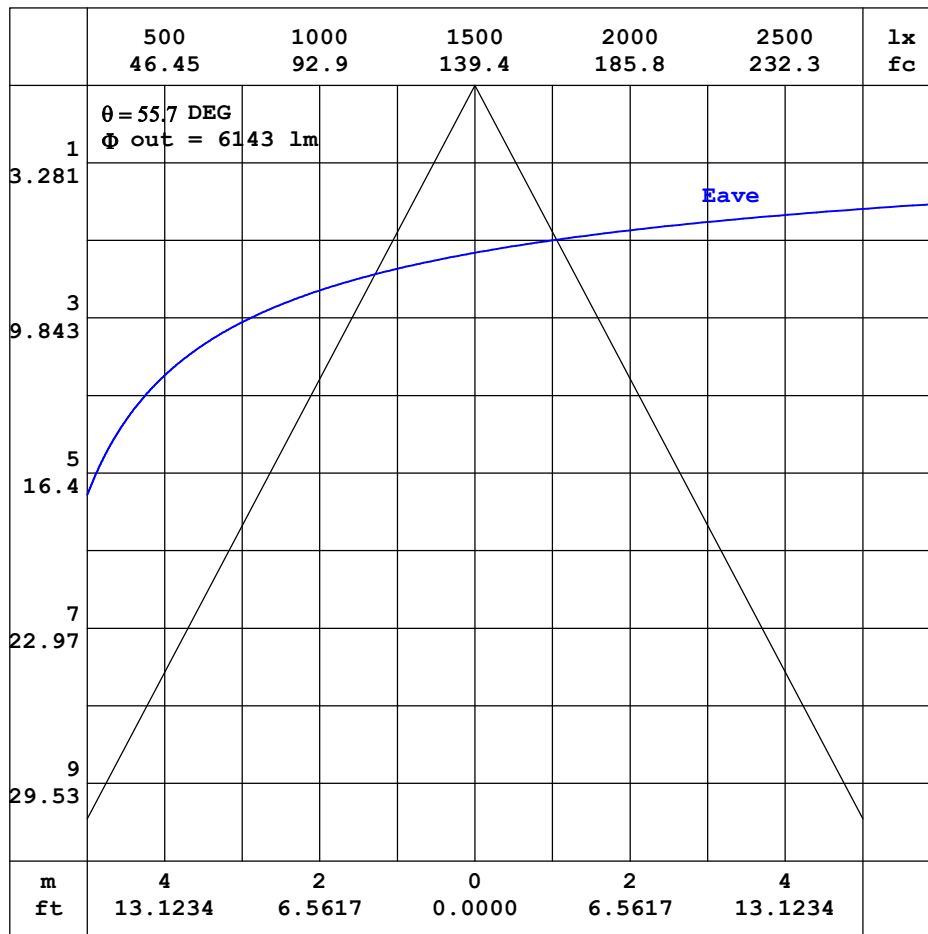


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:

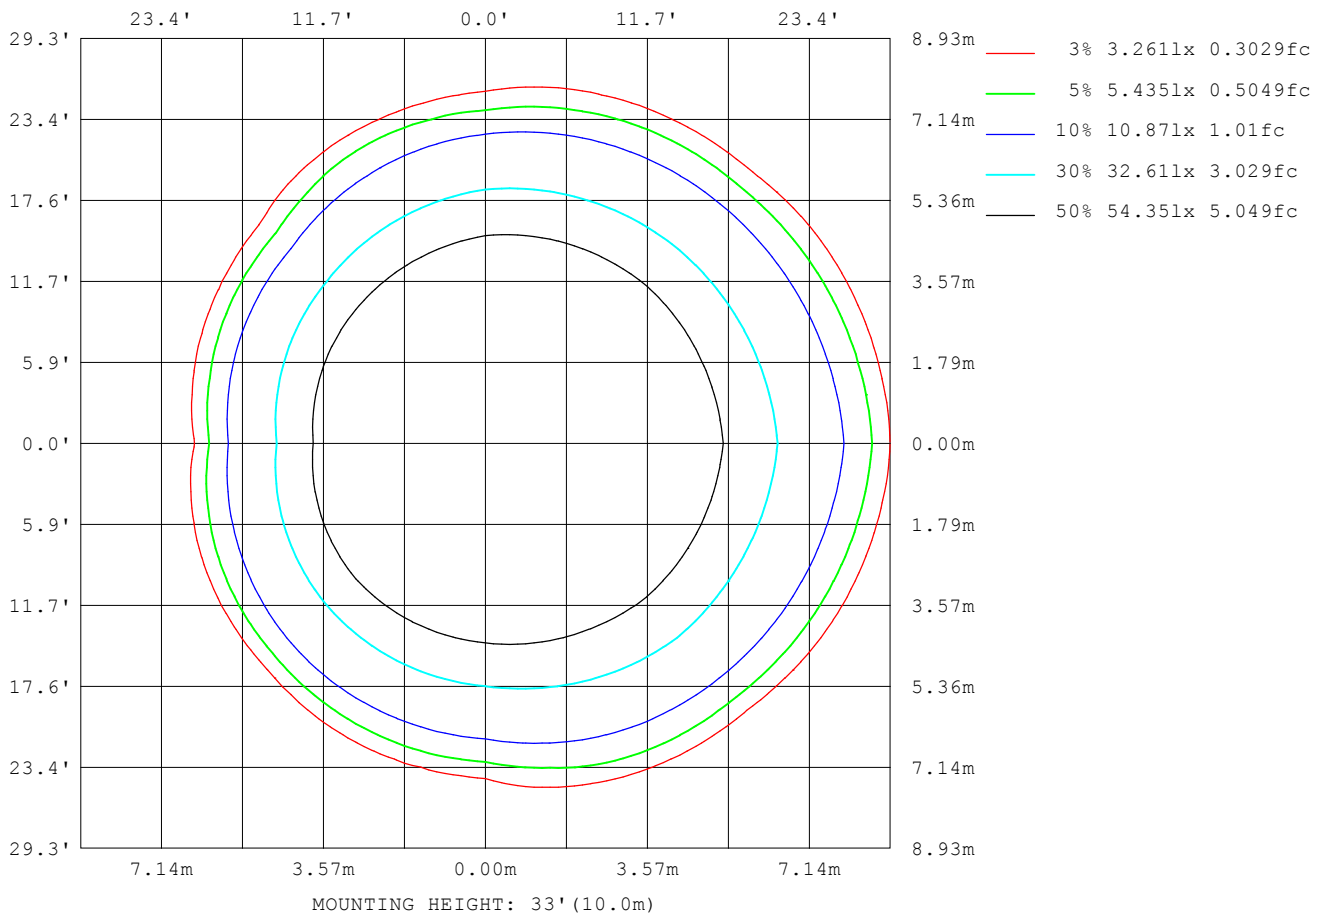

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm		
NAME: WL-2CLD8IN70WB5D3HVWH	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 8IN	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	64
L_0~180 (75) av	3
L_0~180 (85) av	4
L_90~270 (65) av	7
L_90~270 (75) av	2
L_90~270 (85) av	4
L_45 (65) av	29
L_45 (75) av	2
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

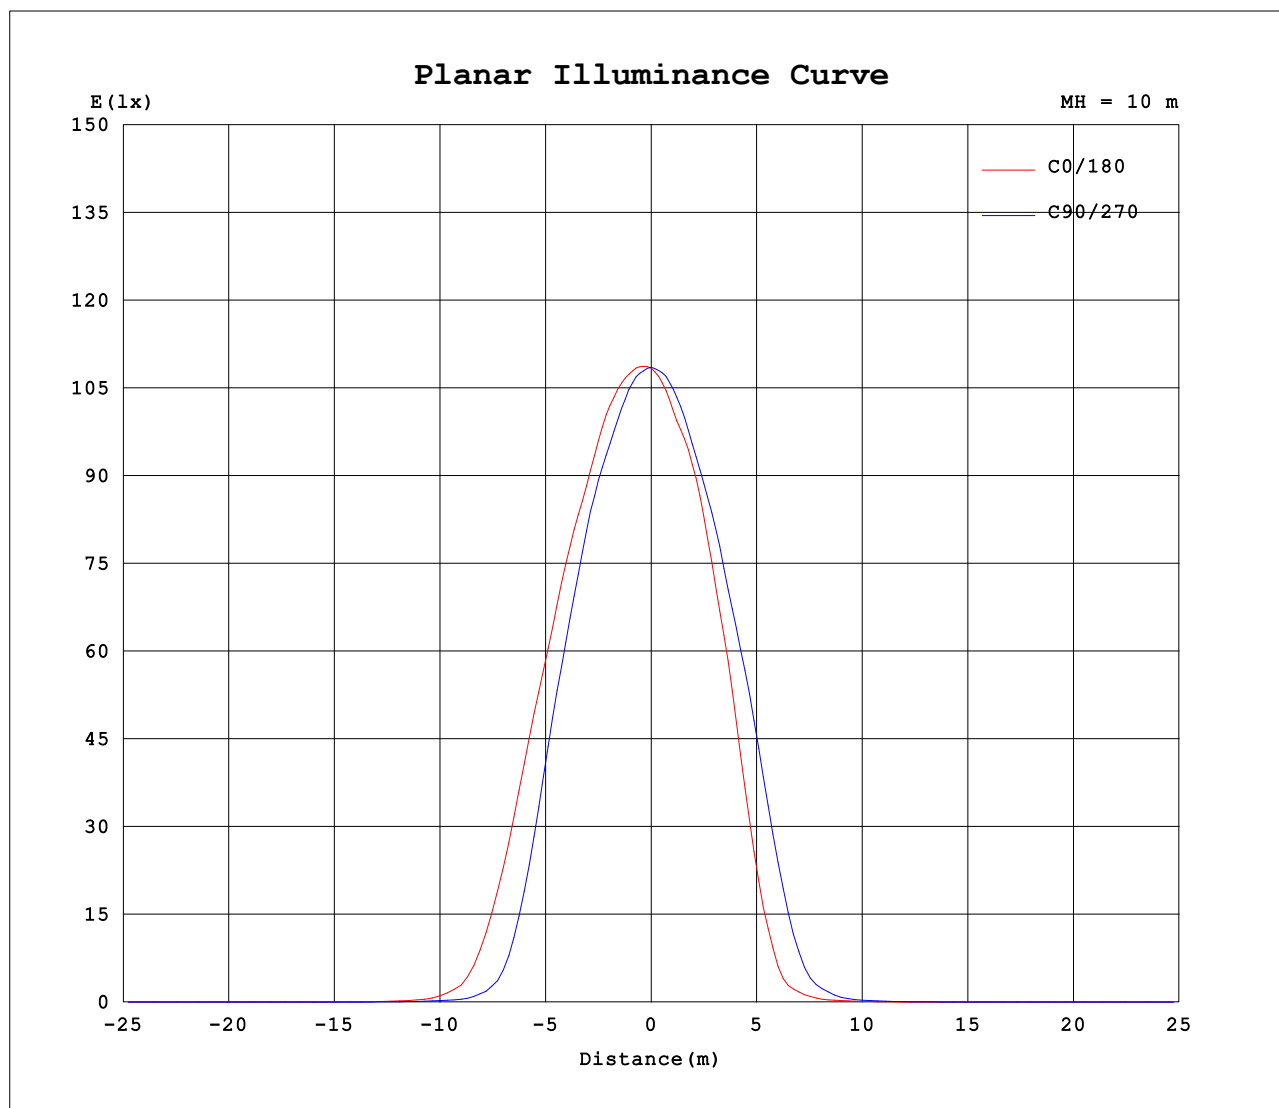

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.5820A P:69.40W PF:0.9930 Freq:60.00Hz Lamp Flux:7953.04x1 lm								
NAME: WL-2CLD8IN70WB5D3HVWH					TYPE:4000K			WEIGHT:
SPEC.:					DIM.: 8IN			SERIAL No.:
MFR.: WS					SUR.:0.0505*3.1415			Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1084	1081	1085	1087	1084	1081	1085	1087										
5	1092	1084	1071	1063	1042	1049	1072	1086										
10	1082	1053	1021	1011	989	988	1023	1068										
15	1038	989	960	942	880	909	958	1001										
20	974	919	837	783	704	768	851	935										
25	862	785	655	549	418	544	708	802										
30	696	583	362	247	143	239	443	583										
35	419	273	101	51.0	32.3	55.9	158	291										
40	141	58.8	22.3	15.5	9.19	13.5	39.1	71.7										
45	32.2	15.8	7.84	5.78	4.14	6.08	10.2	16.5										
50	9.16	6.10	3.62	2.58	1.77	2.52	4.38	6.85										
55	4.05	2.68	1.62	1.28	0.93	1.25	1.79	2.78										
60	1.66	1.28	0.81	0.32	0.08	0.33	0.92	1.32										
65	0.84	0.36	0.02	0.02	0.01	0.01	0.08	0.40										
70	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01										
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01										
80	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01										
85	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.01										
90	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.00	0.01	0.01	0.00	0.00	0.00	0.00										
115	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00										
120	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01										
125	0.01	0.02	0.04	0.07	0.07	0.04	0.02	0.01										
130	0.03	0.05	0.11	0.17	0.14	0.10	0.05	0.04										
135	0.10	0.14	0.22	0.30	0.23	0.18	0.12	0.09										
140	0.21	0.26	0.34	0.42	0.34	0.28	0.20	0.17										
145	0.34	0.38	0.46	0.54	0.44	0.38	0.30	0.26										
150	0.47	0.50	0.57	0.65	0.54	0.47	0.41	0.37										
155	0.59	0.61	0.68	0.76	0.64	0.56	0.51	0.47										
160	0.70	0.71	0.78	0.86	0.77	0.67	0.60	0.56										
165	0.80	0.82	0.89	0.97	0.93	0.81	0.72	0.67										
170	0.92	0.93	0.99	1.06	1.06	0.96	0.87	0.83										
175	1.05	1.03	1.06	1.11	1.13	1.05	1.00	0.99										
180	1.13	1.08	1.08	1.10	1.13	1.08	1.07	1.09										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: