


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.71 lm/W			
MODEL	1X4	I _{max} (cd)	1140	S/MH(C0/180)	1.22
NOMINAL POWER(W)	24W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3181.2	η UP,DN(C0-180)	0.1,50.6
NOMINAL FLUX(lm)	3181.19	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.3
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

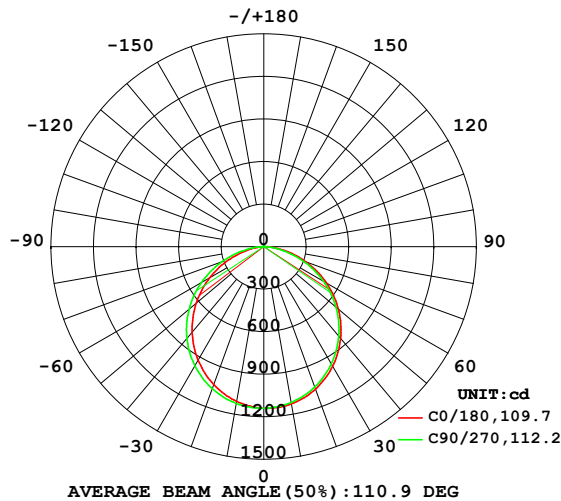

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

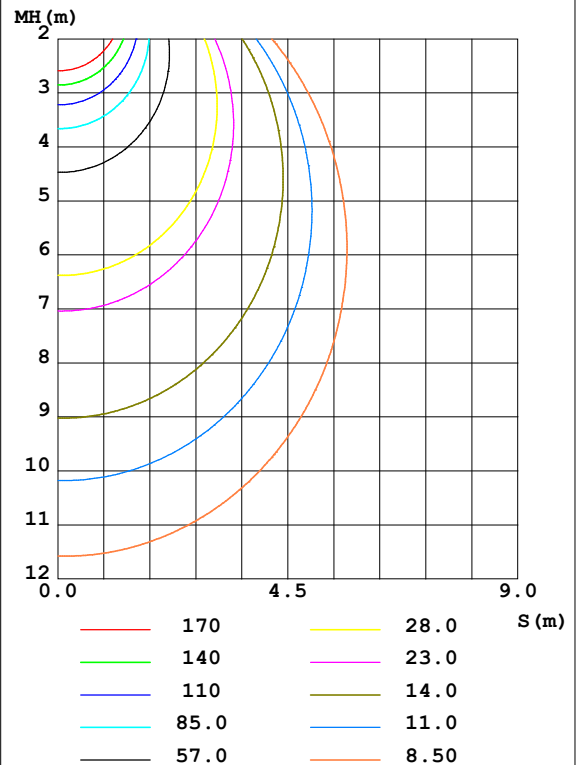

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1126	1124	1116	1113	1108	1112	1122	1123	0- 10	107.7	107.7	3.39,3.39
20	1069	1067	1053	1047	1035	1045	1066	1065	10- 20	308.1	415.8	13.1,13.1
30	973.0	972.3	953.6	944.1	926.0	940.7	971.4	967.8	20- 30	465.5	881.3	27.7,27.7
40	843.1	844.1	822.7	810.0	787.3	804.7	844.9	837.3	30- 40	559.0	1440	45.3,45.3
50	686.8	688.0	665.2	649.9	622.7	643.2	688.4	680.1	40- 50	576.6	2017	63.4,63.4
60	509.7	509.7	485.3	469.7	441.6	461.2	510.2	500.4	50- 60	516.3	2533	79.6,79.6
70	318.9	318.1	291.8	278.3	250.9	267.8	315.3	306.7	60- 70	386.0	2919	91.8,91.8
80	134.0	129.3	107.8	97.88	77.03	90.17	123.8	121.3	70- 80	210.2	3129	98.4,98.4
90	3.898	2.310	0.1550	0.1476	0.1309	0.1405	0.2077	0.6930	80- 90	48.15	3178	99.9,99.9
100	0.2106	0.2423	0.2301	0.2445	0.2424	0.2373	0.2255	0.2515	90-100	0.2522	3178	99.9,99.9
110	0.3269	0.3586	0.3683	0.3921	0.4168	0.3802	0.3564	0.3724	100-110	0.3188	3178	99.9,99.9
120	0.4770	0.4798	0.5256	0.5468	0.6348	0.5376	0.5091	0.5128	110-120	0.4436	3179	99.9,99.9
130	0.6296	0.6106	0.6783	0.6946	0.7779	0.6926	0.6569	0.6289	120-130	0.5370	3179	99.9,99.9
140	0.7990	0.7631	0.8407	0.8445	0.9547	0.8501	0.7853	0.7594	130-140	0.5775	3180	100,100
150	1.007	0.9230	0.9909	0.9823	1.107	0.9882	0.9670	0.8950	140-150	0.5659	3180	100,100
160	1.159	1.059	1.114	1.115	1.274	1.112	1.083	1.038	150-160	0.4861	3181	100,100
170	1.216	1.138	1.170	1.202	1.386	1.276	1.151	1.118	160-170	0.3287	3181	100,100
180	1.308	1.226	1.214	1.251	1.311	1.221	1.221	1.251	170-180	0.1169	3181	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

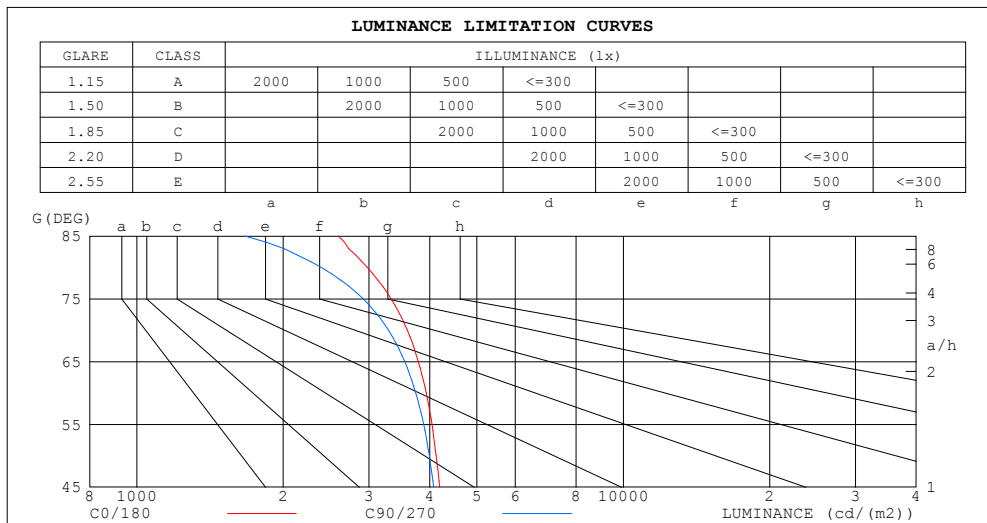

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2599	1667
80	2979	2395
75	3334	2921
70	3599	3292
65	3791	3555
60	3935	3745
55	4042	3888
50	4124	3993
45	4195	4077


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.41	.56	.47	.41	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

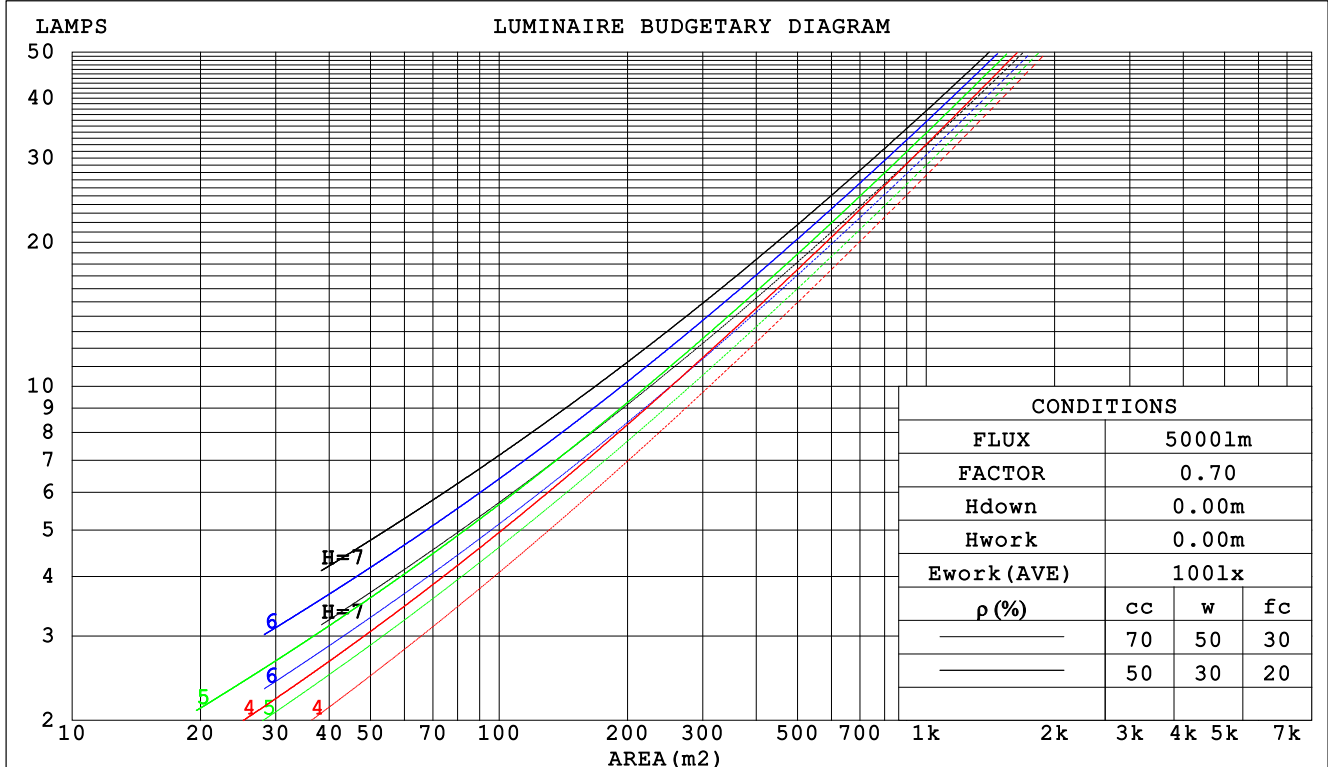

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm					
NAME: 净化灯			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 4FT		SERIAL No.:
MFR.: WS			SUR.:0.0825*3.14715		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.303	.173	.055	.296	.169	.054	.283	.162	.052	.271	.156	.050	.259	.150	.048		
2.0	.287	.158	.048	.281	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.242	.132	.041	.233	.129	.040		
4.0	.247	.128	.038	.242	.127	.037	.233	.123	.037	.224	.120	.036	.216	.118	.036		
5.0	.229	.117	.034	.224	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032		
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029		
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.076	.141	.099	.066	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.060	.135	.088	.052	.093	.061	.036	.054	.036	.022	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.129	.070	.030	.111	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm											
NAME: 净化灯					TYPE:3000K			WEIGHT:			
SPEC.:					DIM.: 4FT			SERIAL No.:			
MFR.: WS					SUR.:0.0825*3.14715			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	17.9	19.4	18.1	19.6	19.8	17.7	19.2	18.0	19.4	19.6
	3H	19.4	20.8	19.7	21.0	21.3	19.1	20.5	19.4	20.8	21.0
	4H	20.0	21.3	20.3	21.6	21.8	19.7	21.0	20.0	21.2	21.5
	6H	20.4	21.7	20.8	22.0	22.2	20.0	21.2	20.3	21.5	21.8
	8H	20.6	21.8	20.9	22.1	22.4	20.1	21.3	20.4	21.6	21.9
	12H	20.7	21.8	21.0	22.1	22.4	20.1	21.3	20.5	21.6	21.9
4H	2H	18.5	19.8	18.8	20.1	20.3	18.3	19.7	18.7	19.9	20.2
	3H	20.2	21.4	20.6	21.7	22.0	20.0	21.1	20.3	21.4	21.7
	4H	20.9	22.0	21.3	22.3	22.6	20.6	21.7	21.0	22.0	22.3
	6H	21.5	22.4	21.9	22.8	23.1	21.1	22.0	21.5	22.4	22.7
	8H	21.7	22.5	22.1	22.9	23.3	21.2	22.1	21.6	22.4	22.8
	12H	21.8	22.6	22.2	23.0	23.4	21.3	22.1	21.7	22.4	22.9
8H	4H	21.2	22.1	21.6	22.4	22.8	20.9	21.8	21.3	22.2	22.5
	6H	21.9	22.6	22.3	23.0	23.4	21.5	22.2	21.9	22.6	23.1
	8H	22.1	22.8	22.6	23.2	23.7	21.7	22.3	22.2	22.8	23.2
	12H	22.3	22.9	22.8	23.3	23.8	21.8	22.4	22.3	22.8	23.3
12H	4H	21.2	22.0	21.6	22.4	22.8	20.9	21.7	21.4	22.1	22.5
	6H	21.9	22.6	22.4	23.0	23.4	21.6	22.2	22.0	22.6	23.1
	8H	22.2	22.8	22.7	23.2	23.7	21.8	22.3	22.3	22.8	23.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3181 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	96	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

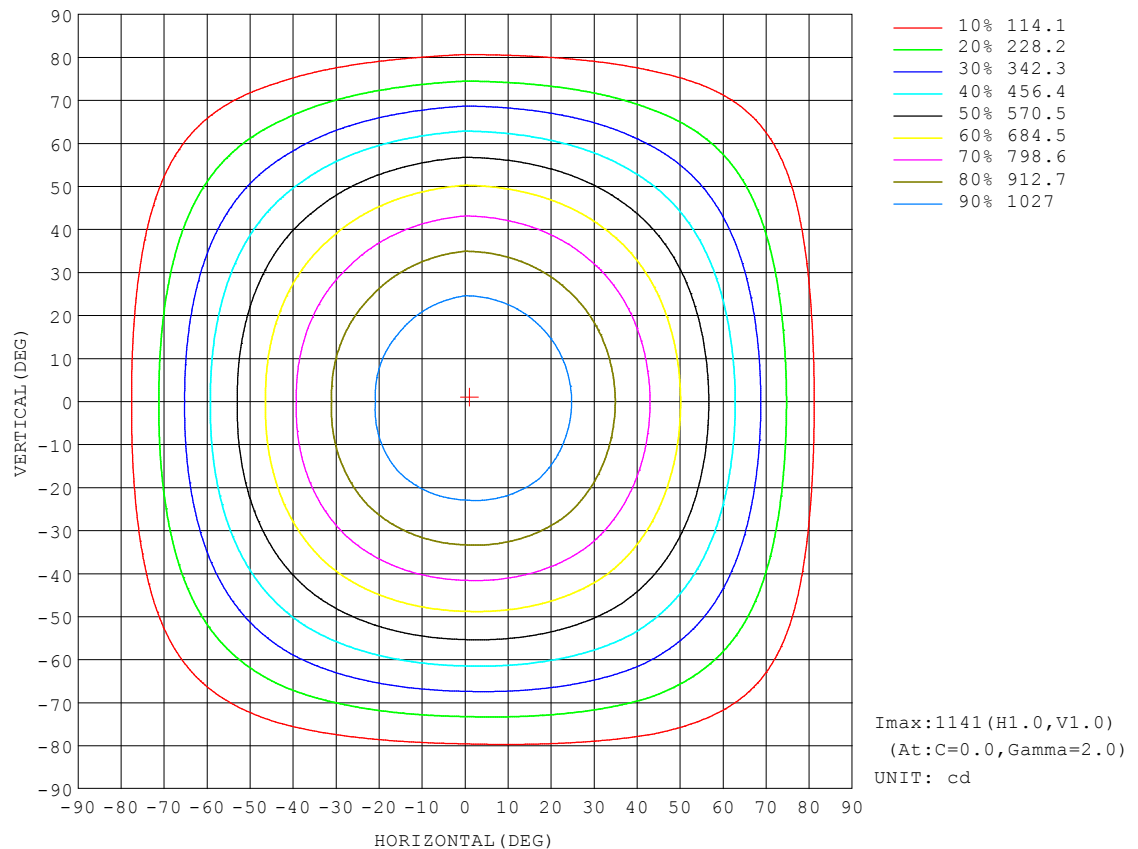


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

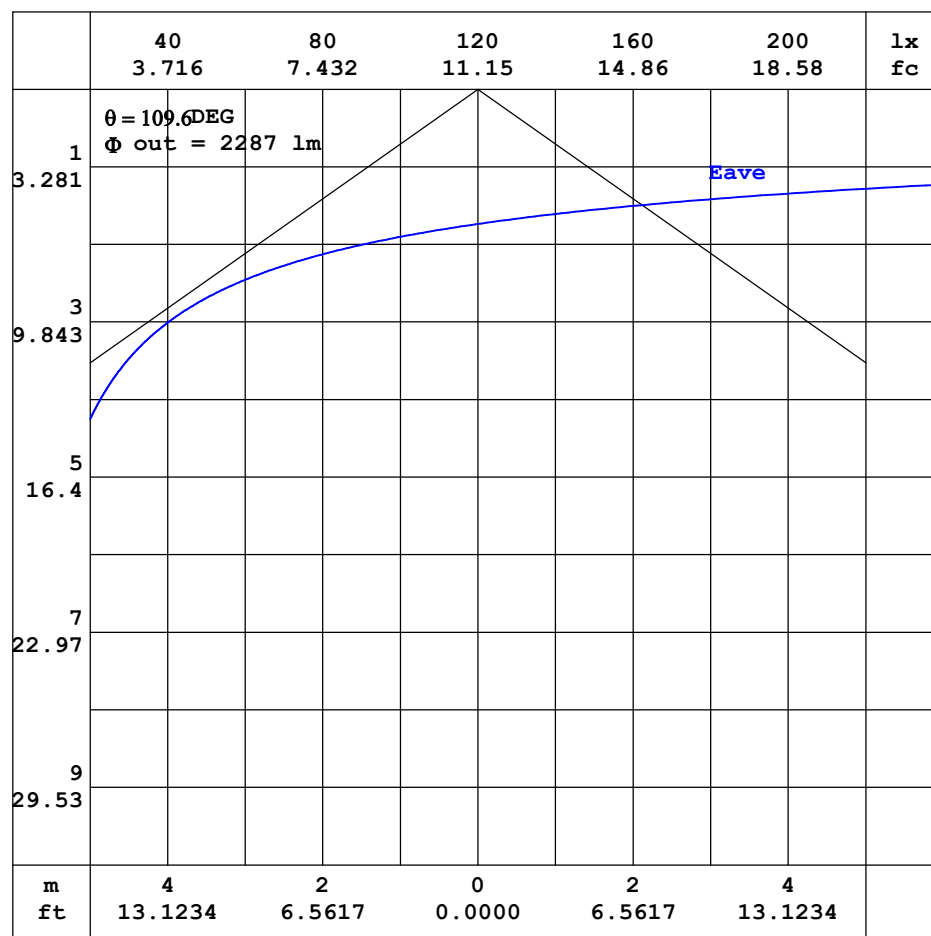


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

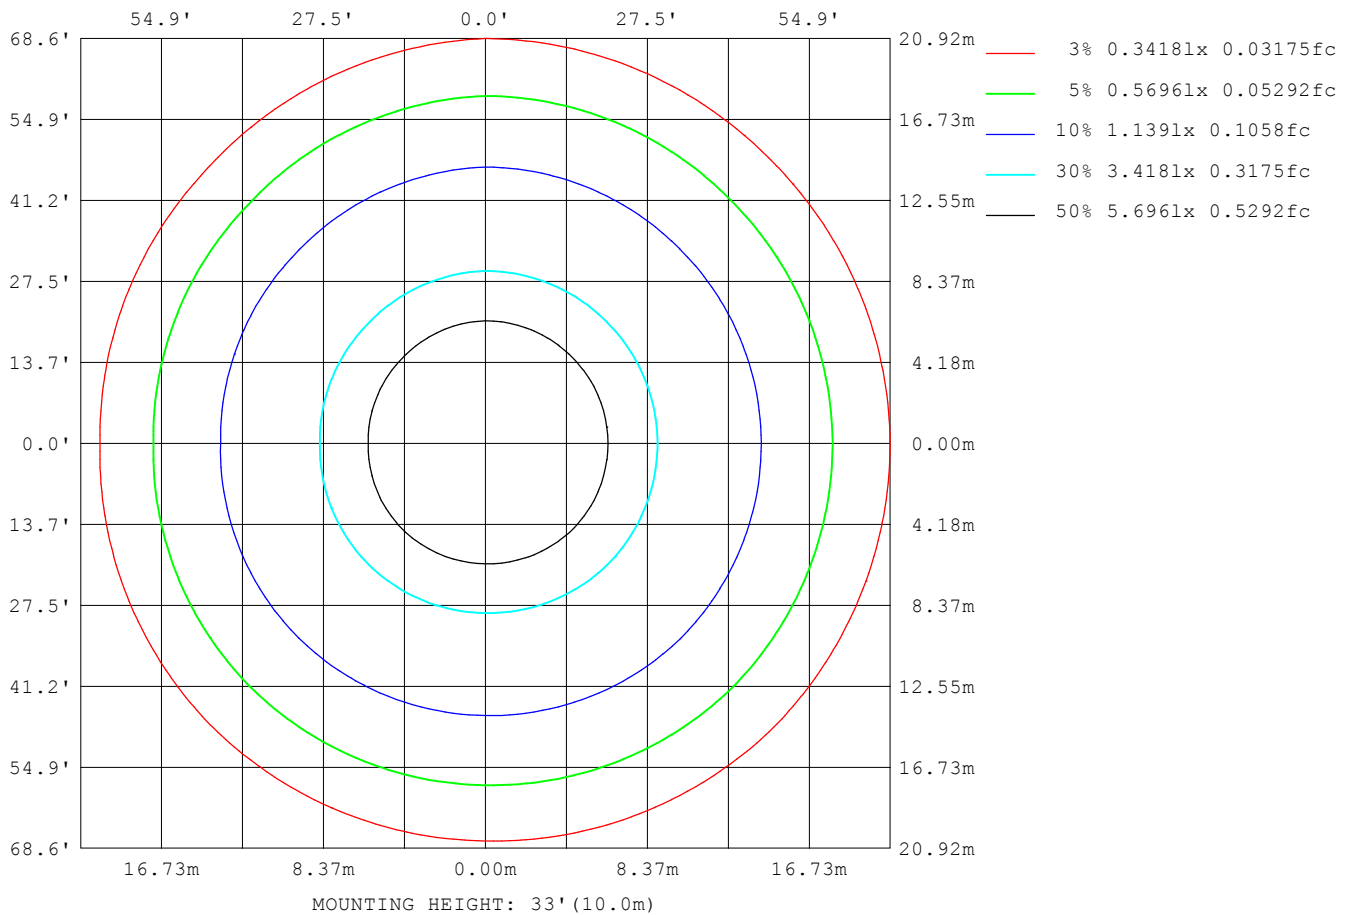

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3478
L_0~180 (75) av	2854
L_0~180 (85) av	1602
L_90~270 (65) av	3672
L_90~270 (75) av	3081
L_90~270 (85) av	1910
L_45 (65) av	3560
L_45 (75) av	2951
L_45 (85) av	1709

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

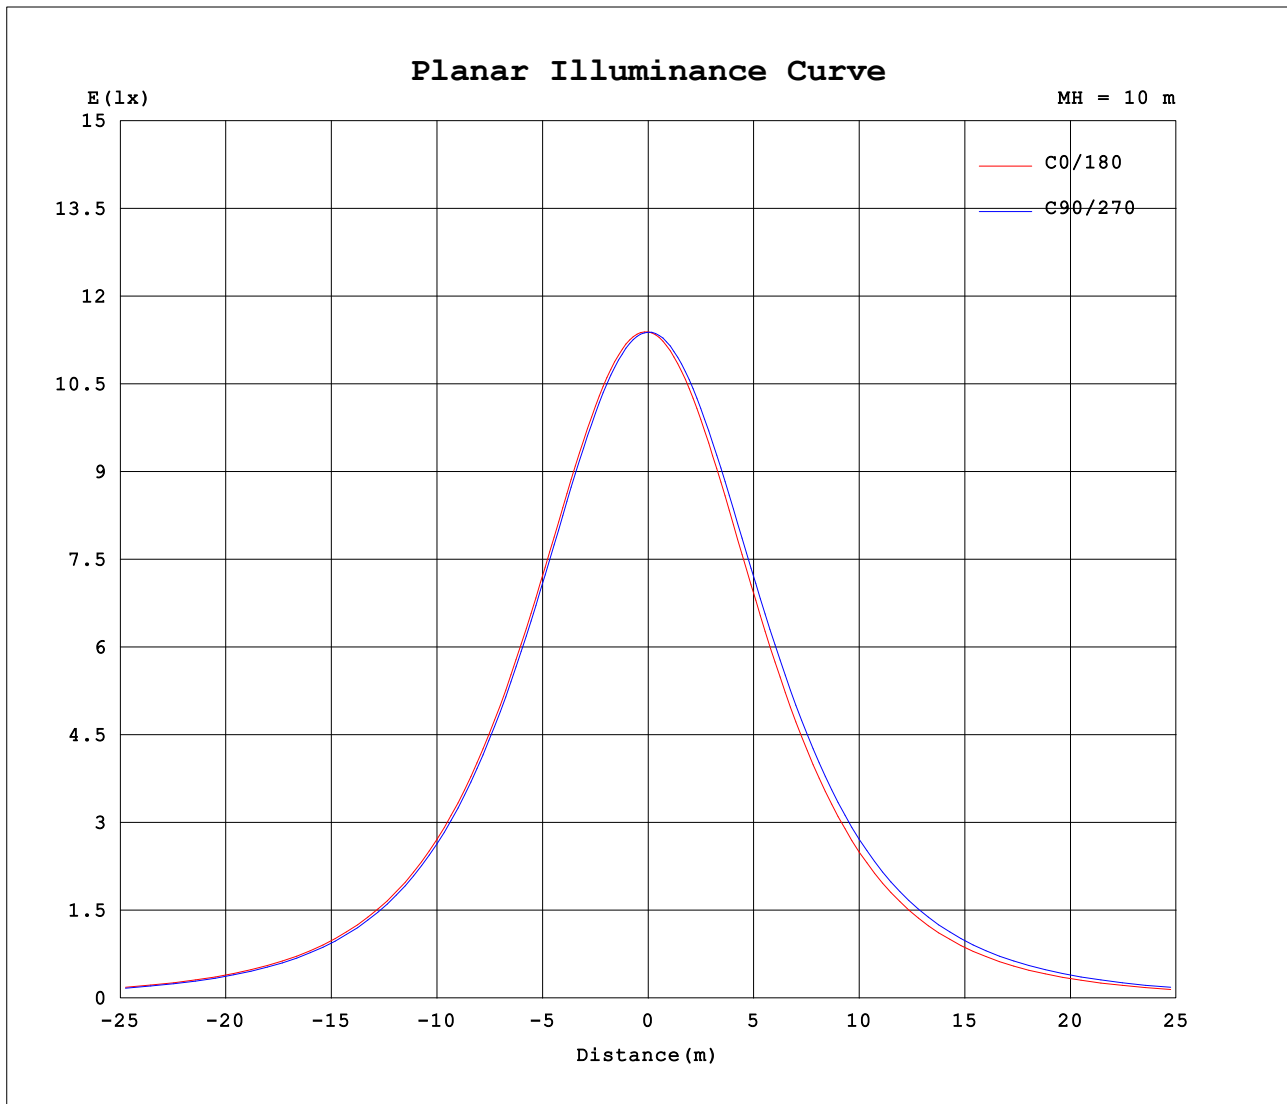

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.1920A P:23.10W PF:0.9960 Freq:50.00Hz Lamp Flux:3181.19x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1140	1140	1140	1140	1140	1140	1140	1140										
5	1138	1137	1133	1132	1129	1131	1136	1137										
10	1126	1124	1116	1113	1108	1112	1122	1123										
15	1103	1101	1089	1085	1076	1083	1099	1099										
20	1069	1067	1053	1047	1035	1045	1066	1065										
25	1025	1024	1008	1000	985	997	1023	1021										
30	973	972	954	944	926	941	971	968										
35	912	912	892	880	860	876	912	907										
40	843	844	823	810	787	805	845	837										
45	768	769	747	733	707	727	770	762										
50	687	688	665	650	623	643	688	680										
55	601	601	578	562	534	554	602	593										
60	510	510	485	470	442	461	510	500										
65	415	415	389	374	346	365	415	404										
70	319	318	292	278	251	268	315	307										
75	224	222	196	185	159	174	217	210										
80	134	129	108	97.9	77.0	90.2	124	121										
85	58.7	53.3	37.6	29.3	13.6	24.2	48.6	47.5										
90	3.90	2.31	0.16	0.15	0.13	0.14	0.21	0.69										
95	0.15	0.18	0.18	0.19	0.18	0.18	0.18	0.19										
100	0.21	0.24	0.23	0.24	0.24	0.24	0.23	0.25										
105	0.26	0.30	0.30	0.35	0.32	0.31	0.28	0.31										
110	0.33	0.36	0.37	0.39	0.42	0.38	0.36	0.37										
115	0.40	0.42	0.45	0.47	0.48	0.46	0.44	0.45										
120	0.48	0.48	0.53	0.55	0.63	0.54	0.51	0.51										
125	0.55	0.55	0.60	0.61	0.71	0.61	0.58	0.59										
130	0.63	0.61	0.68	0.69	0.78	0.69	0.66	0.63										
135	0.69	0.68	0.76	0.78	0.87	0.77	0.72	0.69										
140	0.80	0.76	0.84	0.84	0.95	0.85	0.79	0.76										
145	0.92	0.84	0.92	0.91	1.03	0.93	0.85	0.83										
150	1.01	0.92	0.99	0.98	1.11	0.99	0.97	0.90										
155	1.11	0.99	1.05	1.06	1.19	1.05	1.03	0.97										
160	1.16	1.06	1.11	1.12	1.27	1.11	1.08	1.04										
165	1.16	1.10	1.15	1.17	1.35	1.16	1.13	1.09										
170	1.22	1.14	1.17	1.20	1.39	1.28	1.15	1.12										
175	1.22	1.14	1.19	1.25	1.36	1.28	1.24	1.19										
180	1.31	1.23	1.21	1.25	1.31	1.22	1.22	1.25										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: