


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 143.57 lm/W			
MODEL	1X4	I _{max} (cd)	1163	S/MH(C0/180)	1.21
NOMINAL POWER(W)	24W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3244.7	η UP,DN(C0-180)	0.1,50.8
NOMINAL FLUX(lm)	3244.67	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.1
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

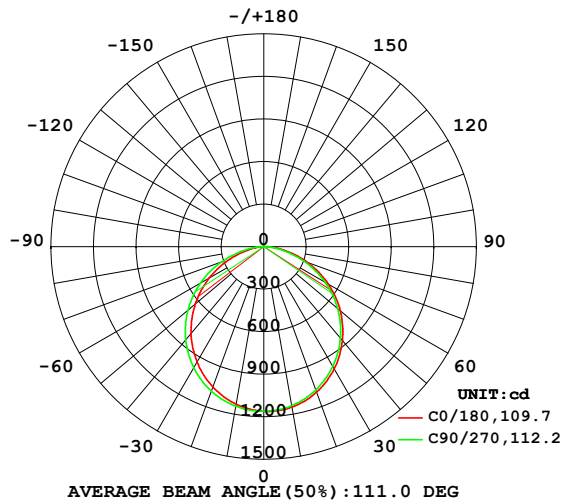

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

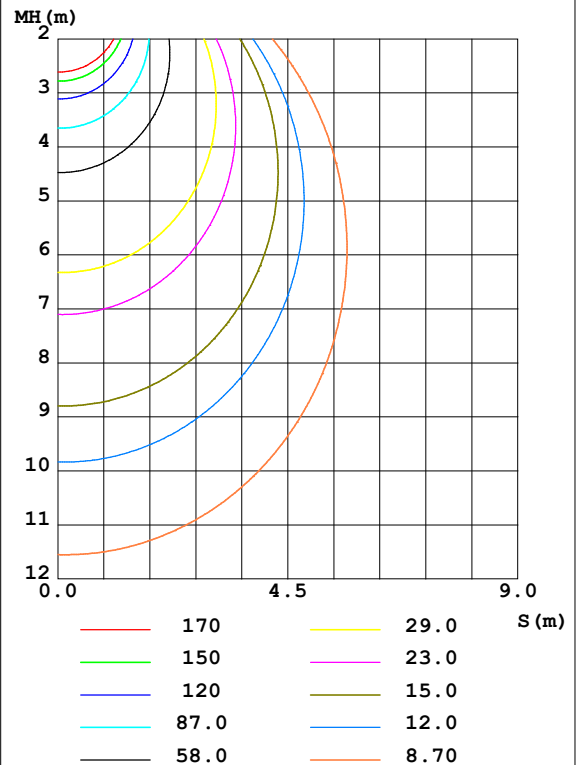

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1149	1147	1138	1135	1128	1133	1143	1144	0- 10	109.8	109.8	3.38,3.38
20	1092	1090	1075	1067	1053	1063	1084	1085	10- 20	314.0	423.9	13.1,13.1
30	994.8	994.5	974.5	962.7	940.8	955.4	987.4	986.0	20- 30	474.5	898.3	27.7,27.7
40	863.5	864.4	841.7	825.9	799.0	815.6	857.1	853.5	30- 40	569.8	1468	45.2,45.2
50	704.9	705.9	681.4	662.9	630.6	650.8	698.6	693.1	40- 50	587.8	2056	63.4,63.4
60	524.6	524.3	498.1	478.7	445.5	465.4	516.5	510.4	50- 60	526.4	2582	79.6,79.6
70	330.1	328.4	300.9	283.9	251.9	268.9	318.7	313.2	60- 70	393.8	2976	91.7,91.7
80	140.9	136.7	112.2	99.64	75.24	88.91	124.2	124.3	70- 80	214.7	3191	98.3,98.3
90	4.806	2.879	0.2390	0.2079	0.1358	0.1526	0.1550	0.7760	80- 90	49.46	3240	99.9,99.9
100	0.2834	0.3225	0.3366	0.3553	0.2667	0.2519	0.2327	0.2608	90-100	0.3267	3241	99.9,99.9
110	0.4459	0.4848	0.5158	0.5366	0.4365	0.3949	0.3709	0.3769	100-110	0.3866	3241	99.9,99.9
120	0.6566	0.6472	0.7000	0.7203	0.6693	0.5790	0.5356	0.5316	110-120	0.5302	3242	99.9,99.9
130	0.8336	0.8120	0.8889	0.9039	0.8511	0.7535	0.7150	0.6620	120-130	0.6405	3242	99.9,99.9
140	1.023	0.9914	0.9693	1.080	1.053	0.9497	0.8702	0.8287	130-140	0.6857	3243	99.9,99.9
150	1.248	1.161	1.124	1.233	1.285	1.175	1.119	1.044	140-150	0.6773	3244	100,100
160	1.401	1.301	1.240	1.363	1.481	1.328	1.204	1.225	150-160	0.5781	3244	100,100
170	1.428	1.369	1.323	1.457	1.607	1.527	1.299	1.334	160-170	0.3873	3245	100,100
180	1.551	1.473	1.376	1.501	1.547	1.469	1.376	1.503	170-180	0.1376	3245	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

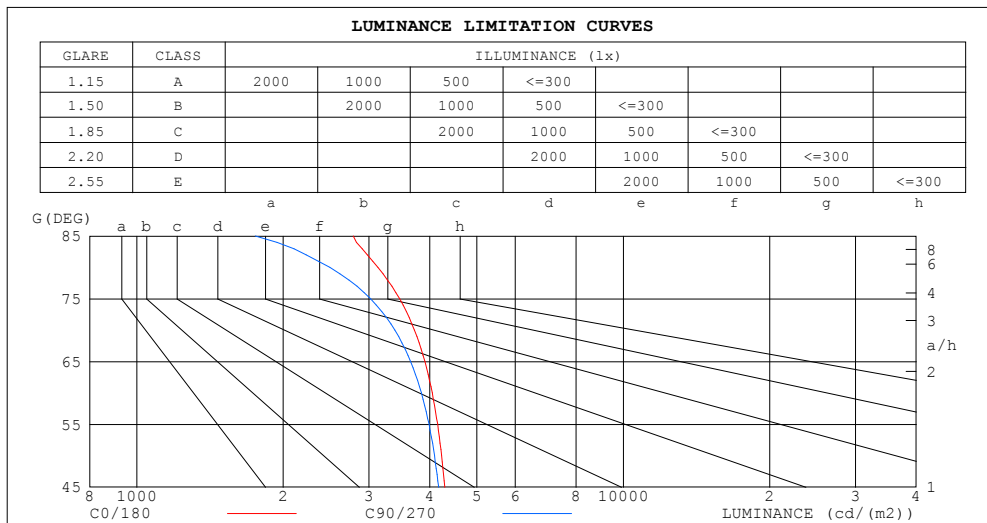


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.41	.56	.47	.41	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

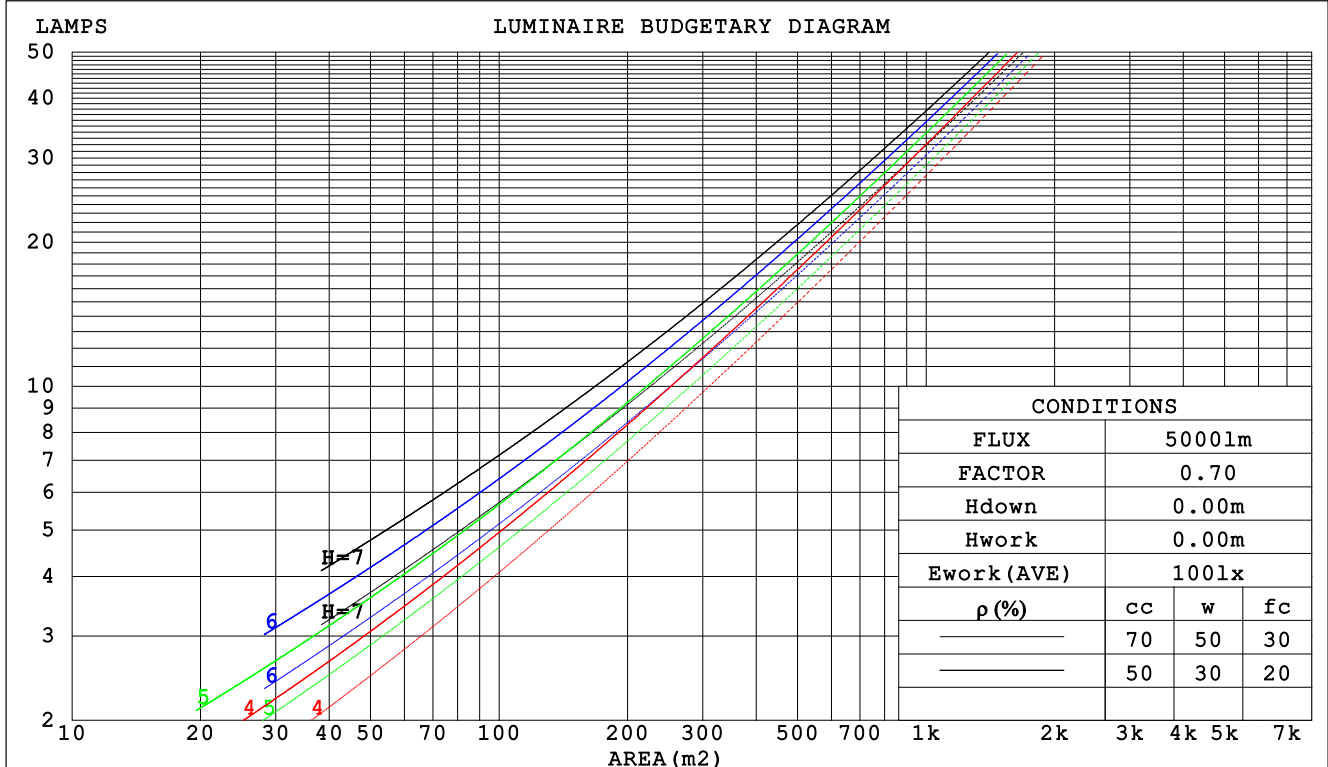

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.304	.173	.055	.296	.169	.054	.283	.162	.052	.271	.156	.050	.260	.150	.049		
2.0	.288	.158	.048	.281	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.262	.140	.042	.251	.136	.041	.242	.132	.041	.233	.129	.040		
4.0	.247	.128	.038	.242	.127	.037	.233	.124	.037	.224	.120	.036	.216	.118	.036		
5.0	.229	.117	.034	.224	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032		
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029		
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.100	.148	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.076	.141	.099	.066	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.060	.135	.088	.052	.093	.061	.037	.054	.036	.022	.017	.012	.007	
5.0	.150	.092	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.070	.030	.112	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.026	.106	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.024	.102	.053	.021	.071	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm											
NAME: 净化灯					TYPE:3500K			WEIGHT:			
SPEC.:					DIM.: 4FT			SERIAL No.:			
MFR.: WS					SUR.:0.0825*3.14715			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	18.0	19.5	18.3	19.7	19.9	17.8	19.3	18.1	19.5	19.7	
	3H	19.5	20.9	19.8	21.2	21.4	19.3	20.7	19.6	20.9	21.1
	4H	20.2	21.5	20.5	21.7	22.0	19.8	21.1	20.1	21.4	21.6
	6H	20.6	21.8	20.9	22.1	22.4	20.1	21.4	20.5	21.7	21.9
	8H	20.7	21.9	21.1	22.2	22.5	20.2	21.4	20.6	21.7	22.0
	12H	20.8	22.0	21.2	22.3	22.6	20.2	21.4	20.6	21.7	22.0
4H	2H	18.6	19.9	18.9	20.2	20.4	18.5	19.8	18.8	20.0	20.3
	3H	20.3	21.5	20.7	21.8	22.1	20.1	21.3	20.5	21.6	21.9
	4H	21.1	22.1	21.5	22.5	22.8	20.8	21.8	21.1	22.1	22.5
	6H	21.6	22.6	22.0	22.9	23.3	21.2	22.2	21.6	22.5	22.9
	8H	21.8	22.7	22.3	23.1	23.5	21.4	22.2	21.8	22.6	23.0
	12H	22.0	22.8	22.4	23.2	23.6	21.4	22.2	21.8	22.6	23.0
8H	4H	21.3	22.2	21.8	22.6	23.0	21.1	21.9	21.5	22.3	22.7
	6H	22.1	22.8	22.5	23.2	23.6	21.7	22.4	22.1	22.8	23.2
	8H	22.3	23.0	22.8	23.4	23.9	21.9	22.5	22.3	22.9	23.4
	12H	22.5	23.1	23.0	23.5	24.0	22.0	22.5	22.5	23.0	23.5
12H	4H	21.3	22.1	21.8	22.5	22.9	21.1	21.9	21.5	22.3	22.7
	6H	22.1	22.7	22.6	23.2	23.6	21.7	22.4	22.2	22.8	23.3
	8H	22.4	23.0	22.9	23.4	23.9	22.0	22.5	22.4	23.0	23.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3245 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	80	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

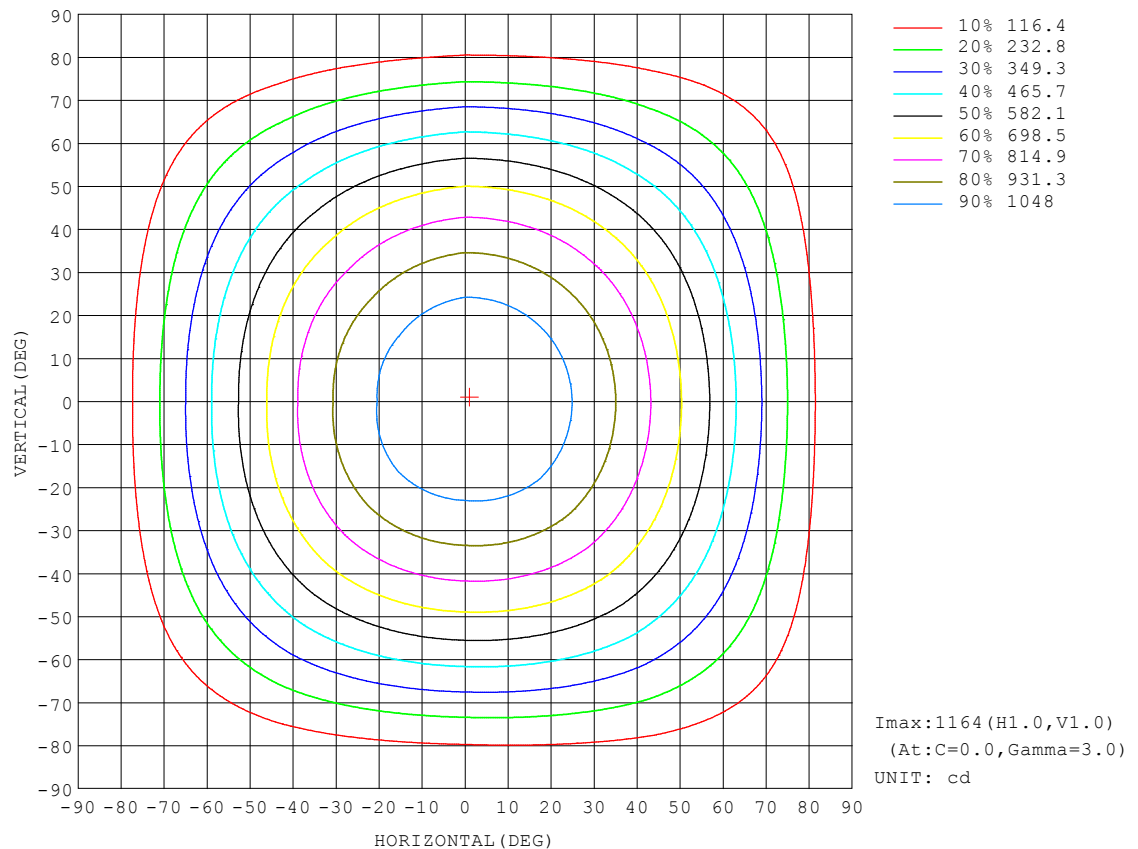


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

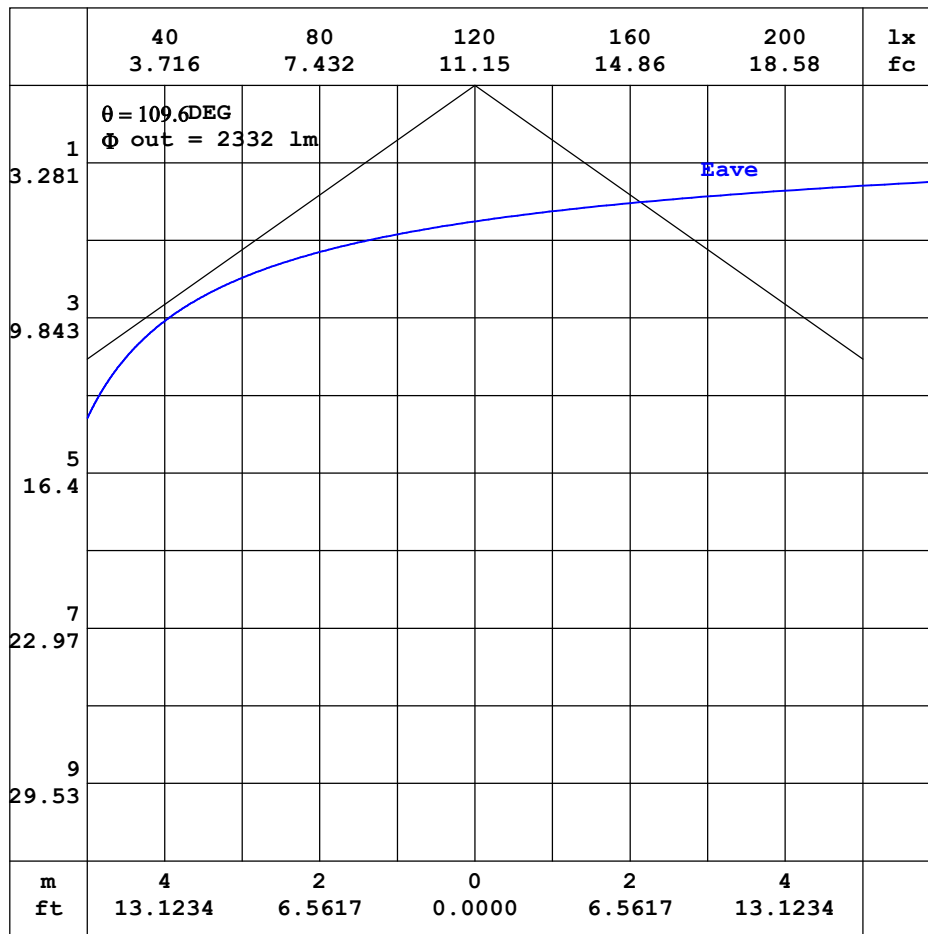


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

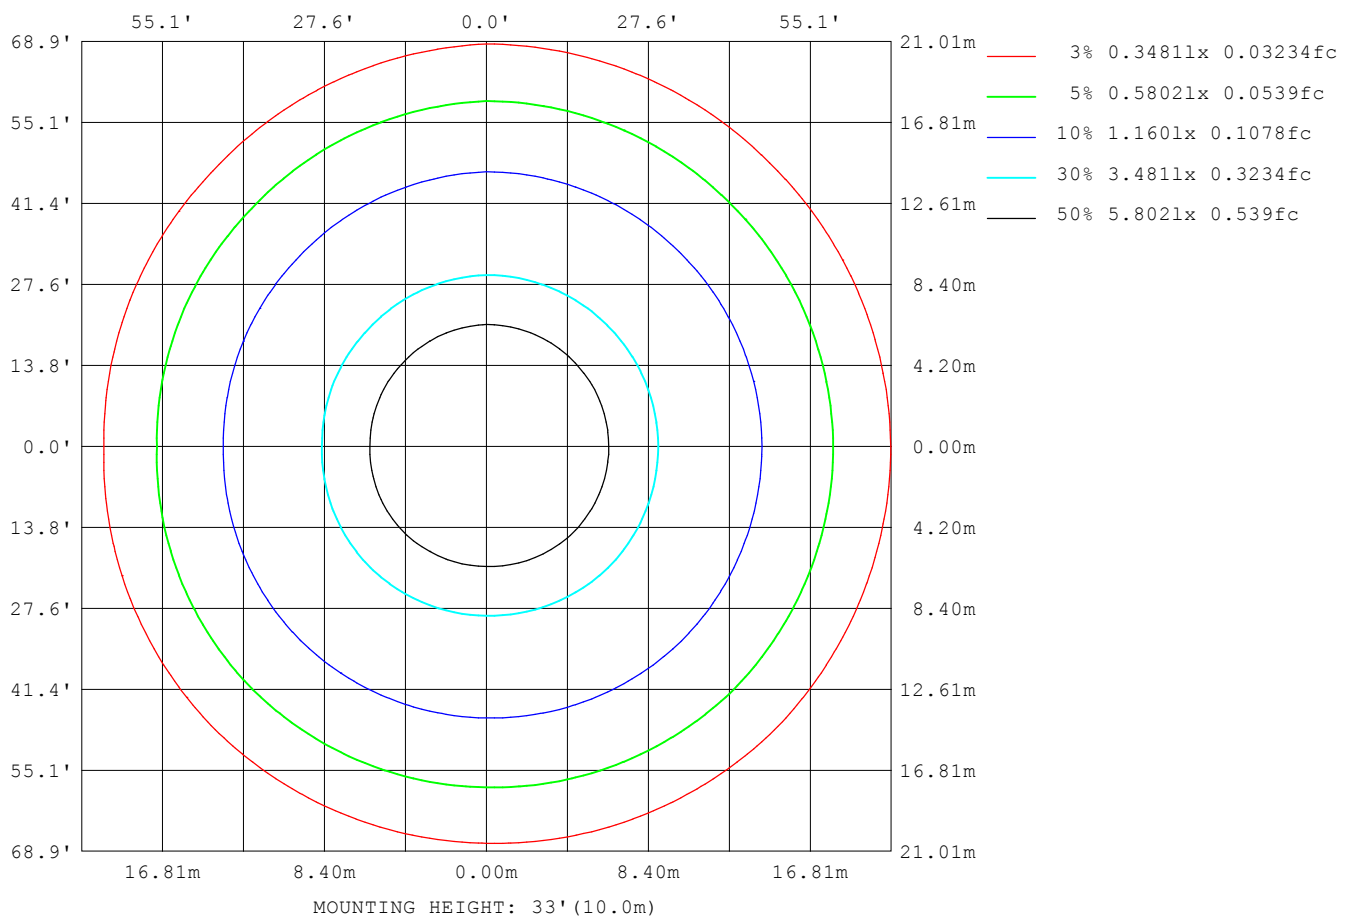

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3552
L_0~180 (75) av	2920
L_0~180 (85) av	1654
L_90~270 (65) av	3744
L_90~270 (75) av	3146
L_90~270 (85) av	1944
L_45 (65) av	3632
L_45 (75) av	3017
L_45 (85) av	1754

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

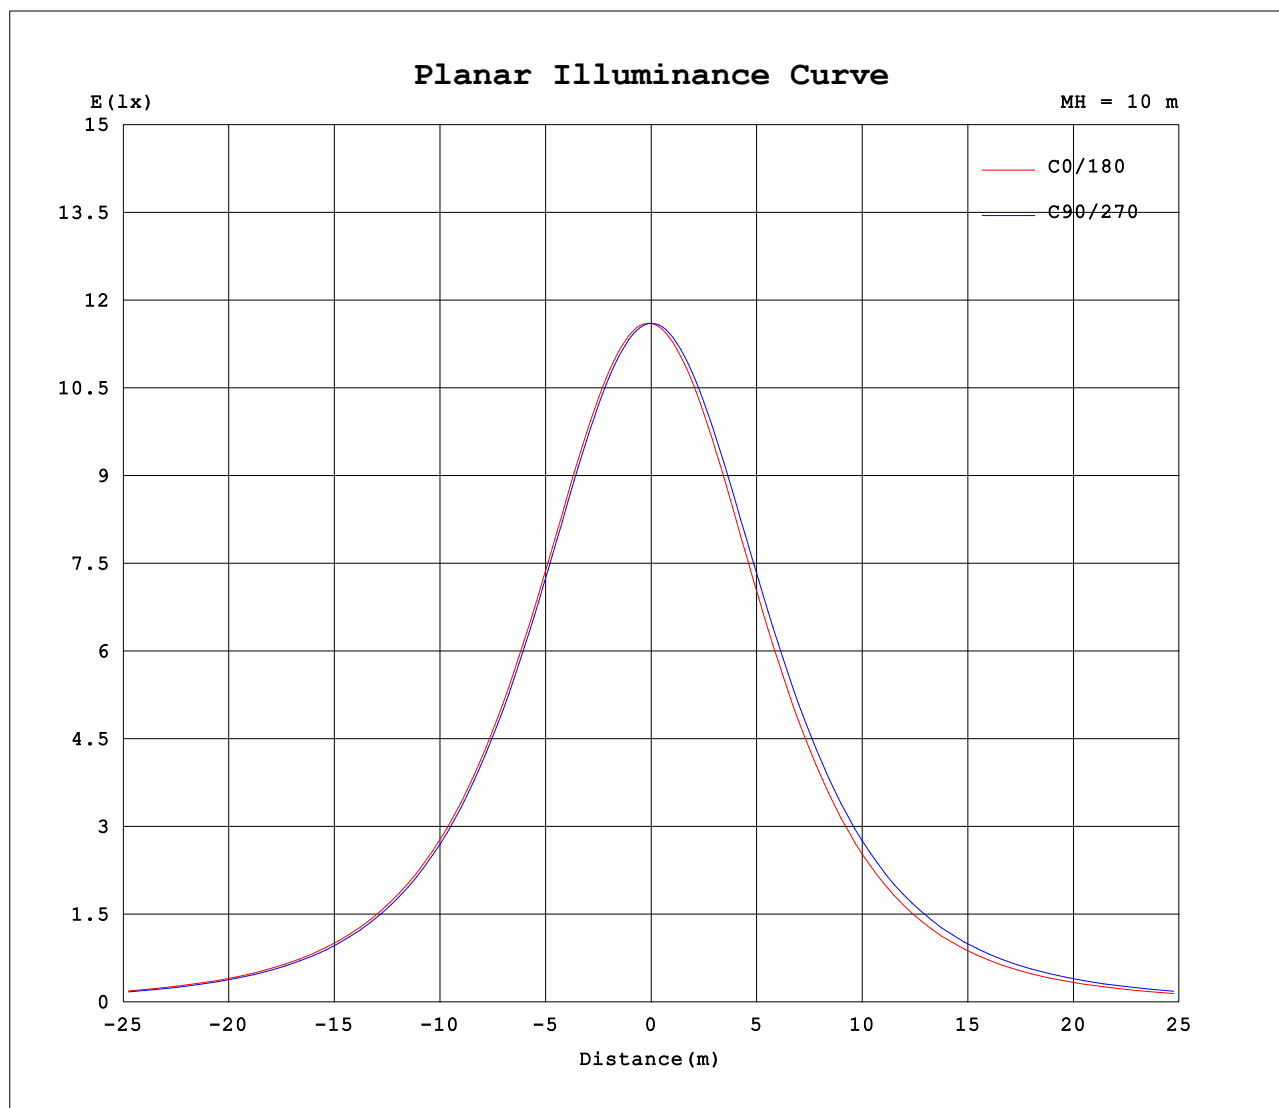

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.1880A P:22.60W PF:0.9960 Freq:50.00Hz Lamp Flux:3244.67x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1162	1162	1162	1162	1162	1162	1162	1162										
5	1161	1160	1155	1153	1150	1152	1157	1158										
10	1149	1147	1138	1135	1128	1133	1143	1144										
15	1126	1124	1112	1106	1096	1102	1118	1120										
20	1092	1090	1075	1067	1053	1063	1084	1085										
25	1048	1047	1029	1019	1001	1013	1040	1040										
30	995	994	974	963	941	955	987	986										
35	933	933	912	898	873	889	926	924										
40	863	864	842	826	799	816	857	853										
45	787	788	765	747	717	736	781	777										
50	705	706	681	663	631	651	699	693										
55	618	618	593	573	540	561	610	604										
60	525	524	498	479	445	465	516	510										
65	428	428	400	382	349	368	419	413										
70	330	328	301	284	252	269	319	313										
75	233	231	203	189	159	174	219	215										
80	141	137	112	99.6	75.2	88.9	124	124										
85	63.0	57.2	39.5	29.7	11.7	22.4	48.2	49.1										
90	4.81	2.88	0.24	0.21	0.14	0.15	0.15	0.78										
95	0.23	0.26	0.27	0.27	0.19	0.19	0.18	0.20										
100	0.28	0.32	0.34	0.36	0.27	0.25	0.23	0.26										
105	0.36	0.41	0.42	0.46	0.33	0.32	0.29	0.32										
110	0.45	0.48	0.52	0.54	0.44	0.39	0.37	0.38										
115	0.55	0.56	0.61	0.64	0.51	0.48	0.46	0.45										
120	0.66	0.65	0.70	0.72	0.67	0.58	0.54	0.53										
125	0.73	0.72	0.79	0.81	0.77	0.66	0.62	0.62										
130	0.83	0.81	0.89	0.90	0.85	0.75	0.72	0.66										
135	0.90	0.90	0.98	0.99	0.96	0.85	0.80	0.75										
140	1.02	0.99	0.97	1.08	1.05	0.95	0.87	0.83										
145	1.16	1.08	1.06	1.16	1.19	1.09	0.99	0.97										
150	1.25	1.16	1.12	1.23	1.28	1.18	1.12	1.04										
155	1.36	1.24	1.19	1.30	1.39	1.26	1.17	1.15										
160	1.40	1.30	1.24	1.36	1.48	1.33	1.20	1.23										
165	1.39	1.34	1.30	1.43	1.57	1.40	1.26	1.30										
170	1.43	1.37	1.32	1.46	1.61	1.53	1.30	1.33										
175	1.44	1.39	1.35	1.50	1.61	1.53	1.38	1.42										
180	1.55	1.47	1.38	1.50	1.55	1.47	1.38	1.50										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: