


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.06 lm/W			
MODEL	1X4	I _{max} (cd)	1732	S/MH(C0/180)	1.21
NOMINAL POWER(W)	36W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4821.5	η UP,DN(C0-180)	0.1,50.8
NOMINAL FLUX(lm)	4821.53	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.1
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

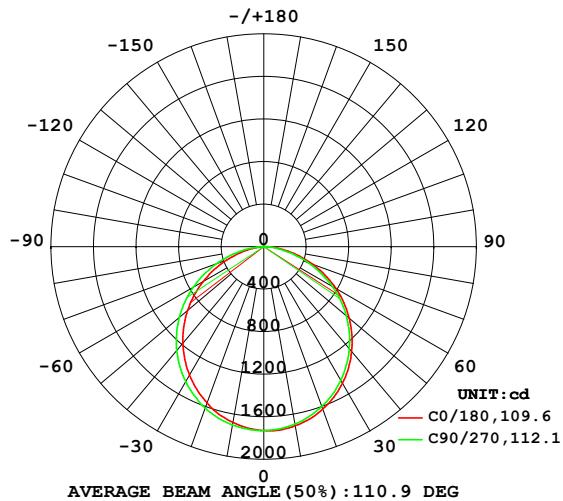

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

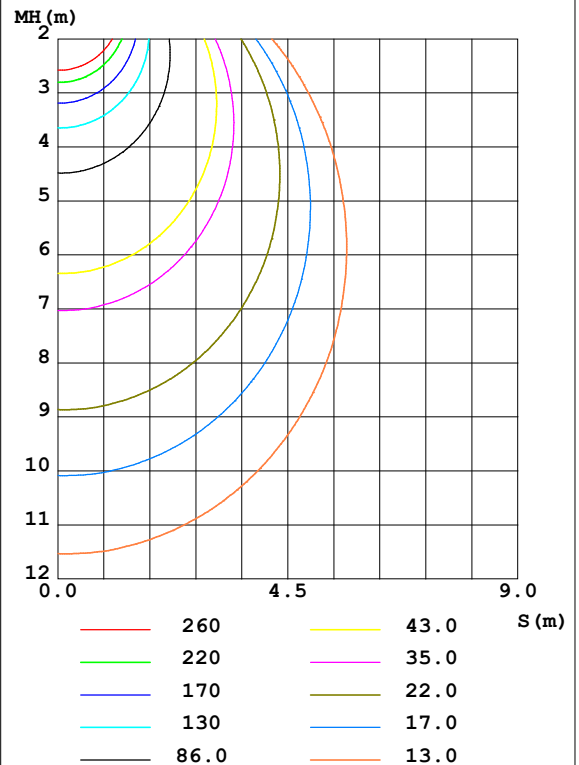

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1710	1707	1694	1688	1679	1686	1702	1703	0- 10	163.5	163.5	3.39,3.39
20	1626	1621	1599	1588	1563	1583	1615	1615	10- 20	467.4	630.8	13.1,13.1
30	1481	1474	1450	1426	1396	1425	1467	1469	20- 30	705.4	1336	27.7,27.7
40	1286	1281	1252	1224	1185	1217	1274	1272	30- 40	847.0	2183	45.3,45.3
50	1050	1045	1014	981.4	935.5	972.1	1038	1033	40- 50	873.8	3057	63.4,63.4
60	782.1	776.6	741.4	709.1	661.8	694.8	767.7	761.2	50- 60	782.8	3840	79.6,79.6
70	489.9	485.6	445.2	420.0	373.4	399.9	473.4	464.4	60- 70	584.3	4424	91.8,91.8
80	209.4	203.7	165.8	149.5	111.9	131.9	188.1	183.8	70- 80	318.6	4743	98.4,98.4
90	6.719	4.167	0.2424	0.2226	0.1988	0.2179	0.2181	1.066	80- 90	73.36	4816	99.9,99.9
100	0.3026	0.3538	0.3489	0.3725	0.3828	0.3607	0.3373	0.3843	90-100	0.4139	4816	99.9,99.9
110	0.4818	0.5306	0.5525	0.5877	0.6302	0.5786	0.5337	0.5585	100-110	0.4812	4817	99.9,99.9
120	0.7095	0.7171	0.7950	0.8247	0.9547	0.8136	0.7567	0.7760	110-120	0.6653	4818	99.9,99.9
130	0.9566	0.9085	1.001	1.042	1.175	1.044	0.9702	0.9284	120-130	0.8032	4818	99.9,99.9
140	1.189	1.131	1.251	1.258	1.422	1.271	1.176	1.139	130-140	0.8608	4819	100,100
150	1.497	1.364	1.474	1.475	1.662	1.470	1.438	1.335	140-150	0.8444	4820	100,100
160	1.737	1.579	1.641	1.666	1.919	1.657	1.615	1.547	150-160	0.7251	4821	100,100
170	1.778	1.670	1.741	1.799	2.074	1.901	1.724	1.664	160-170	0.4894	4821	100,100
180	1.948	1.817	1.828	1.864	1.940	1.817	1.816	1.874	170-180	0.1740	4822	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

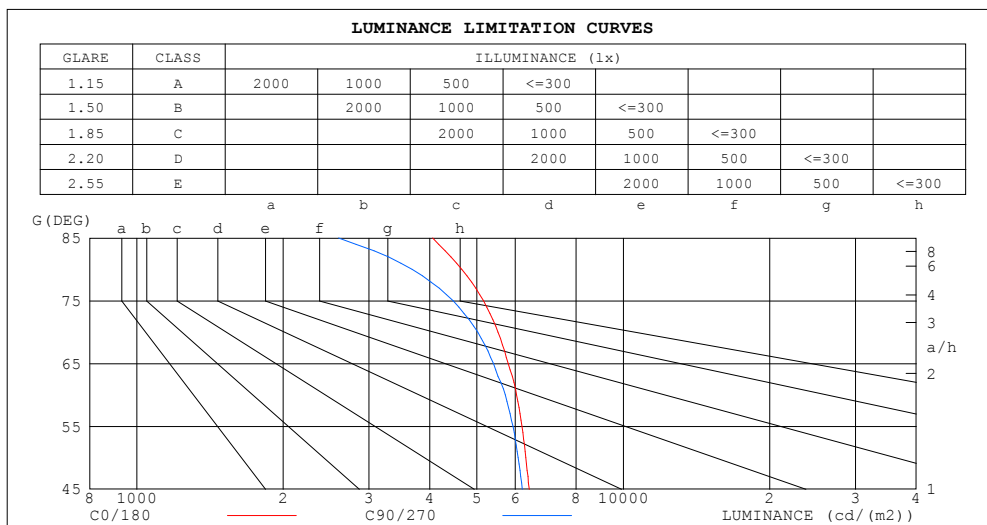

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4054	2596
80	4654	3681
75	5162	4466
70	5529	5020
65	5799	5408
60	6038	5718
55	6191	5932
50	6303	6081
45	6406	6201


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.42	.56	.47	.41	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

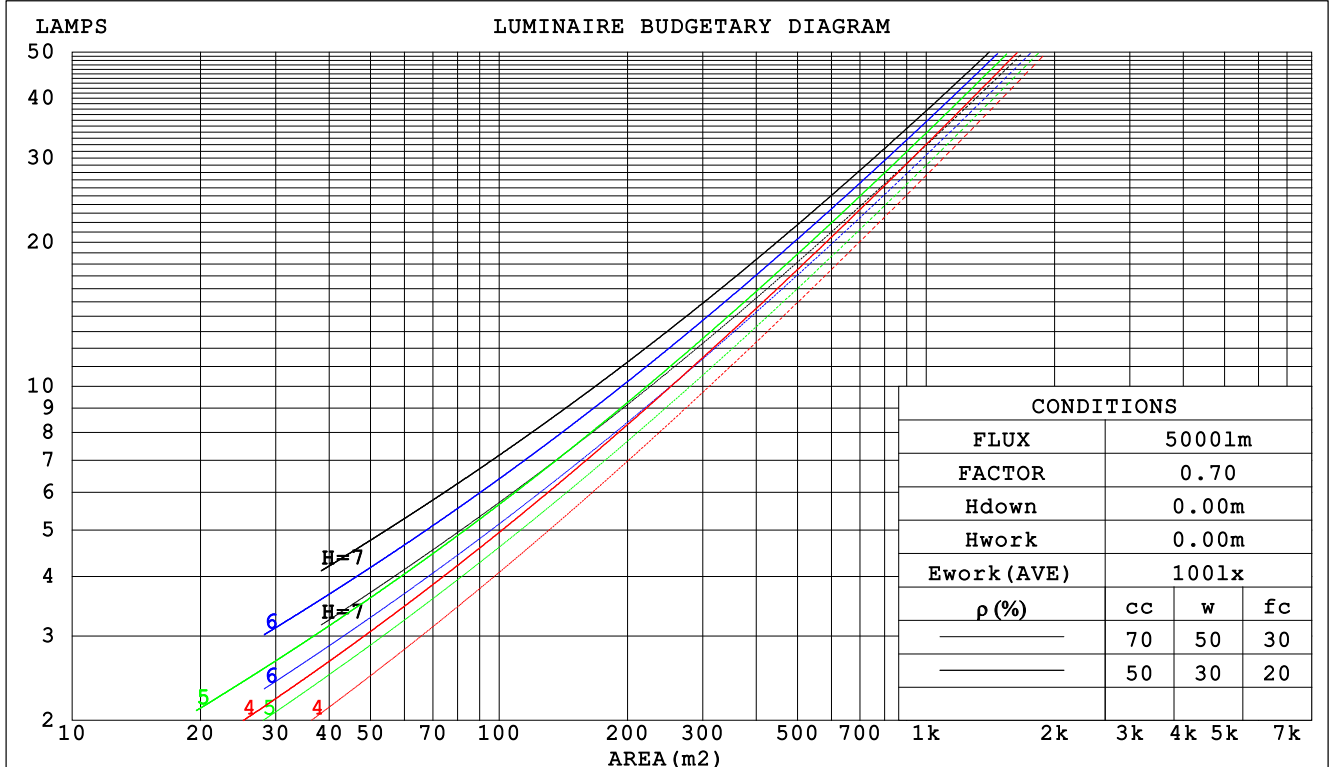

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.303	.173	.055	.296	.169	.054	.283	.162	.052	.271	.156	.050	.260	.150	.048		
2.0	.287	.158	.048	.281	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.041	.233	.129	.040		
4.0	.247	.128	.038	.242	.127	.037	.233	.123	.037	.224	.120	.036	.216	.118	.036		
5.0	.229	.117	.034	.224	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032		
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029		
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.076	.141	.099	.066	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.060	.135	.088	.052	.093	.061	.036	.054	.036	.022	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.129	.070	.030	.111	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.070	.037	.014	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm										
NAME: 净化灯					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0825*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions										
Viewed crosswise						Viewed endwise				
x = 2H y = 2H	19.4	20.9	19.6	21.1	21.3	19.2	20.7	19.4	20.9	21.1
3H	20.9	22.3	21.2	22.5	22.8	20.6	22.0	20.9	22.2	22.5
4H	21.5	22.9	21.8	23.1	23.4	21.2	22.5	21.5	22.7	23.0
6H	22.0	23.2	22.3	23.5	23.8	21.5	22.7	21.8	23.0	23.3
8H	22.1	23.3	22.5	23.6	23.9	21.6	22.8	21.9	23.1	23.4
12H	22.2	23.4	22.6	23.7	24.0	21.6	22.8	22.0	23.1	23.4
4H 2H	20.0	21.3	20.3	21.6	21.8	19.8	21.2	20.1	21.4	21.7
3H	21.7	22.9	22.1	23.2	23.5	21.5	22.6	21.8	22.9	23.2
4H	22.4	23.5	22.8	23.8	24.2	22.1	23.2	22.5	23.5	23.8
6H	23.0	24.0	23.4	24.3	24.7	22.6	23.5	23.0	23.9	24.2
8H	23.2	24.1	23.6	24.5	24.8	22.7	23.6	23.1	23.9	24.3
12H	23.3	24.1	23.8	24.5	24.9	22.8	23.6	23.2	24.0	24.4
8H 4H	22.7	23.6	23.1	23.9	24.3	22.4	23.3	22.8	23.7	24.0
6H	23.4	24.2	23.9	24.6	25.0	23.0	23.7	23.5	24.1	24.6
8H	23.7	24.3	24.2	24.8	25.2	23.2	23.9	23.7	24.3	24.7
12H	23.9	24.5	24.4	24.9	25.4	23.3	23.9	23.8	24.3	24.8
12H 4H	22.7	23.5	23.1	23.9	24.3	22.4	23.2	22.9	23.6	24.0
6H	23.5	24.1	23.9	24.5	25.0	23.1	23.7	23.5	24.2	24.6
8H	23.8	24.3	24.3	24.8	25.3	23.3	23.9	23.8	24.3	24.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 4822 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	84	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

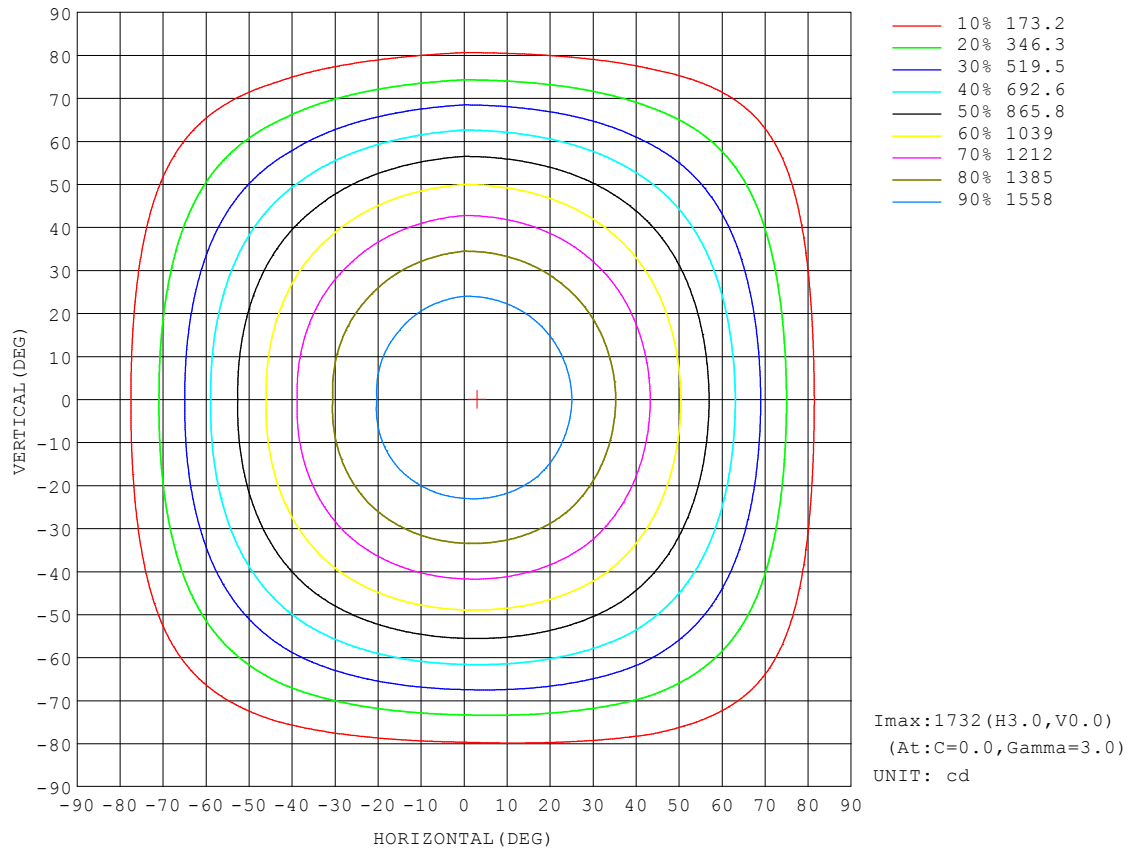


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

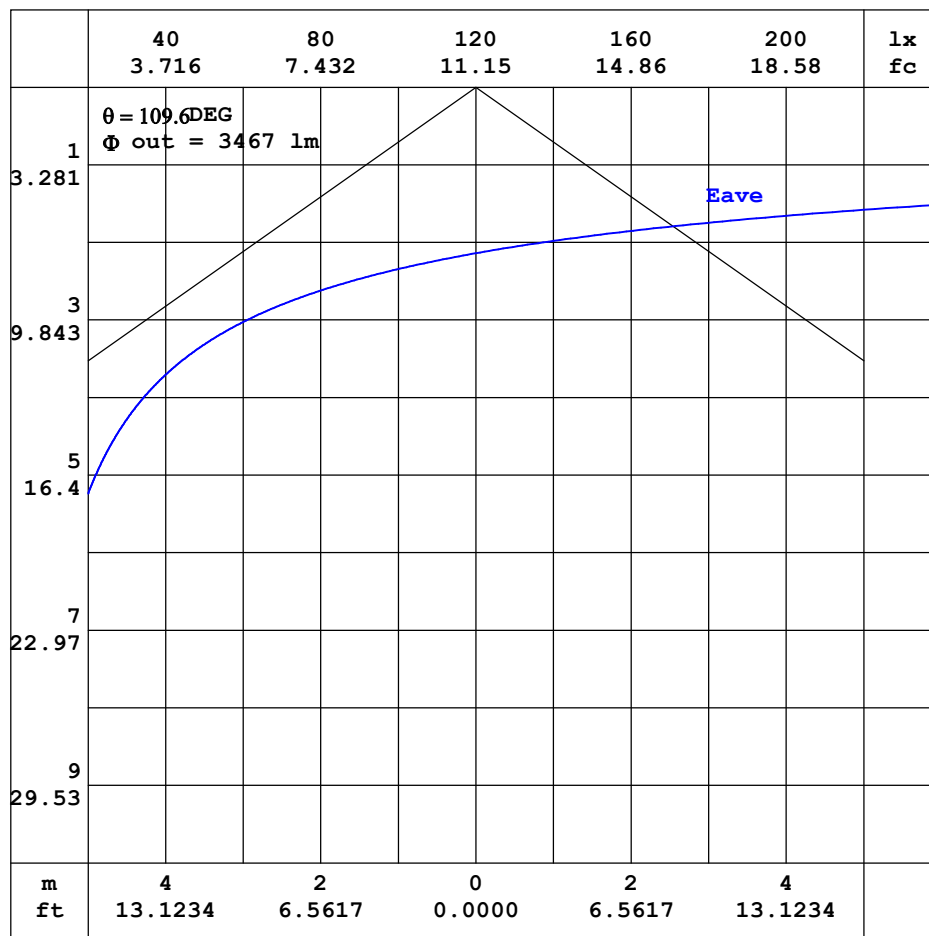


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

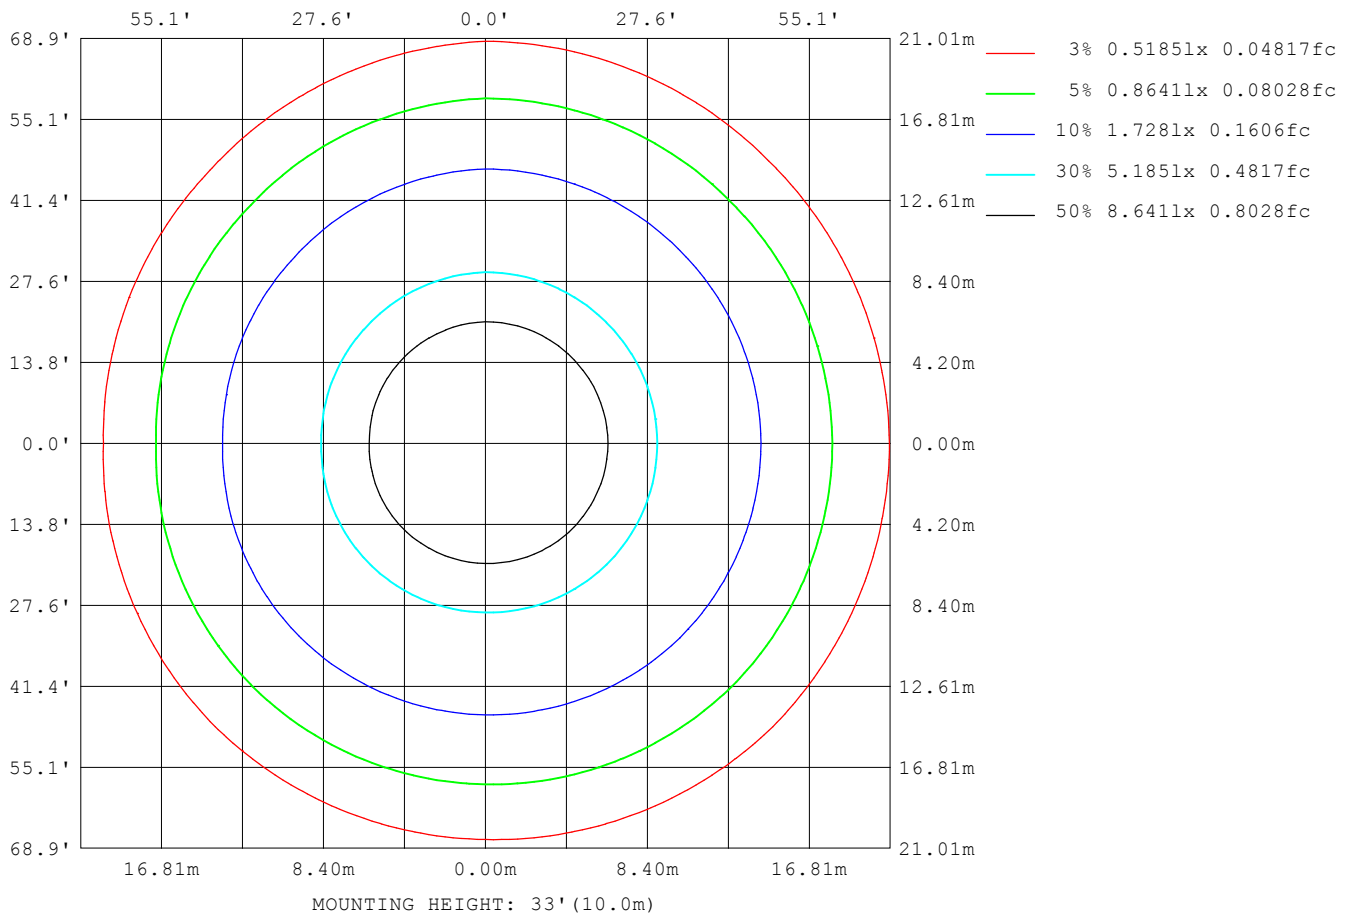

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5266
L_0~180 (75) av	4337
L_0~180 (85) av	2413
L_90~270 (65) av	5554
L_90~270 (75) av	4659
L_90~270 (85) av	2876
L_45 (65) av	5382
L_45 (75) av	4467
L_45 (85) av	2599

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

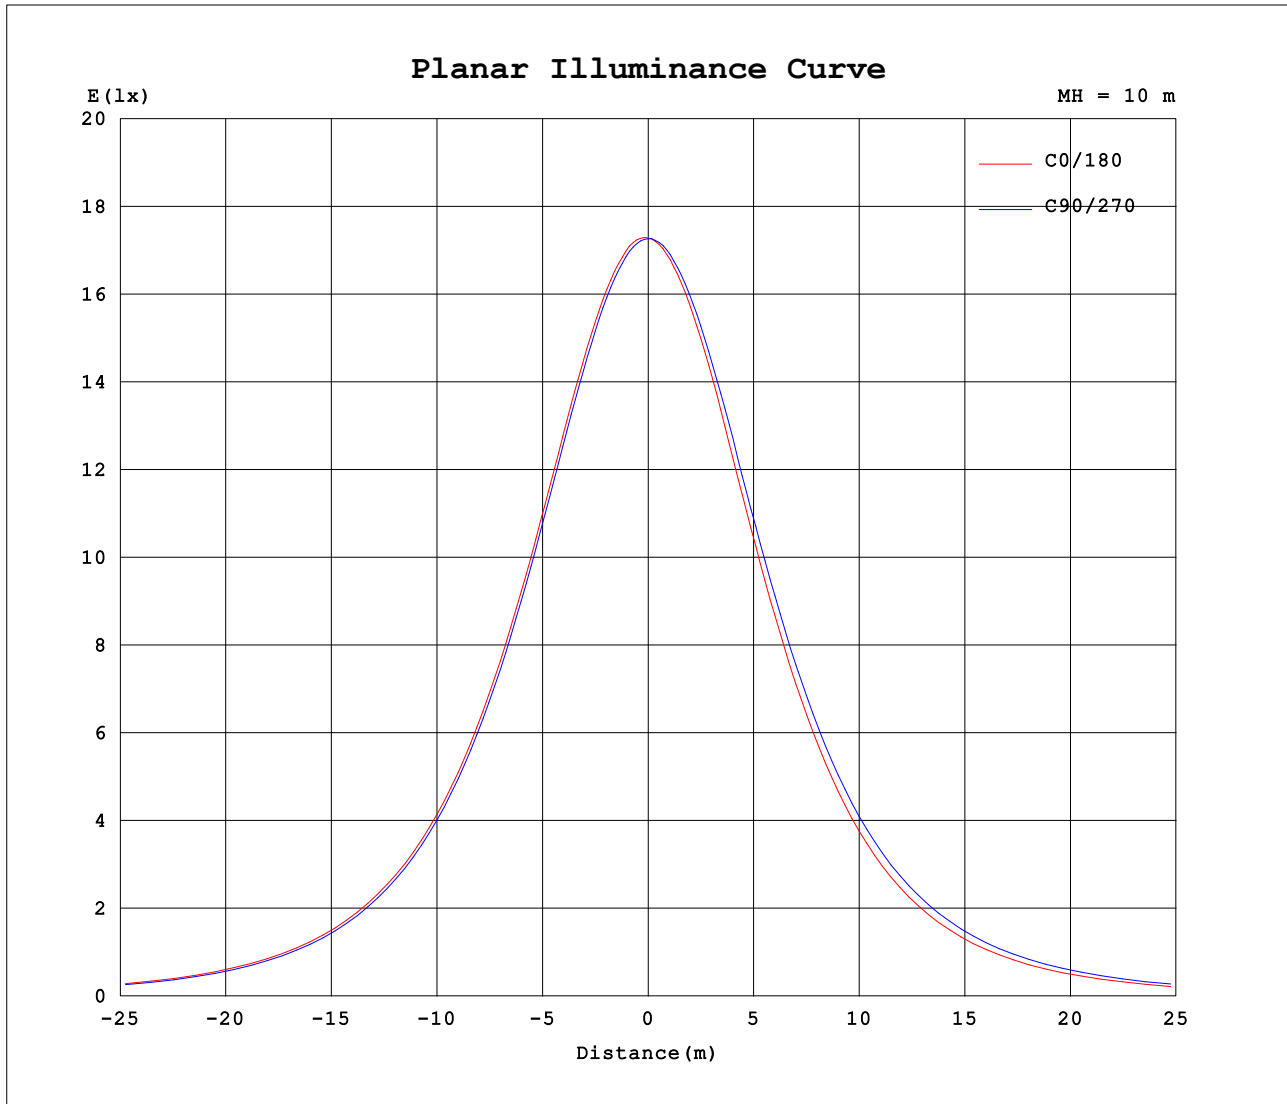

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.2960A P:35.70W PF:0.9980 Freq:50.00Hz Lamp Flux:4821.53x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1729	1729	1729	1729	1729	1729	1729	1729										
5	1731	1726	1720	1716	1712	1716	1723	1724										
10	1710	1707	1694	1688	1679	1686	1702	1703										
15	1677	1671	1653	1645	1632	1643	1666	1667										
20	1626	1621	1599	1588	1563	1583	1615	1615										
25	1560	1552	1531	1510	1485	1510	1545	1549										
30	1481	1474	1450	1426	1396	1425	1467	1469										
35	1391	1383	1357	1330	1296	1326	1376	1376										
40	1286	1281	1252	1224	1185	1217	1274	1272										
45	1174	1168	1137	1107	1064	1099	1161	1157										
50	1050	1045	1014	981	935	972	1038	1033										
55	920	914	882	849	801	838	906	901										
60	782	777	741	709	662	695	768	761										
65	635	633	593	565	518	546	623	612										
70	490	486	445	420	373	400	473	464										
75	346	341	300	279	235	259	325	319										
80	209	204	166	149	112	132	188	184										
85	91.5	84.2	58.7	44.1	17.4	33.7	71.2	72.7										
90	6.72	4.17	0.24	0.22	0.20	0.22	0.22	1.07										
95	0.23	0.29	0.28	0.29	0.27	0.27	0.25	0.30										
100	0.30	0.35	0.35	0.37	0.38	0.36	0.34	0.38										
105	0.40	0.45	0.45	0.51	0.49	0.46	0.43	0.47										
110	0.48	0.53	0.55	0.59	0.63	0.58	0.53	0.56										
115	0.59	0.62	0.67	0.70	0.75	0.69	0.65	0.68										
120	0.71	0.72	0.79	0.82	0.95	0.81	0.76	0.78										
125	0.82	0.81	0.89	0.92	1.08	0.93	0.86	0.87										
130	0.96	0.91	1.00	1.04	1.18	1.04	0.97	0.93										
135	1.03	1.01	1.13	1.15	1.31	1.15	1.07	1.04										
140	1.19	1.13	1.25	1.26	1.42	1.27	1.18	1.14										
145	1.38	1.25	1.37	1.37	1.55	1.38	1.26	1.24										
150	1.50	1.36	1.47	1.48	1.66	1.47	1.44	1.33										
155	1.65	1.48	1.56	1.56	1.79	1.56	1.54	1.46										
160	1.74	1.58	1.64	1.67	1.92	1.66	1.62	1.55										
165	1.73	1.64	1.71	1.74	2.02	1.74	1.68	1.62										
170	1.78	1.67	1.74	1.80	2.07	1.90	1.72	1.66										
175	1.79	1.70	1.77	1.86	2.03	1.89	1.84	1.77										
180	1.95	1.82	1.83	1.86	1.94	1.82	1.82	1.87										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: