


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 139.95 lm/W			
MODEL	1X4	I _{max} (cd)	1788	S/MH(C0/180)	1.21
NOMINAL POWER(W)	36W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4982.2	η UP,DN(C0-180)	0.1,50.8
NOMINAL FLUX(lm)	4982.15	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.1
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

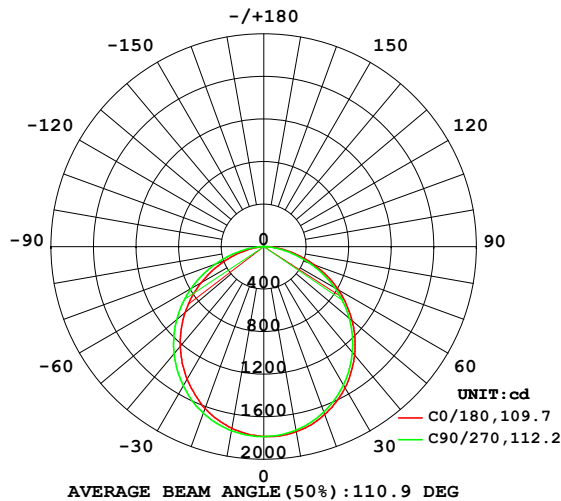

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

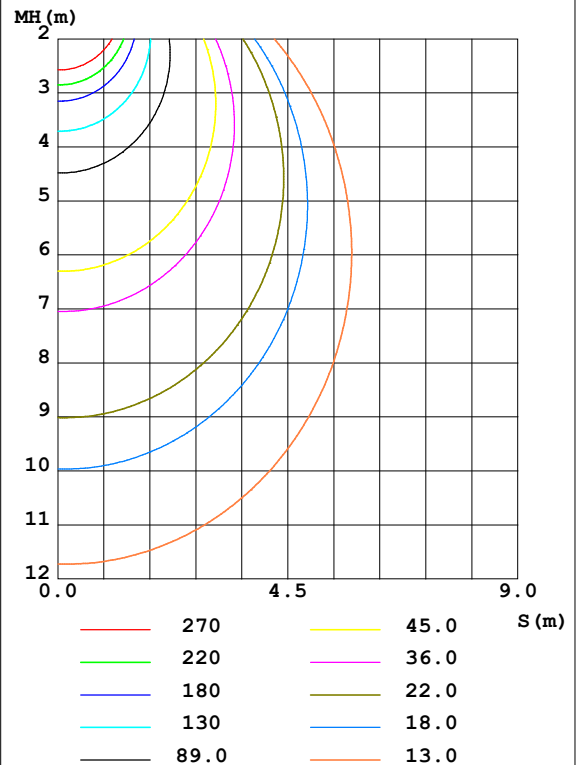

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1766	1764	1751	1745	1734	1741	1756	1760	0- 10	168.8	168.8	3.39,3.39
20	1679	1677	1655	1641	1618	1633	1666	1667	10- 20	482.8	651.6	13.1,13.1
30	1530	1524	1501	1476	1441	1468	1512	1517	20- 30	729.0	1381	27.7,27.7
40	1329	1326	1297	1267	1224	1254	1313	1313	30- 40	874.8	2255	45.3,45.3
50	1085	1082	1050	1017	966.3	1001	1069	1067	40- 50	902.8	3158	63.4,63.4
60	809.6	804.6	769.1	735.1	682.7	715.5	791.2	786.4	50- 60	808.8	3967	79.6,79.6
70	507.2	504.0	461.8	435.6	385.4	411.0	488.0	480.1	60- 70	604.1	4571	91.7,91.7
80	216.4	212.8	171.7	154.1	115.4	135.5	193.8	190.9	70- 80	329.4	4900	98.4,98.4
90	7.001	4.383	0.2645	0.2543	0.2371	0.2399	0.2493	1.305	80- 90	75.86	4976	99.9,99.9
100	0.3289	0.3832	0.3752	0.4022	0.4091	0.3975	0.3731	0.4019	90-100	0.4490	4977	99.9,99.9
110	0.5296	0.5674	0.5929	0.6227	0.6923	0.6348	0.5669	0.5981	100-110	0.5151	4977	99.9,99.9
120	0.7643	0.7638	0.8255	0.8576	1.036	0.8773	0.8090	0.8281	110-120	0.7113	4978	99.9,99.9
130	1.026	0.9674	1.058	1.097	1.288	1.122	1.032	0.9855	120-130	0.8593	4979	99.9,99.9
140	1.289	1.198	1.317	1.332	1.568	1.374	1.238	1.199	130-140	0.9200	4980	100,100
150	1.611	1.447	1.550	1.557	1.810	1.588	1.536	1.409	140-150	0.9027	4981	100,100
160	1.825	1.670	1.736	1.758	2.076	1.784	1.712	1.632	150-160	0.7727	4981	100,100
170	1.870	1.779	1.852	1.897	2.236	2.050	1.831	1.746	160-170	0.5202	4982	100,100
180	2.083	1.959	1.961	2.015	2.095	1.956	1.952	1.998	170-180	0.1857	4982	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

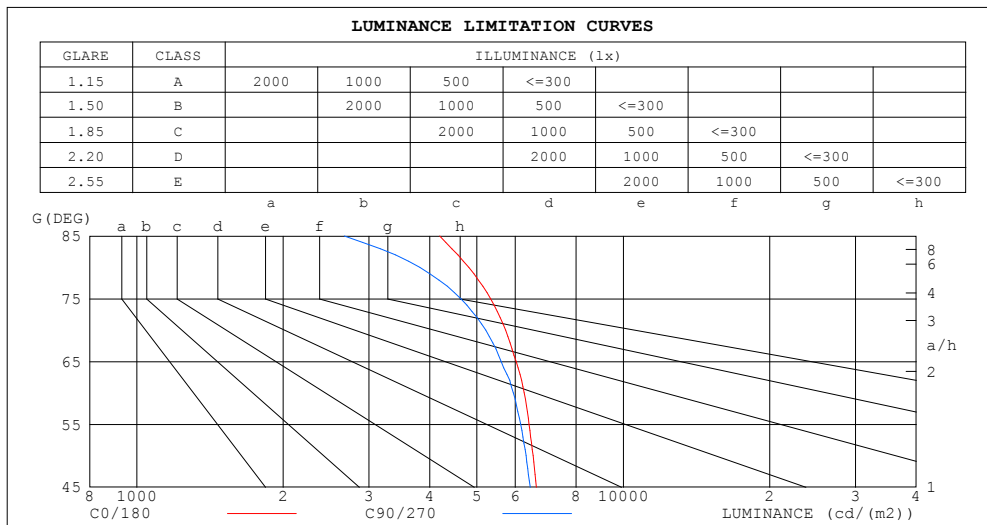

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4193	2669
80	4816	3819
75	5338	4638
70	5731	5214
65	6021	5611
60	6258	5940
55	6403	6152
50	6526	6310
45	6627	6439


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.41	.56	.47	.41	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

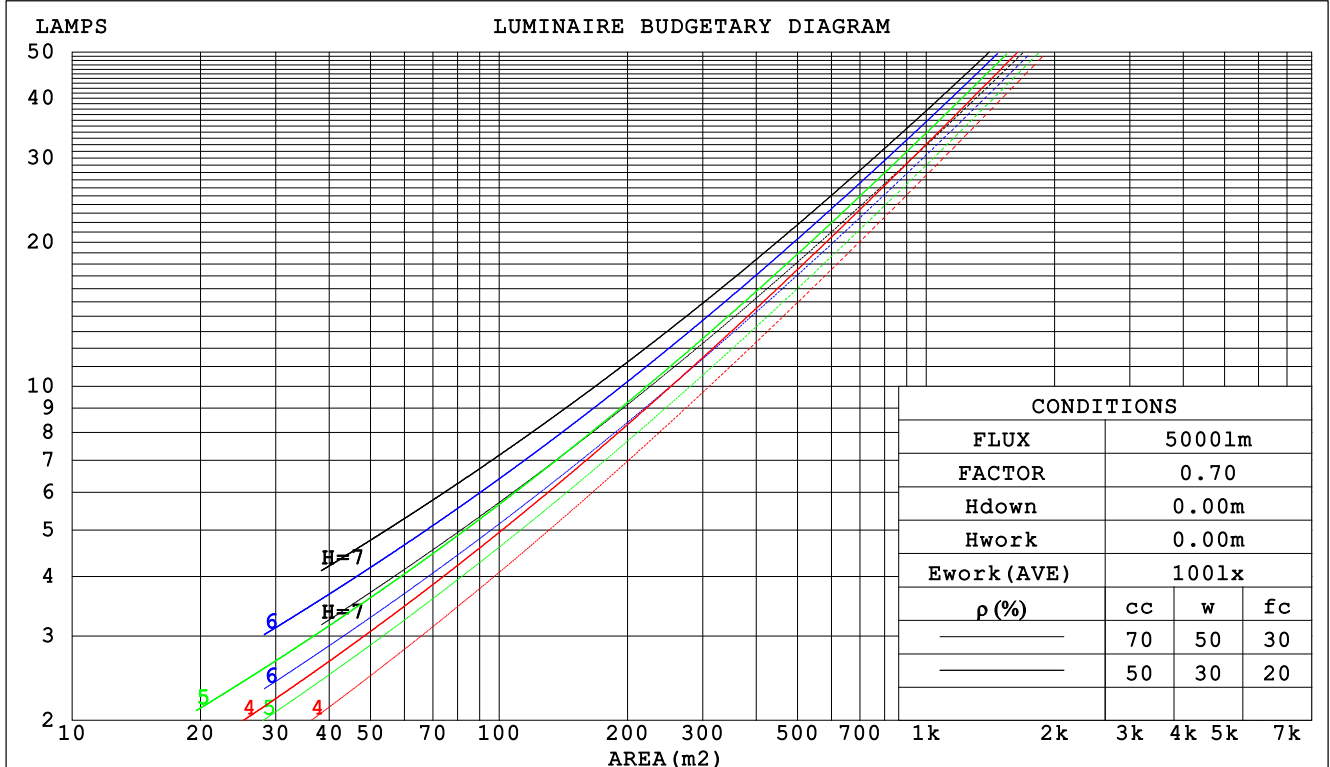

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.303	.173	.055	.296	.169	.054	.283	.162	.052	.271	.156	.050	.260	.150	.049		
2.0	.288	.158	.048	.281	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.242	.132	.041	.233	.129	.040		
4.0	.247	.128	.038	.242	.127	.037	.233	.124	.037	.224	.120	.036	.216	.118	.036		
5.0	.229	.117	.034	.224	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032		
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029		
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.076	.141	.099	.066	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.060	.135	.088	.052	.093	.061	.036	.054	.036	.022	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.070	.030	.111	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm										
NAME: 净化灯					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0825*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.5	21.0	19.8	21.2	21.4	19.3	20.8	19.6	21.0	21.2
3H	21.0	22.4	21.3	22.7	22.9	20.8	22.2	21.1	22.4	22.6
4H	21.7	23.0	22.0	23.2	23.5	21.3	22.6	21.6	22.9	23.1
6H	22.1	23.4	22.4	23.6	23.9	21.6	22.9	22.0	23.2	23.4
8H	22.2	23.5	22.6	23.7	24.0	21.7	22.9	22.1	23.2	23.5
12H	22.3	23.5	22.7	23.8	24.1	21.7	22.9	22.1	23.2	23.5
4H 2H	20.1	21.4	20.4	21.7	21.9	20.0	21.3	20.3	21.5	21.8
3H	21.8	23.0	22.2	23.3	23.6	21.6	22.8	22.0	23.1	23.4
4H	22.6	23.6	23.0	24.0	24.3	22.3	23.3	22.6	23.6	24.0
6H	23.1	24.1	23.5	24.4	24.8	22.7	23.7	23.1	24.0	24.4
8H	23.3	24.2	23.8	24.6	25.0	22.8	23.7	23.3	24.1	24.5
12H	23.5	24.3	23.9	24.7	25.1	22.9	23.7	23.3	24.1	24.5
8H 4H	22.8	23.7	23.3	24.1	24.5	22.6	23.4	23.0	23.8	24.2
6H	23.6	24.3	24.0	24.7	25.1	23.2	23.9	23.6	24.3	24.7
8H	23.8	24.5	24.3	24.9	25.4	23.4	24.0	23.8	24.4	24.9
12H	24.0	24.6	24.5	25.0	25.5	23.5	24.0	24.0	24.5	25.0
12H 4H	22.8	23.6	23.3	24.0	24.4	22.6	23.4	23.0	23.8	24.2
6H	23.6	24.3	24.1	24.7	25.1	23.2	23.9	23.7	24.3	24.8
8H	23.9	24.5	24.4	24.9	25.4	23.5	24.0	23.9	24.5	24.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 4982 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.6)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

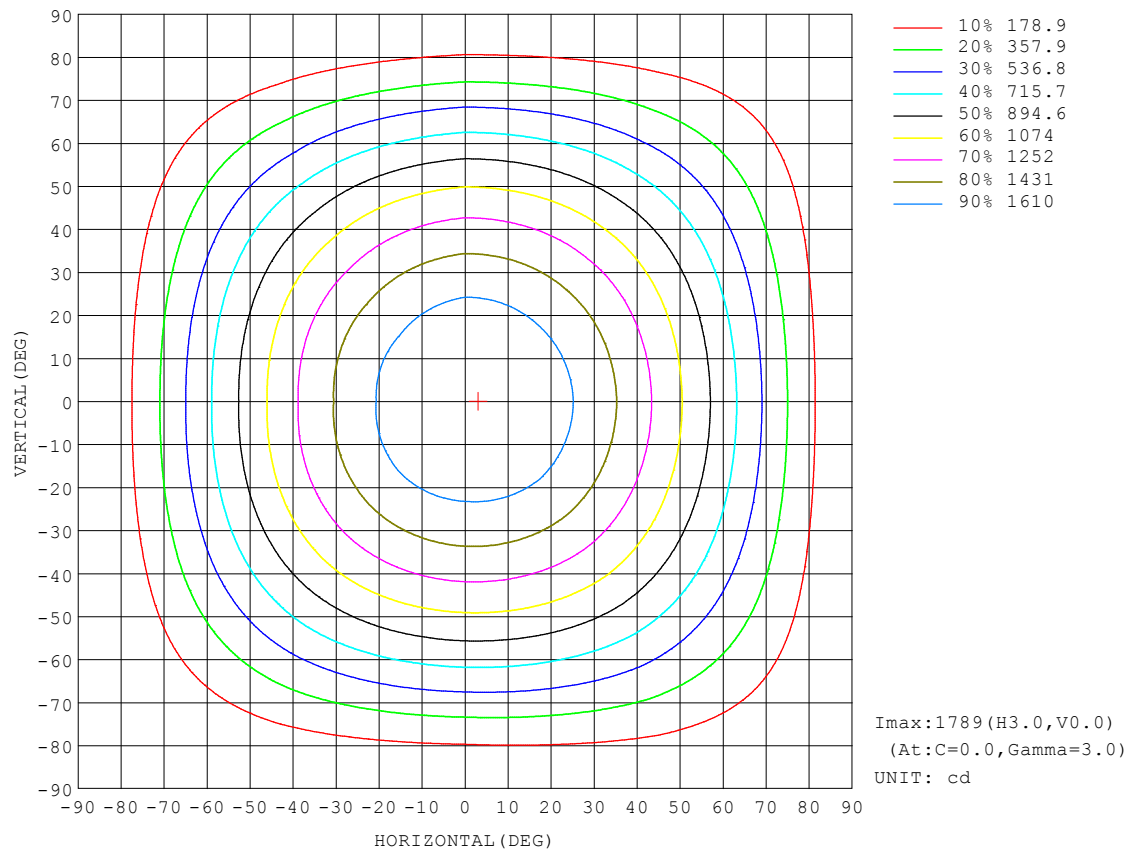


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

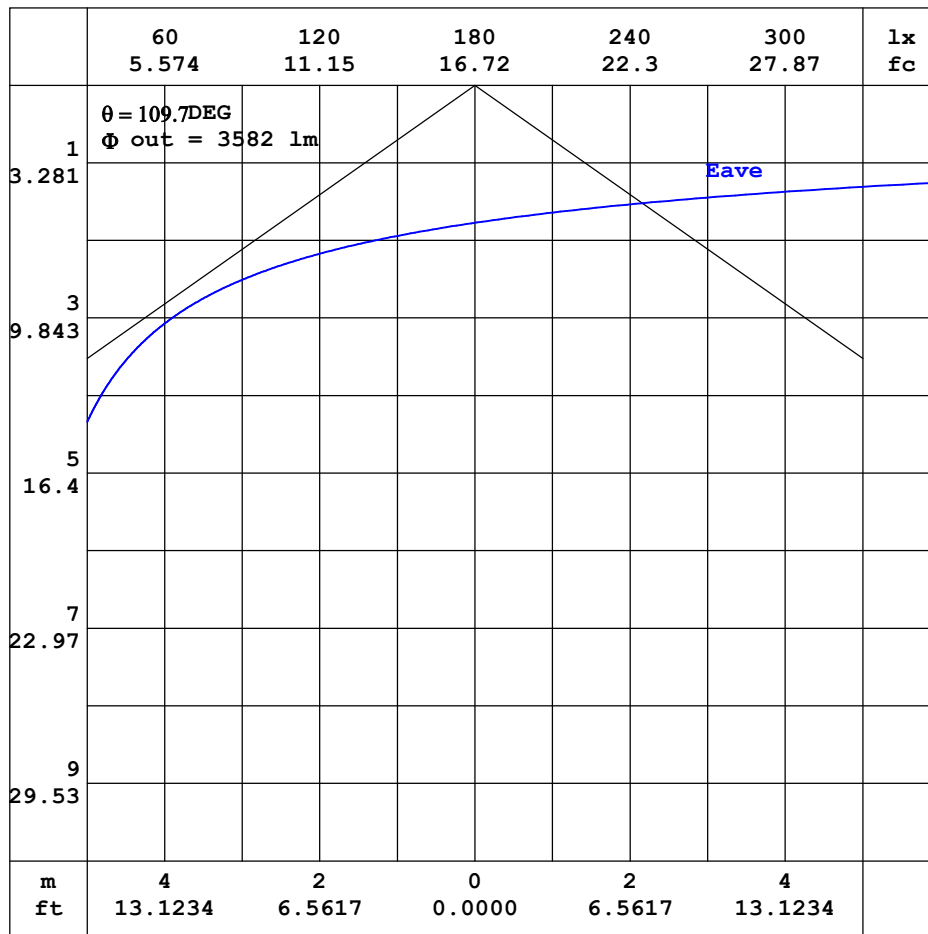


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

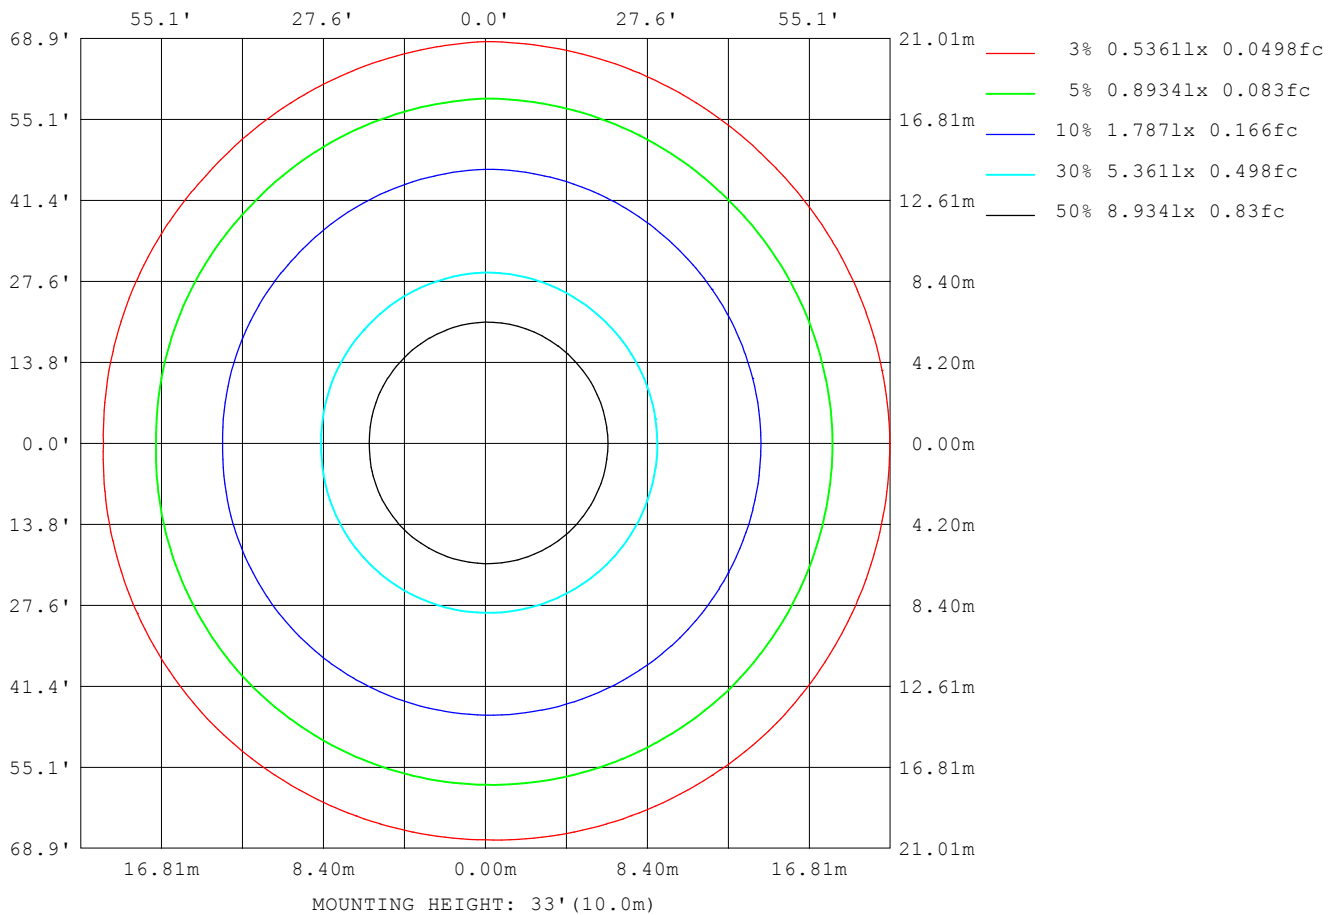

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5449
L_0~180 (75) av	4479
L_0~180 (85) av	2482
L_90~270 (65) av	5737
L_90~270 (75) av	4818
L_90~270 (85) av	2969
L_45 (65) av	5566
L_45 (75) av	4624
L_45 (85) av	2677

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

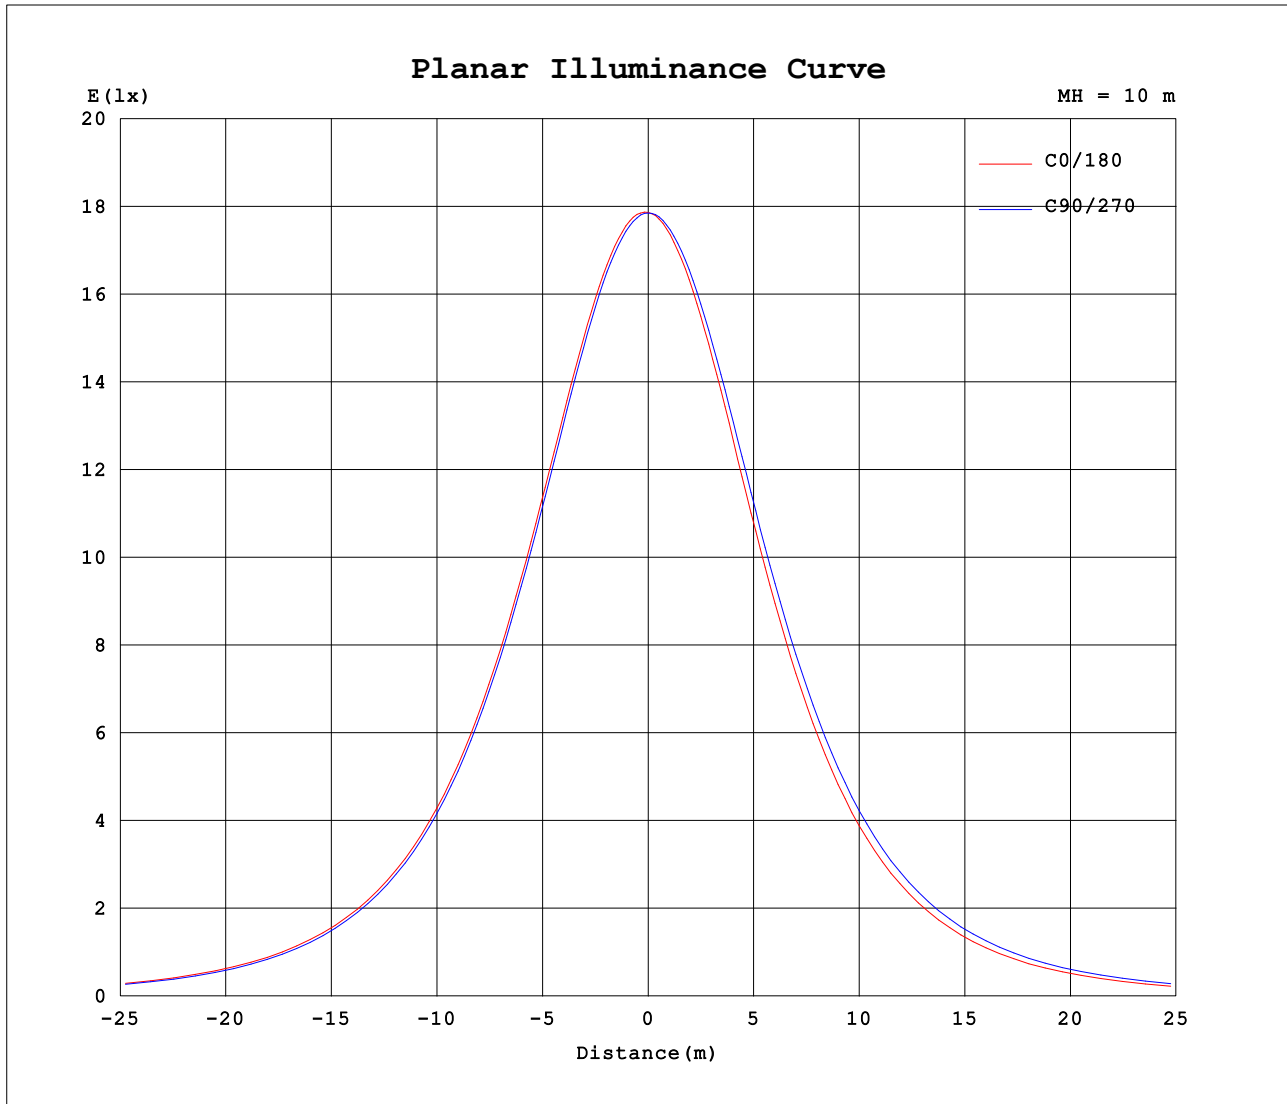

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.2960A P:35.60W PF:0.9970 Freq:50.00Hz Lamp Flux:4982.15x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1785	1785	1785	1785	1785	1785	1785	1785										
5	1785	1782	1776	1773	1768	1771	1779	1781										
10	1766	1764	1751	1745	1734	1741	1756	1760										
15	1732	1726	1711	1700	1684	1694	1719	1721										
20	1679	1677	1655	1641	1618	1633	1666	1667										
25	1611	1610	1584	1564	1534	1557	1599	1601										
30	1530	1524	1501	1476	1441	1468	1512	1517										
35	1435	1431	1405	1377	1338	1367	1418	1420										
40	1329	1326	1297	1267	1224	1254	1313	1313										
45	1213	1209	1179	1146	1098	1132	1196	1195										
50	1085	1082	1050	1017	966	1001	1069	1067										
55	950	948	914	878	828	863	934	930										
60	810	805	769	735	683	716	791	786										
65	658	656	614	587	534	562	642	633										
70	507	504	462	436	385	411	488	480										
75	358	355	311	289	243	266	335	330										
80	216	213	172	154	115	136	194	191										
85	94.6	88.1	60.2	45.0	17.5	34.3	73.8	74.4										
90	7.00	4.38	0.26	0.25	0.24	0.24	0.25	1.30										
95	0.26	0.32	0.30	0.31	0.31	0.30	0.28	0.32										
100	0.33	0.38	0.38	0.40	0.41	0.40	0.37	0.40										
105	0.42	0.48	0.48	0.55	0.53	0.51	0.46	0.50										
110	0.53	0.57	0.59	0.62	0.69	0.63	0.57	0.60										
115	0.64	0.66	0.71	0.74	0.79	0.75	0.70	0.71										
120	0.76	0.76	0.83	0.86	1.04	0.88	0.81	0.83										
125	0.89	0.86	0.94	0.97	1.17	1.00	0.92	0.95										
130	1.03	0.97	1.06	1.10	1.29	1.12	1.03	0.99										
135	1.11	1.08	1.20	1.21	1.44	1.26	1.13	1.10										
140	1.29	1.20	1.32	1.33	1.57	1.37	1.24	1.20										
145	1.50	1.33	1.44	1.44	1.70	1.51	1.33	1.31										
150	1.61	1.45	1.55	1.56	1.81	1.59	1.54	1.41										
155	1.76	1.57	1.65	1.66	1.94	1.68	1.64	1.54										
160	1.83	1.67	1.74	1.76	2.08	1.78	1.71	1.63										
165	1.81	1.74	1.81	1.84	2.17	1.86	1.79	1.71										
170	1.87	1.78	1.85	1.90	2.24	2.05	1.83	1.75										
175	1.89	1.82	1.89	1.99	2.20	2.05	1.98	1.87										
180	2.08	1.96	1.96	2.01	2.10	1.96	1.95	2.00										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: