


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 144.12 lm/W			
MODEL	1X4	I _{max} (cd)	1467	S/MH(C0/180)	1.22
NOMINAL POWER(W)	30W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4093.1	η UP,DN(C0-180)	0.1,50.7
NOMINAL FLUX(lm)	4093.1	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.2
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

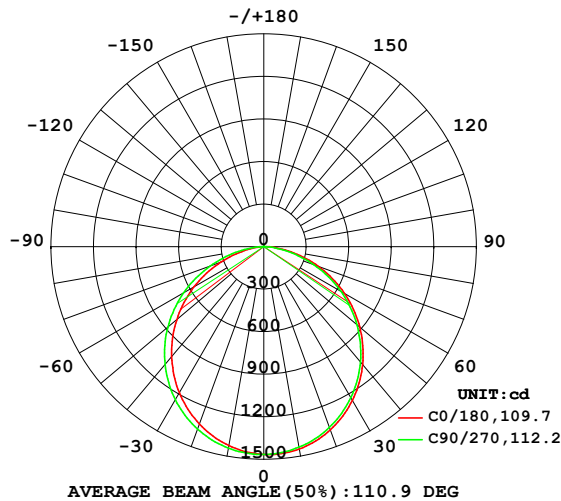

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

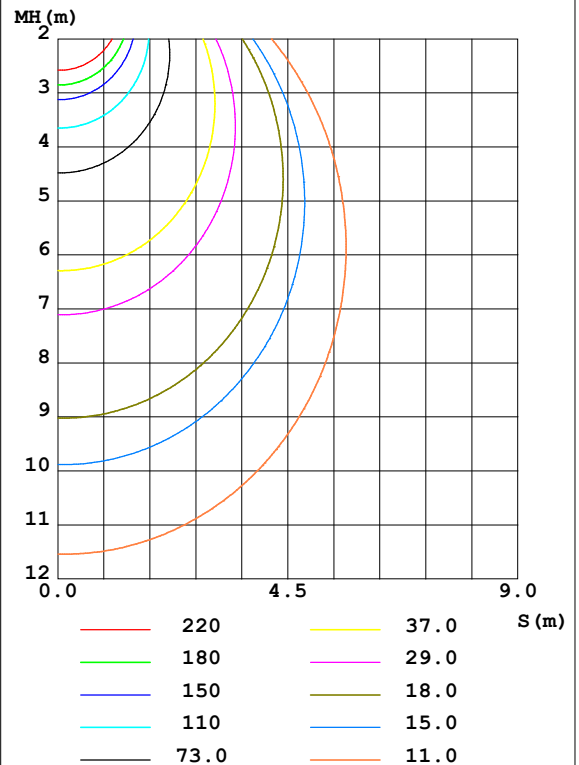

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1449	1446	1436	1433	1425	1430	1443	1443	0- 10	138.6	138.6	3.39,3.39
20	1375	1374	1356	1348	1331	1342	1369	1367	10- 20	396.2	534.8	13.1,13.1
30	1251	1252	1229	1217	1190	1208	1247	1241	20- 30	598.6	1133	27.7,27.7
40	1085	1088	1061	1045	1012	1033	1084	1074	30- 40	718.9	1852	45.3,45.3
50	884.2	887.1	858.1	839.9	800.5	825.2	882.7	870.9	40- 50	741.7	2594	63.4,63.4
60	655.9	659.2	627.0	608.2	568.1	591.2	654.2	639.8	50- 60	664.2	3258	79.6,79.6
70	411.7	411.9	377.9	362.7	323.0	343.4	404.0	391.1	60- 70	497.0	3755	91.7,91.7
80	173.5	171.4	139.7	128.8	99.37	115.3	161.2	153.6	70- 80	271.2	4026	98.4,98.4
90	4.820	3.122	0.1967	0.1838	0.1624	0.1768	0.2296	0.5095	80- 90	62.00	4088	99.9,99.9
100	0.2664	0.3077	0.3125	0.3265	0.3104	0.3075	0.2838	0.3190	90-100	0.3172	4089	99.9,99.9
110	0.4335	0.4628	0.4917	0.5104	0.5406	0.4916	0.4535	0.4810	100-110	0.4129	4089	99.9,99.9
120	0.6273	0.6323	0.6809	0.7110	0.8289	0.6974	0.6546	0.6601	110-120	0.5778	4090	99.9,99.9
130	0.8430	0.7995	0.8917	0.9021	1.021	0.9008	0.8389	0.8026	120-130	0.6993	4090	99.9,99.9
140	1.054	0.9885	1.081	1.098	1.253	1.100	1.013	0.9791	130-140	0.7513	4091	100,100
150	1.320	1.197	1.282	1.291	1.452	1.291	1.253	1.165	140-150	0.7377	4092	100,100
160	1.493	1.366	1.418	1.441	1.667	1.460	1.406	1.342	150-160	0.6327	4093	100,100
170	1.546	1.463	1.515	1.560	1.796	1.676	1.500	1.443	160-170	0.4261	4093	100,100
180	1.711	1.601	1.602	1.630	1.699	1.596	1.592	1.637	170-180	0.1518	4093	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

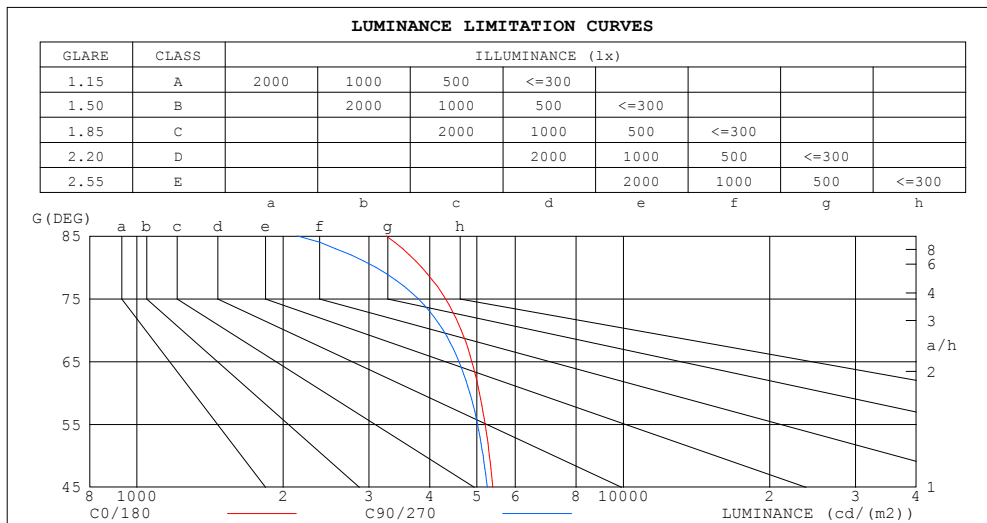

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3255	2139
80	3854	3103
75	4313	3790
70	4644	4263
65	4883	4595
60	5061	4838
55	5201	5016
50	5308	5150
45	5394	5256


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.41	.56	.47	.41	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

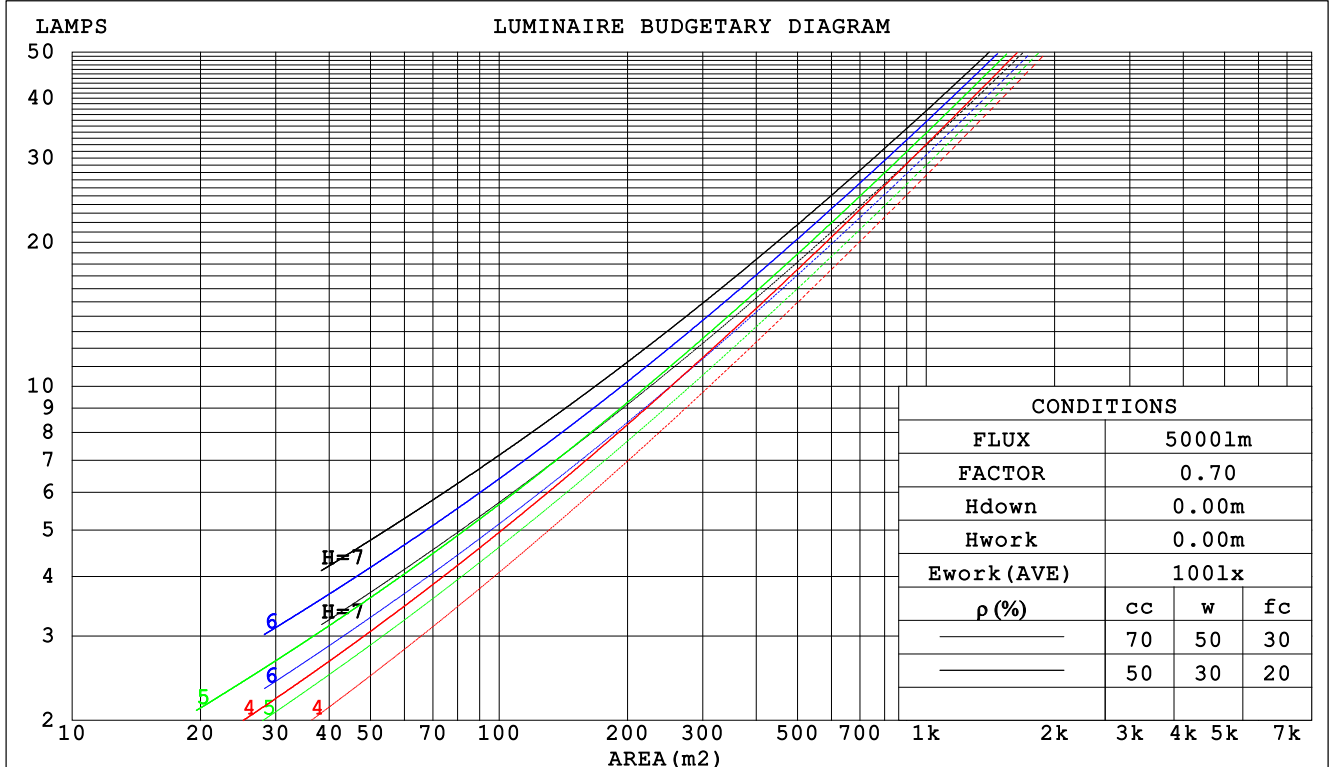

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.303	.173	.055	.296	.169	.054	.283	.162	.052	.271	.156	.050	.260	.150	.049		
2.0	.288	.158	.048	.281	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.262	.140	.042	.251	.136	.041	.242	.132	.041	.233	.129	.040		
4.0	.247	.128	.038	.242	.127	.037	.233	.124	.037	.224	.121	.036	.216	.118	.036		
5.0	.229	.117	.034	.224	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032		
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029		
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.076	.141	.099	.066	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.060	.135	.088	.052	.093	.061	.036	.054	.036	.022	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.070	.030	.111	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm										
NAME: 净化灯					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0825*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.8	20.3	19.0	20.5	20.7	18.6	20.1	18.9	20.3	20.5
3H	20.3	21.7	20.6	21.9	22.2	20.0	21.4	20.3	21.7	21.9
4H	20.9	22.2	21.2	22.5	22.7	20.6	21.9	20.9	22.2	22.4
6H	21.3	22.6	21.7	22.9	23.1	20.9	22.2	21.2	22.4	22.7
8H	21.5	22.7	21.8	23.0	23.3	21.0	22.2	21.3	22.5	22.8
12H	21.5	22.7	21.9	23.0	23.3	21.0	22.2	21.4	22.5	22.8
4H 2H	19.4	20.7	19.7	21.0	21.2	19.2	20.6	19.6	20.8	21.1
3H	21.1	22.3	21.4	22.5	22.9	20.9	22.0	21.2	22.3	22.6
4H	21.8	22.9	22.2	23.2	23.5	21.5	22.6	21.9	22.9	23.3
6H	22.4	23.3	22.8	23.7	24.0	22.0	22.9	22.4	23.3	23.7
8H	22.6	23.4	23.0	23.8	24.2	22.1	23.0	22.5	23.4	23.7
12H	22.7	23.5	23.1	23.9	24.3	22.2	23.0	22.6	23.4	23.8
8H 4H	22.1	23.0	22.5	23.3	23.7	21.8	22.7	22.2	23.1	23.5
6H	22.8	23.5	23.2	23.9	24.3	22.4	23.2	22.9	23.6	24.0
8H	23.1	23.7	23.5	24.1	24.6	22.6	23.3	23.1	23.7	24.1
12H	23.2	23.8	23.7	24.2	24.7	22.7	23.3	23.2	23.7	24.2
12H 4H	22.1	22.9	22.5	23.3	23.7	21.8	22.6	22.3	23.0	23.4
6H	22.8	23.5	23.3	23.9	24.4	22.5	23.1	22.9	23.6	24.0
8H	23.1	23.7	23.6	24.1	24.6	22.7	23.3	23.2	23.7	24.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 4093 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.9)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

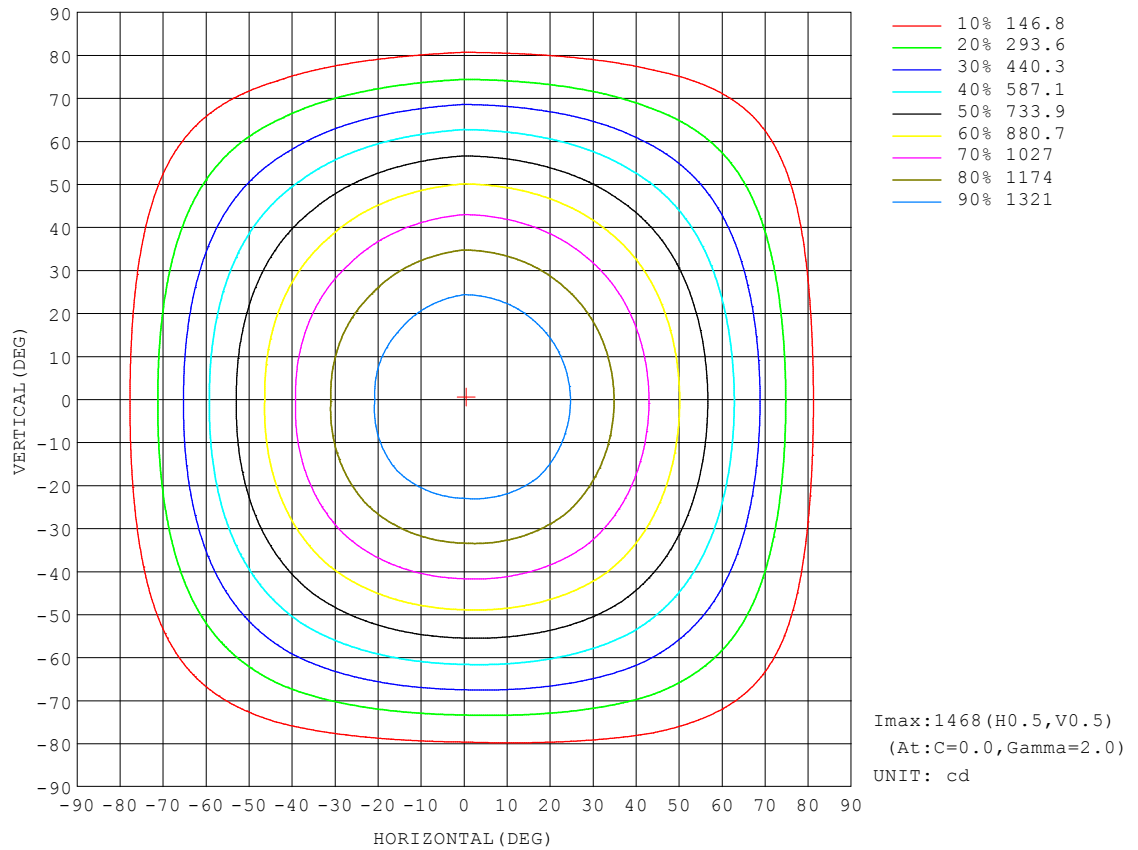


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

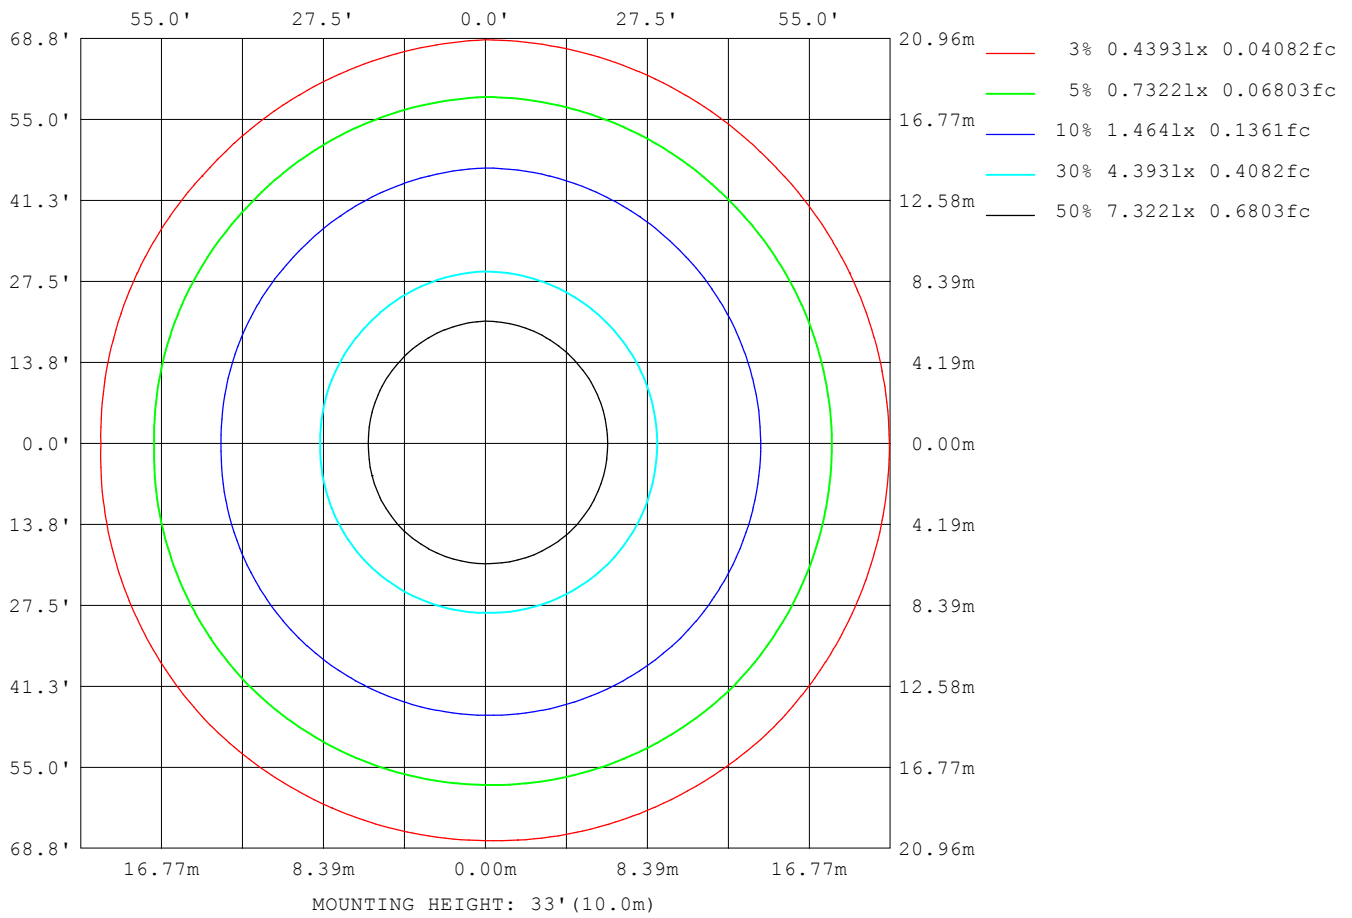

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4482
L_0~180 (75) av	3690
L_0~180 (85) av	2022
L_90~270 (65) av	4726
L_90~270 (75) av	3969
L_90~270 (85) av	2449
L_45 (65) av	4585
L_45 (75) av	3807
L_45 (85) av	2203

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

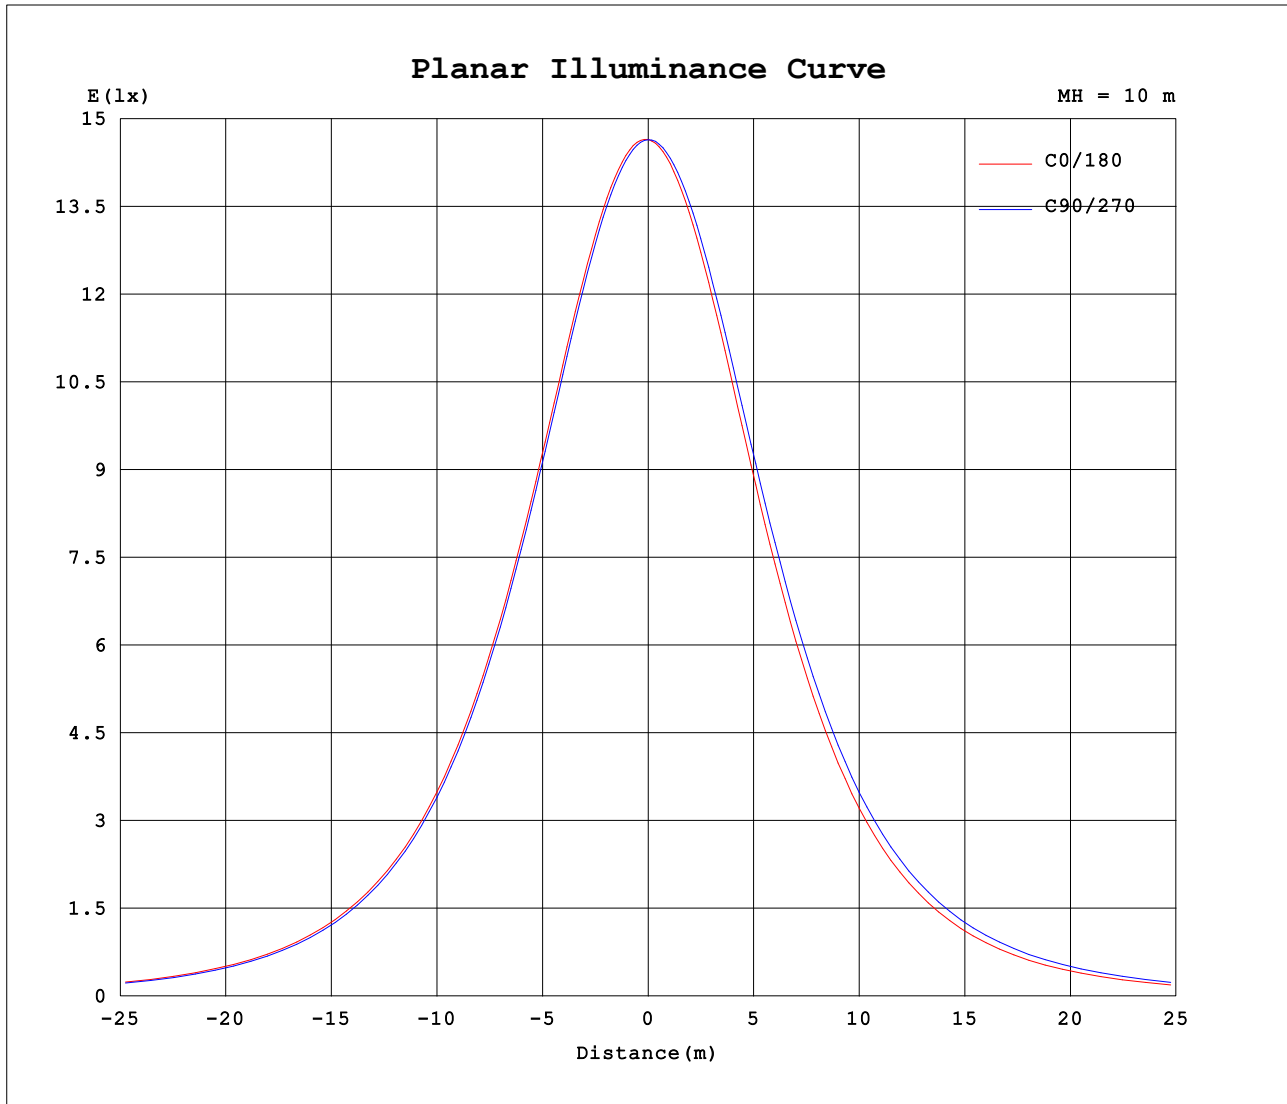

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.2350A P:28.40W PF:0.9960 Freq:50.00Hz Lamp Flux:4093.1x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1465	1465	1465	1465	1465	1465	1465	1465										
5	1464	1463	1457	1456	1452	1454	1460	1461										
10	1449	1446	1436	1433	1425	1430	1443	1443										
15	1419	1417	1402	1397	1384	1392	1412	1411										
20	1375	1374	1356	1348	1331	1342	1369	1367										
25	1319	1319	1297	1288	1266	1281	1314	1310										
30	1251	1252	1229	1217	1190	1208	1247	1241										
35	1173	1175	1150	1136	1106	1125	1170	1163										
40	1085	1088	1061	1045	1012	1033	1084	1074										
45	988	991	963	947	909	933	987	976										
50	884	887	858	840	801	825	883	871										
55	773	776	746	727	687	711	771	758										
60	656	659	627	608	568	591	654	640										
65	535	537	503	486	446	468	531	517										
70	412	412	378	363	323	343	404	391										
75	289	288	254	242	205	223	278	268										
80	173	171	140	129	99.4	115	161	154										
85	73.5	69.6	48.3	39.7	17.8	30.6	62.3	59.1										
90	4.82	3.12	0.20	0.18	0.16	0.18	0.23	0.51										
95	0.20	0.24	0.23	0.24	0.23	0.23	0.22	0.25										
100	0.27	0.31	0.31	0.33	0.31	0.31	0.28	0.32										
105	0.34	0.39	0.39	0.45	0.42	0.39	0.36	0.41										
110	0.43	0.46	0.49	0.51	0.54	0.49	0.45	0.48										
115	0.53	0.55	0.58	0.61	0.64	0.59	0.56	0.58										
120	0.63	0.63	0.68	0.71	0.83	0.70	0.65	0.66										
125	0.73	0.71	0.78	0.82	0.94	0.80	0.75	0.76										
130	0.84	0.80	0.89	0.90	1.02	0.90	0.84	0.80										
135	0.91	0.89	0.99	1.01	1.15	1.00	0.93	0.89										
140	1.05	0.99	1.08	1.10	1.25	1.10	1.01	0.98										
145	1.22	1.09	1.19	1.19	1.35	1.21	1.10	1.08										
150	1.32	1.20	1.28	1.29	1.45	1.29	1.25	1.17										
155	1.44	1.30	1.35	1.36	1.56	1.37	1.34	1.26										
160	1.49	1.37	1.42	1.44	1.67	1.46	1.41	1.34										
165	1.50	1.43	1.49	1.51	1.75	1.54	1.45	1.41										
170	1.55	1.46	1.51	1.56	1.80	1.68	1.50	1.44										
175	1.57	1.49	1.55	1.62	1.77	1.67	1.61	1.54										
180	1.71	1.60	1.60	1.63	1.70	1.60	1.59	1.64										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: