


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 142.41 lm/W			
MODEL	1X4	I _{max} (cd)	1475	S/MH(C0/180)	1.21
NOMINAL POWER(W)	30W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4115.7	η UP,DN(C0-180)	0.1,50.7
NOMINAL FLUX(lm)	4115.74	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.1
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

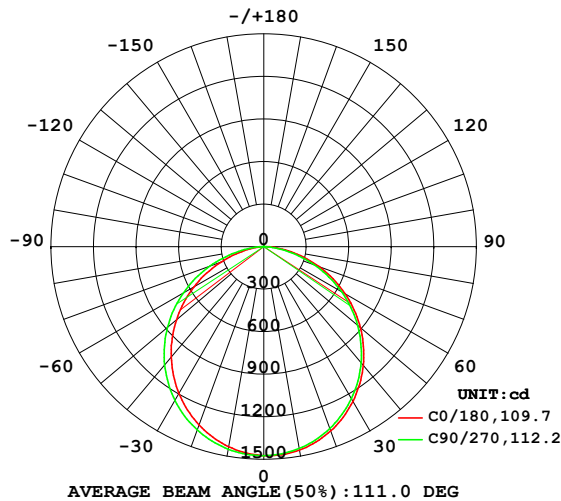

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

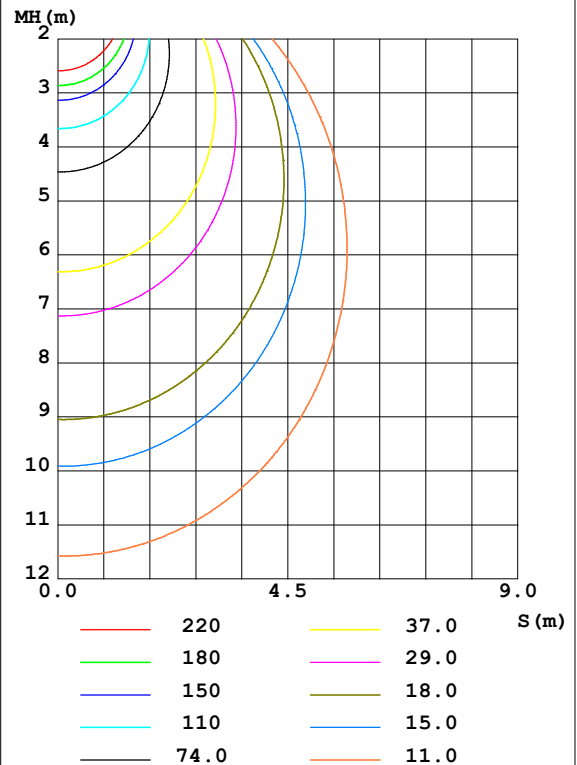

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1457	1454	1444	1440	1432	1437	1450	1451	0- 10	139.3	139.3	3.38,3.38
20	1382	1382	1364	1356	1337	1349	1375	1374	10- 20	398.3	537.7	13.1,13.1
30	1259	1260	1236	1224	1196	1213	1253	1249	20- 30	601.9	1140	27.7,27.7
40	1092	1095	1068	1051	1017	1037	1089	1079	30- 40	722.8	1862	45.3,45.3
50	890.3	893.5	864.3	844.7	803.5	828.2	886.4	875.7	40- 50	745.8	2608	63.4,63.4
60	660.6	663.1	631.3	611.3	569.9	592.9	656.2	643.7	50- 60	667.9	3276	79.6,79.6
70	415.4	414.2	381.2	364.2	323.6	343.5	405.7	393.8	60- 70	499.7	3776	91.7,91.7
80	175.7	172.9	140.7	129.3	99.02	115.6	161.9	154.8	70- 80	272.8	4049	98.4,98.4
90	4.947	3.222	0.2038	0.1887	0.1745	0.1793	0.2369	0.5591	80- 90	62.39	4111	99.9,99.9
100	0.2662	0.3103	0.3028	0.3242	0.3127	0.3027	0.2887	0.3263	90-100	0.3245	4111	99.9,99.9
110	0.4333	0.4679	0.4967	0.5177	0.5598	0.4942	0.4753	0.4835	100-110	0.4188	4112	99.9,99.9
120	0.6270	0.6326	0.6882	0.7184	0.8454	0.7074	0.6643	0.6625	110-120	0.5851	4112	99.9,99.9
130	0.8450	0.8095	0.8844	0.9215	1.056	0.9085	0.8510	0.8148	120-130	0.7090	4113	99.9,99.9
140	1.072	0.9962	1.091	1.113	1.286	1.114	1.033	0.9937	130-140	0.7614	4114	100,100
150	1.334	1.202	1.287	1.303	1.487	1.301	1.285	1.180	140-150	0.7474	4115	100,100
160	1.521	1.379	1.447	1.470	1.707	1.471	1.433	1.361	150-160	0.6404	4115	100,100
170	1.555	1.470	1.546	1.589	1.833	1.694	1.515	1.463	160-170	0.4313	4116	100,100
180	1.722	1.624	1.617	1.666	1.727	1.614	1.622	1.668	170-180	0.1536	4116	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

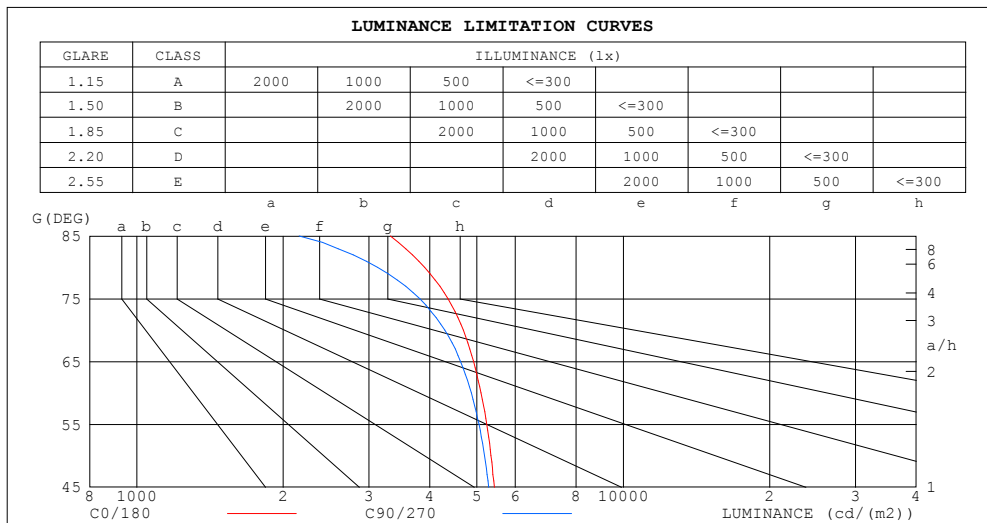

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3322	2156
80	3906	3125
75	4363	3817
70	4690	4300
65	4924	4631
60	5101	4871
55	5242	5051
50	5348	5187
45	5430	5290


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.41	.56	.47	.41	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

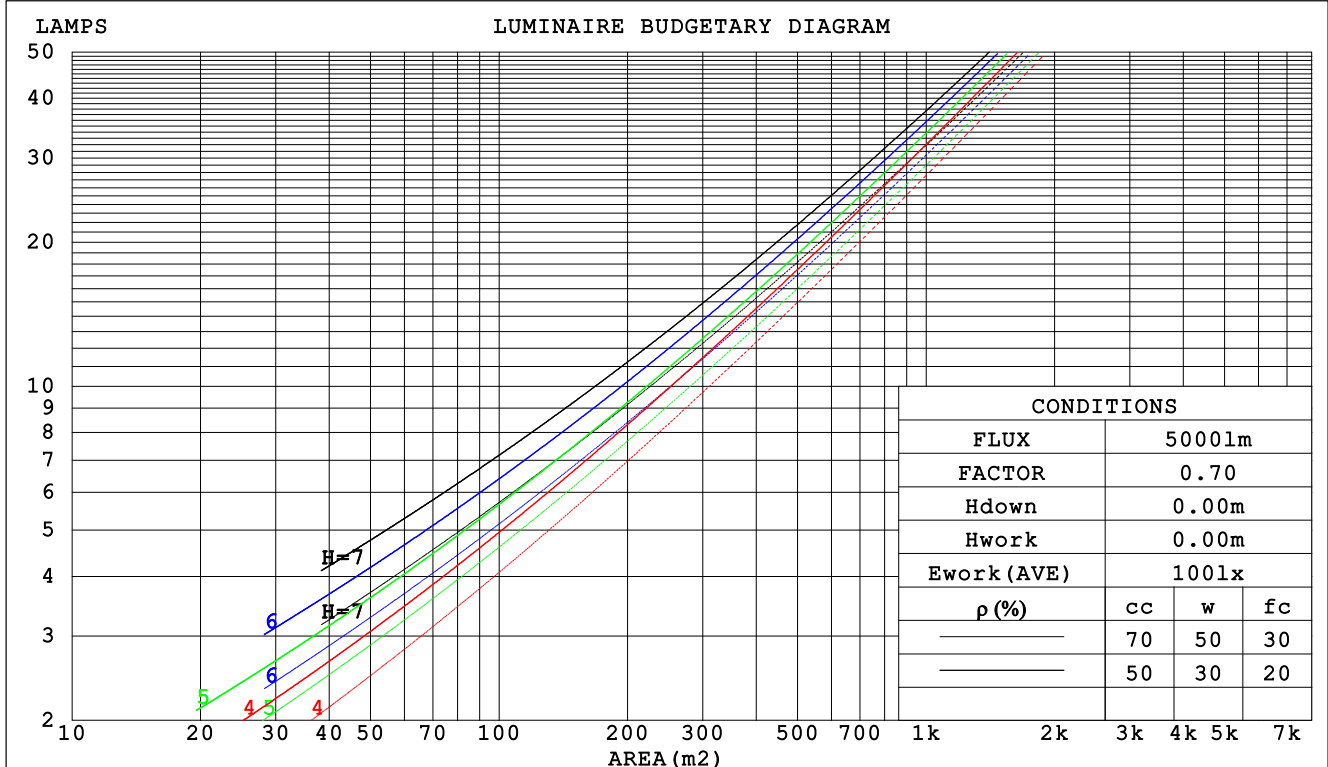

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.304	.173	.055	.296	.169	.054	.283	.162	.052	.271	.156	.050	.260	.150	.049		
2.0	.288	.158	.048	.281	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.262	.140	.042	.251	.136	.041	.242	.132	.041	.233	.129	.040		
4.0	.247	.128	.038	.242	.127	.037	.233	.124	.037	.224	.121	.036	.216	.118	.036		
5.0	.229	.117	.034	.224	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032		
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029		
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.076	.141	.099	.066	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.060	.135	.088	.052	.093	.061	.036	.054	.036	.022	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.070	.030	.111	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm										
NAME: 净化灯					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0825*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.8	20.3	19.1	20.5	20.7	18.6	20.1	18.9	20.3	20.5
3H	20.3	21.7	20.6	22.0	22.2	20.1	21.5	20.4	21.7	21.9
4H	20.9	22.3	21.3	22.5	22.8	20.6	21.9	20.9	22.2	22.4
6H	21.4	22.6	21.7	22.9	23.2	20.9	22.2	21.3	22.5	22.7
8H	21.5	22.7	21.9	23.0	23.3	21.0	22.2	21.4	22.5	22.8
12H	21.6	22.8	21.9	23.0	23.4	21.0	22.2	21.4	22.5	22.8
4H 2H	19.4	20.7	19.7	21.0	21.2	19.3	20.6	19.6	20.9	21.1
3H	21.1	22.3	21.5	22.6	22.9	20.9	22.1	21.3	22.4	22.7
4H	21.9	22.9	22.2	23.2	23.6	21.6	22.6	21.9	23.0	23.3
6H	22.4	23.4	22.8	23.7	24.1	22.0	23.0	22.4	23.3	23.7
8H	22.6	23.5	23.0	23.9	24.2	22.1	23.0	22.6	23.4	23.8
12H	22.7	23.5	23.2	23.9	24.3	22.2	23.0	22.6	23.4	23.8
8H 4H	22.1	23.0	22.5	23.4	23.8	21.9	22.7	22.3	23.1	23.5
6H	22.8	23.6	23.3	24.0	24.4	22.5	23.2	22.9	23.6	24.0
8H	23.1	23.7	23.6	24.2	24.6	22.7	23.3	23.1	23.7	24.2
12H	23.3	23.8	23.8	24.3	24.8	22.8	23.3	23.3	23.8	24.3
12H 4H	22.1	22.9	22.6	23.3	23.7	21.9	22.7	22.3	23.1	23.5
6H	22.9	23.5	23.3	23.9	24.4	22.5	23.2	23.0	23.6	24.0
8H	23.2	23.7	23.7	24.2	24.7	22.8	23.3	23.2	23.8	24.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 4116 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.9)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

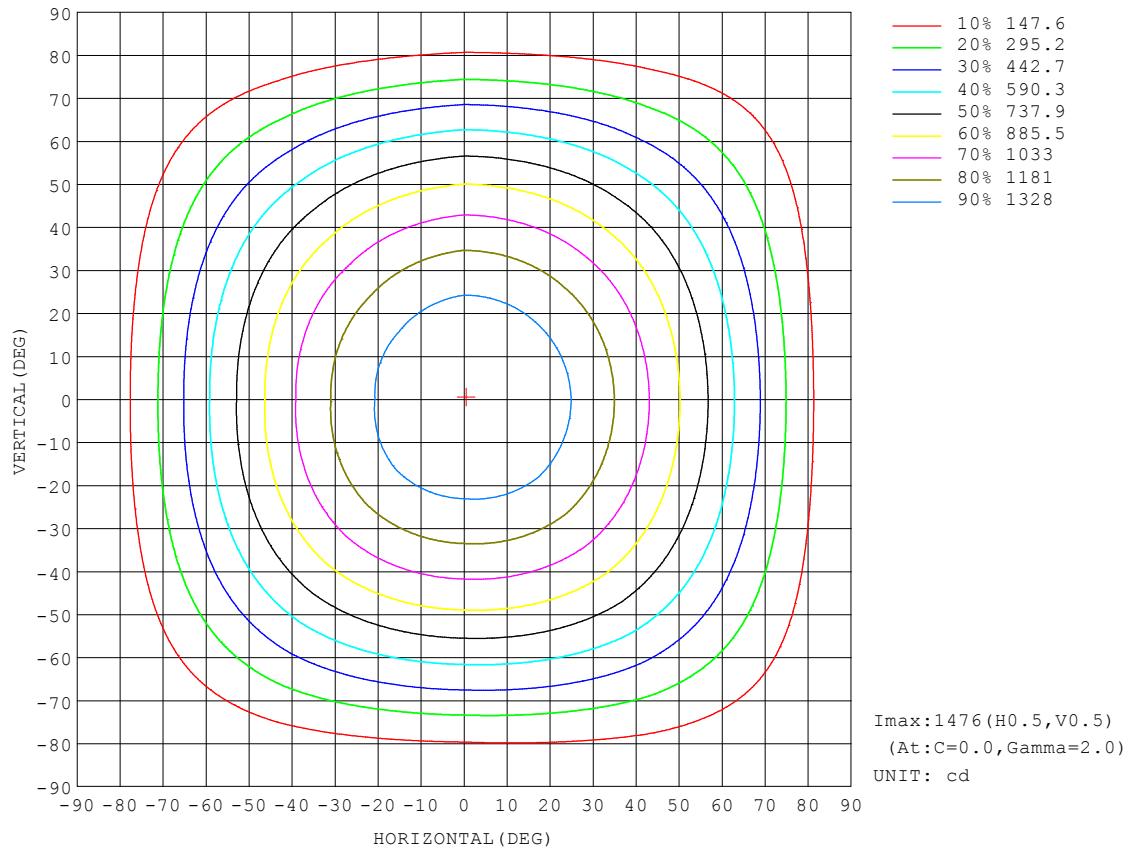


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

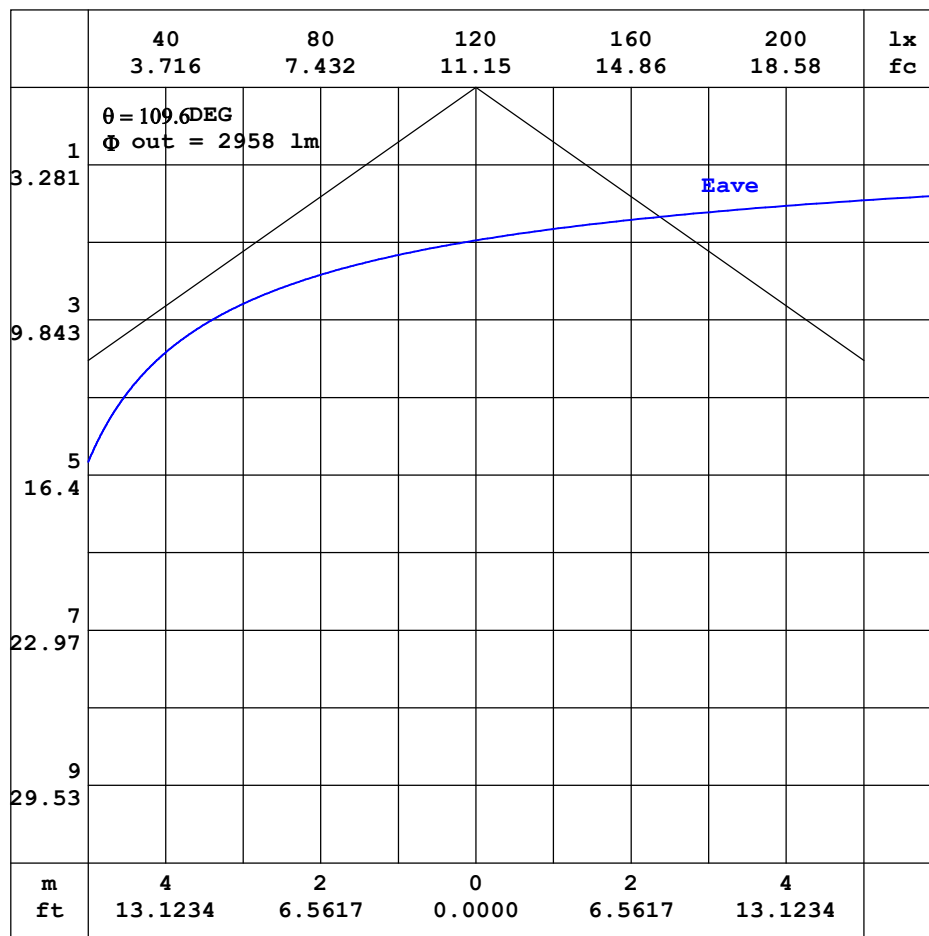


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

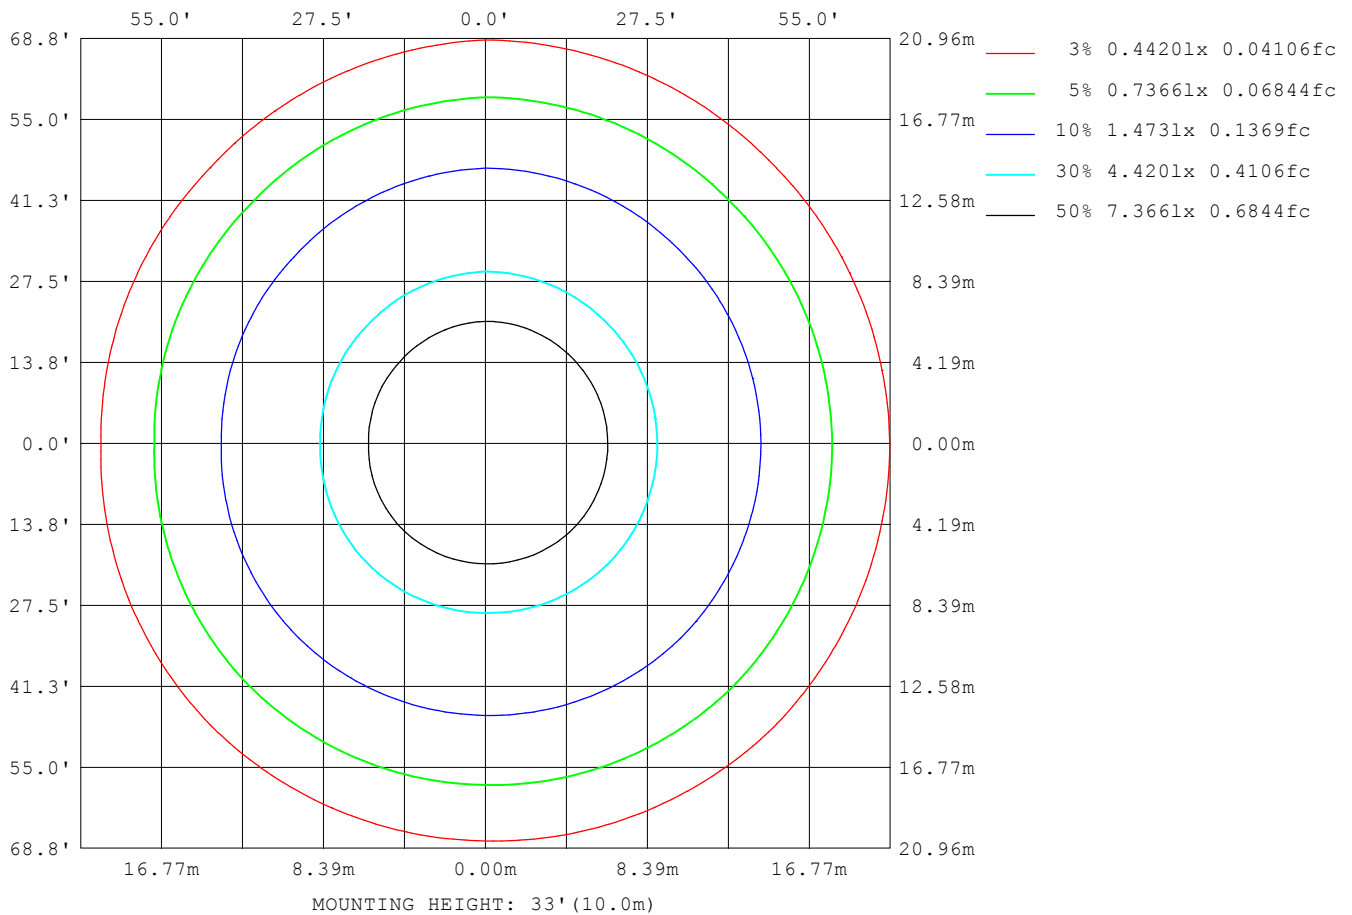

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4506
L_0~180 (75) av	3714
L_0~180 (85) av	2044
L_90~270 (65) av	4753
L_90~270 (75) av	3993
L_90~270 (85) av	2462
L_45 (65) av	4609
L_45 (75) av	3826
L_45 (85) av	2214

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

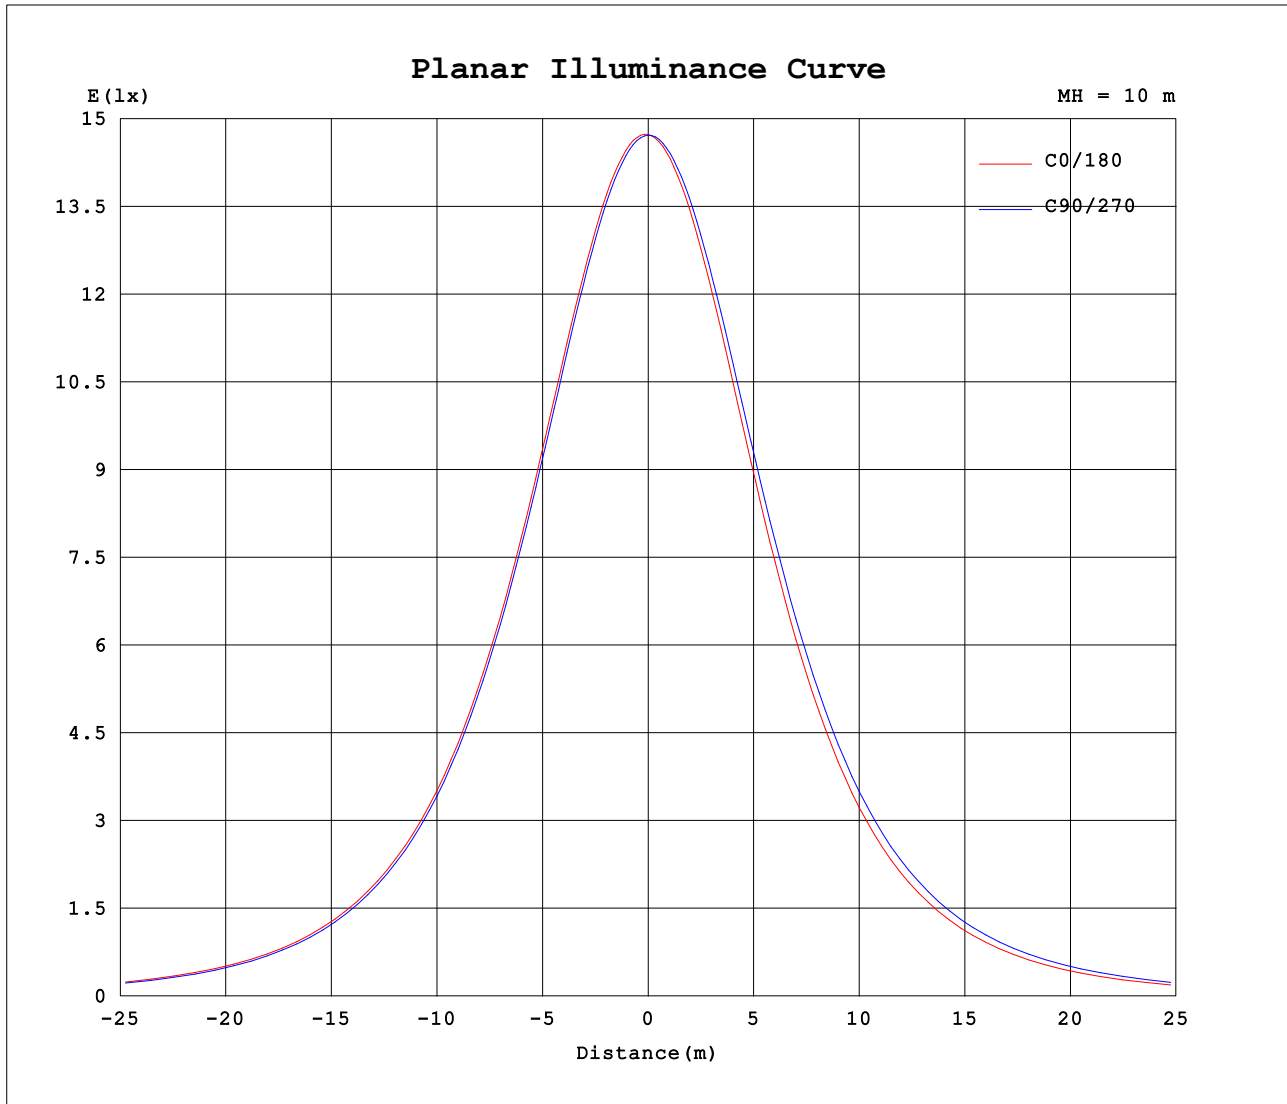

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.2400A P:28.90W PF:0.9970 Freq:50.00Hz Lamp Flux:4115.74x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0825*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1473	1473	1473	1473	1473	1473	1473	1473										
5	1472	1471	1466	1464	1459	1462	1468	1469										
10	1457	1454	1444	1440	1432	1437	1450	1451										
15	1426	1425	1411	1404	1391	1399	1419	1419										
20	1382	1382	1364	1356	1337	1349	1375	1374										
25	1327	1327	1306	1295	1272	1286	1320	1317										
30	1259	1260	1236	1224	1196	1213	1253	1249										
35	1180	1182	1157	1143	1111	1130	1176	1169										
40	1092	1095	1068	1051	1017	1037	1089	1079										
45	995	999	970	952	913	936	991	982										
50	890	894	864	845	804	828	886	876										
55	779	782	751	731	690	714	775	762										
60	661	663	631	611	570	593	656	644										
65	539	540	507	489	447	469	533	520										
70	415	414	381	364	324	344	406	394										
75	292	291	256	242	205	223	279	270										
80	176	173	141	129	99.0	116	162	155										
85	75.0	70.5	48.7	39.6	17.3	30.0	62.4	59.9										
90	4.95	3.22	0.20	0.19	0.17	0.18	0.24	0.56										
95	0.20	0.25	0.25	0.24	0.24	0.23	0.21	0.26										
100	0.27	0.31	0.30	0.32	0.31	0.30	0.29	0.33										
105	0.34	0.39	0.39	0.45	0.43	0.40	0.37	0.41										
110	0.43	0.47	0.50	0.52	0.56	0.49	0.48	0.48										
115	0.53	0.55	0.59	0.62	0.65	0.60	0.57	0.58										
120	0.63	0.63	0.69	0.72	0.85	0.71	0.66	0.66										
125	0.73	0.72	0.79	0.82	0.96	0.80	0.77	0.77										
130	0.84	0.81	0.88	0.92	1.06	0.91	0.85	0.81										
135	0.92	0.90	1.00	1.03	1.18	1.02	0.94	0.91										
140	1.07	1.00	1.09	1.11	1.29	1.11	1.03	0.99										
145	1.23	1.10	1.20	1.21	1.39	1.22	1.11	1.09										
150	1.33	1.20	1.29	1.30	1.49	1.30	1.28	1.18										
155	1.46	1.31	1.37	1.39	1.59	1.38	1.36	1.28										
160	1.52	1.38	1.45	1.47	1.71	1.47	1.43	1.36										
165	1.50	1.43	1.51	1.53	1.79	1.54	1.48	1.42										
170	1.55	1.47	1.55	1.59	1.83	1.69	1.52	1.46										
175	1.57	1.50	1.58	1.63	1.79	1.69	1.65	1.56										
180	1.72	1.62	1.62	1.67	1.73	1.61	1.62	1.67										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: