


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 141.10 lm/W			
MODEL		I _{max} (cd)	1150	S/MH(C0/180)	1.29
NOMINAL POWER(W)	24W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	3287.5	η UP,DN(C0-180)	0.1,50.9
NOMINAL FLUX(lm)	3287.54	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.0
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

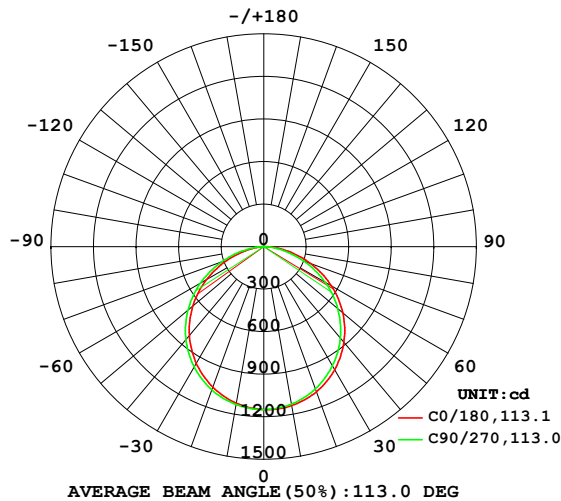

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

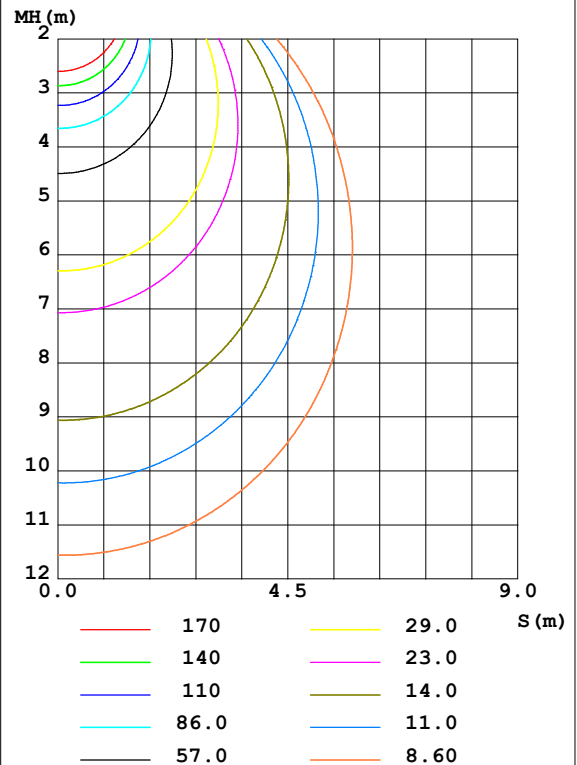

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1138	1134	1127	1127	1121	1123	1131	1133	0- 10	108.7	108.7	3.31,3.31
20	1088	1081	1067	1067	1054	1060	1074	1077	10- 20	311.9	420.6	12.8,12.8
30	1002	991.8	969.7	970.2	952.0	961.0	981.5	984.3	20- 30	473.9	894.5	27.2,27.2
40	880.1	868.4	840.4	840.4	817.0	828.2	854.5	857.9	30- 40	573.1	1468	44.6,44.6
50	728.1	714.9	682.2	681.5	654.2	667.5	698.6	702.0	40- 50	596.1	2064	62.8,62.8
60	550.5	534.7	499.1	497.4	468.7	481.9	518.2	520.2	50- 60	538.2	2602	79.1,79.1
70	352.9	336.8	300.5	298.8	267.4	281.1	318.1	320.2	60- 70	405.4	3007	91.5,91.5
80	157.6	142.0	112.2	108.1	82.64	95.27	123.2	127.5	70- 80	223.3	3231	98.3,98.3
90	10.28	3.256	0.1556	0.1575	0.1406	0.1477	0.1235	0.4416	80- 90	53.19	3284	99.9,99.9
100	0.2250	0.2204	0.2275	0.2592	0.2666	0.2493	0.2084	0.2155	90-100	0.3185	3284	99.9,99.9
110	0.3535	0.3392	0.3728	0.4070	0.4264	0.3778	0.3489	0.3582	100-110	0.3189	3284	99.9,99.9
120	0.5253	0.5038	0.5253	0.5741	0.5887	0.5157	0.4845	0.5085	110-120	0.4450	3285	99.9,99.9
130	0.6780	0.6492	0.6876	0.7292	0.7437	0.7360	0.6371	0.6756	120-130	0.5471	3285	99.9,99.9
140	0.8306	0.7872	0.8693	0.8938	0.8841	0.9346	0.7775	0.8571	130-140	0.5956	3286	100,100
150	0.9952	0.9422	1.027	1.042	1.020	1.150	0.9204	0.9153	140-150	0.5810	3287	100,100
160	1.121	1.095	1.184	1.206	1.180	1.337	1.066	1.063	150-160	0.4980	3287	100,100
170	1.175	1.177	1.264	1.288	1.271	1.480	1.477	1.172	160-170	0.3460	3287	100,100
180	1.223	1.221	1.228	1.238	1.238	1.225	1.230	1.240	170-180	0.1210	3288	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

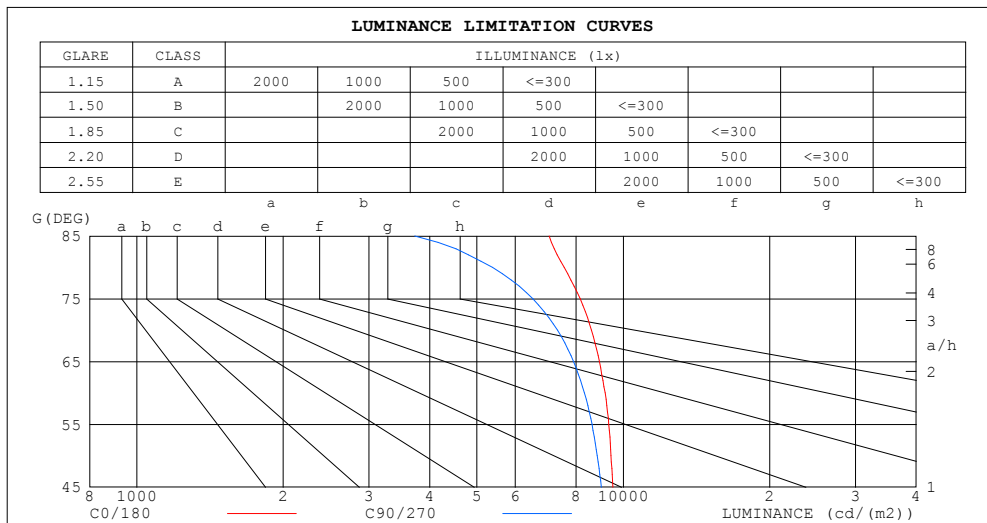

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7046	3725
80	7563	5385
75	8153	6519
70	8598	7323
65	8928	7899
60	9175	8318
55	9339	8621
50	9439	8844
45	9518	9009


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.74	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

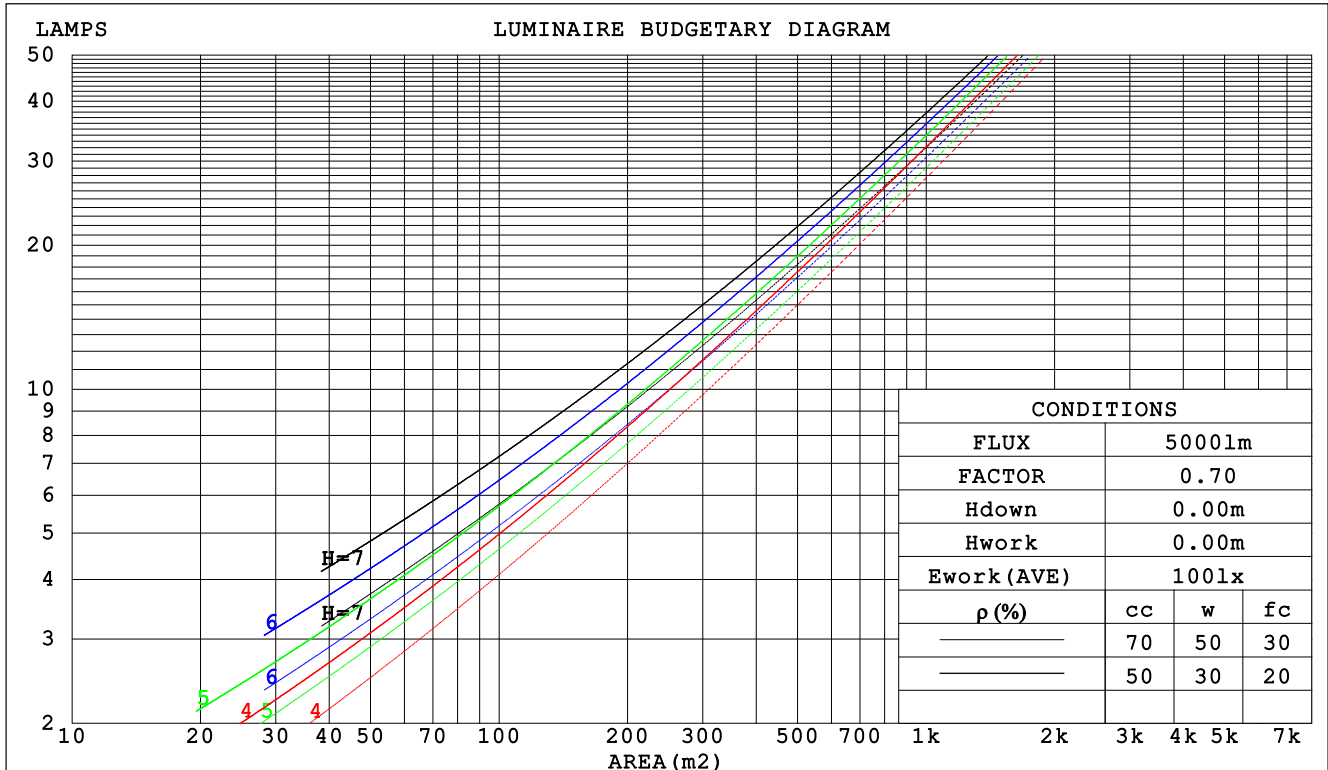

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm					
NAME: 净化灯			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.306	.174	.055	.299	.171	.054	.286	.164	.052	.274	.158	.051	.262	.152	.049		
2.0	.290	.159	.049	.284	.156	.048	.272	.151	.047	.261	.146	.046	.251	.142	.045		
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.234	.130	.040		
4.0	.248	.129	.038	.244	.127	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036		
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.102	.030	.189	.099	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.025	.182	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.142	.099	.065	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.059	.135	.088	.052	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.070	.030	.112	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.124	.065	.026	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.071	.037	.014	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm											
NAME: 净化灯						TYPE:3000K			WEIGHT:		
SPEC.:						DIM.: 2X2			SERIAL No.:		
MFR.: WS						SUR.:0.6*0.6			Shielding Angle:		
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		20.8	22.4	21.1	22.6	22.8	20.5	22.0	20.8	22.2	22.4
3H		22.4	23.8	22.7	24.1	24.3	21.9	23.3	22.2	23.6	23.8
4H		23.1	24.4	23.4	24.7	25.0	22.5	23.8	22.8	24.1	24.3
6H		23.6	24.9	23.9	25.1	25.4	22.8	24.1	23.1	24.3	24.6
8H		23.8	25.0	24.1	25.3	25.6	22.9	24.1	23.2	24.4	24.7
12H		23.9	25.0	24.2	25.3	25.7	22.9	24.1	23.3	24.4	24.7
4H 2H		21.4	22.8	21.8	23.0	23.3	21.2	22.5	21.5	22.8	23.0
3H		23.2	24.4	23.6	24.7	25.0	22.8	24.0	23.2	24.3	24.6
4H		24.0	25.1	24.4	25.4	25.7	23.5	24.5	23.8	24.9	25.2
6H		24.6	25.6	25.0	25.9	26.3	23.9	24.9	24.3	25.2	25.6
8H		24.9	25.7	25.3	26.1	26.5	24.0	24.9	24.5	25.3	25.7
12H		25.0	25.8	25.5	26.2	26.6	24.1	24.9	24.5	25.3	25.7
8H 4H		24.3	25.1	24.7	25.5	25.9	23.8	24.7	24.2	25.0	25.4
6H		25.0	25.8	25.5	26.2	26.6	24.4	25.1	24.8	25.5	26.0
8H		25.3	26.0	25.8	26.4	26.9	24.6	25.2	25.0	25.7	26.1
12H		25.6	26.2	26.1	26.6	27.1	24.7	25.3	25.2	25.7	26.2
12H 4H		24.3	25.1	24.7	25.5	25.9	23.8	24.6	24.2	25.0	25.4
6H		25.1	25.7	25.5	26.2	26.6	24.5	25.1	24.9	25.5	26.0
8H		25.4	26.0	25.9	26.4	26.9	24.7	25.3	25.2	25.7	26.2
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 3288 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	77	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

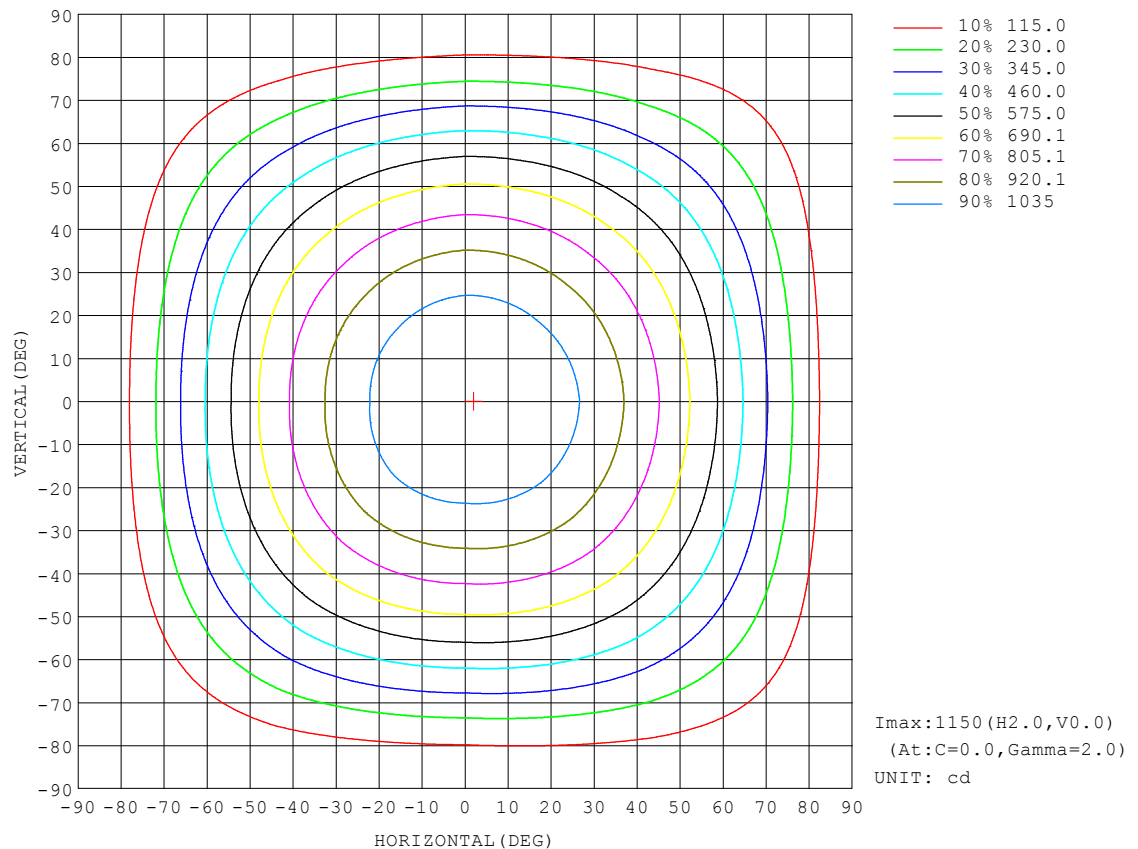


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

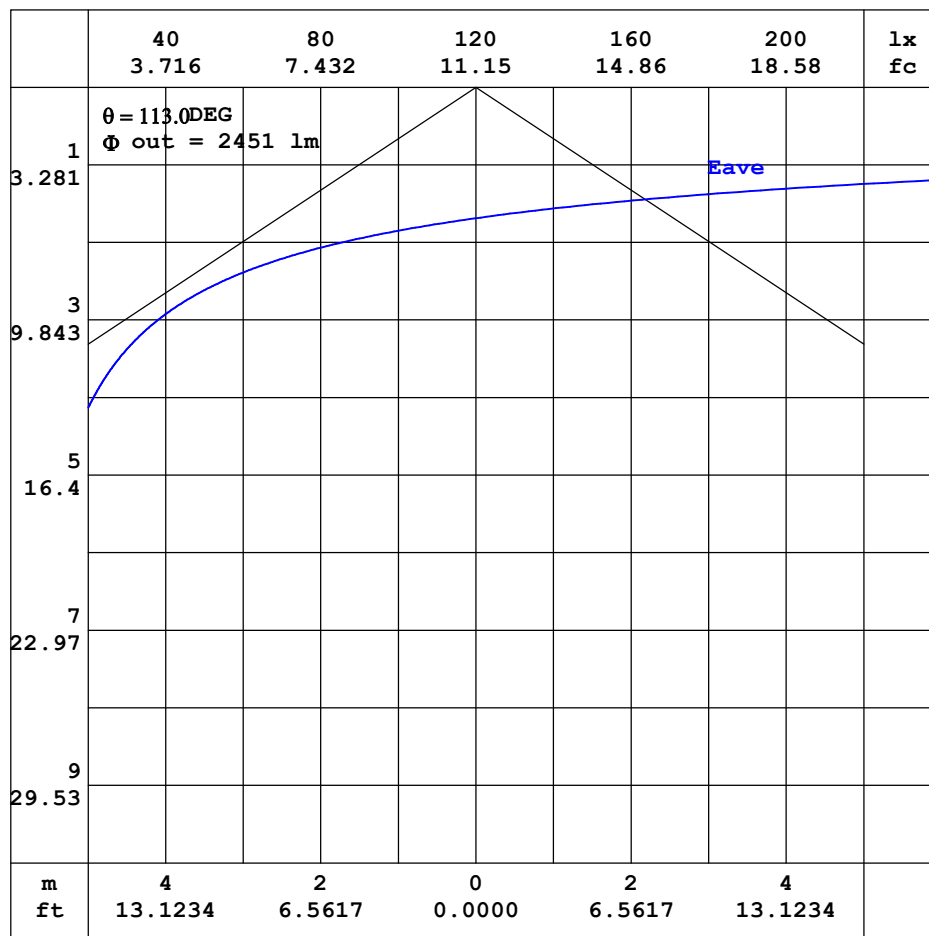


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

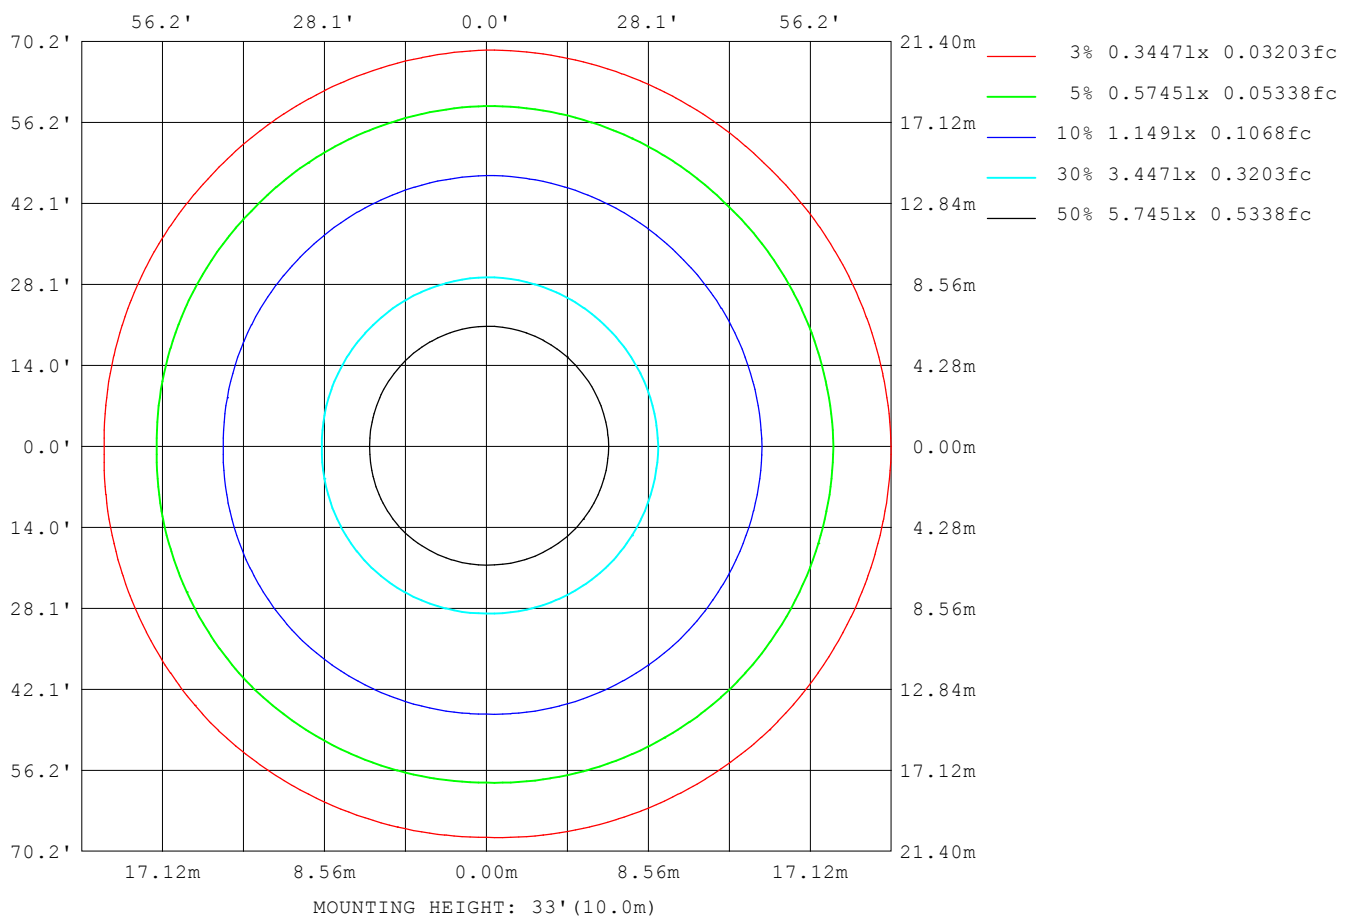

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8096
L_0~180 (75) av	6819
L_0~180 (85) av	4312
L_90~270 (65) av	8084
L_90~270 (75) av	6766
L_90~270 (85) av	4086
L_45 (65) av	8081
L_45 (75) av	6773
L_45 (85) av	4145

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

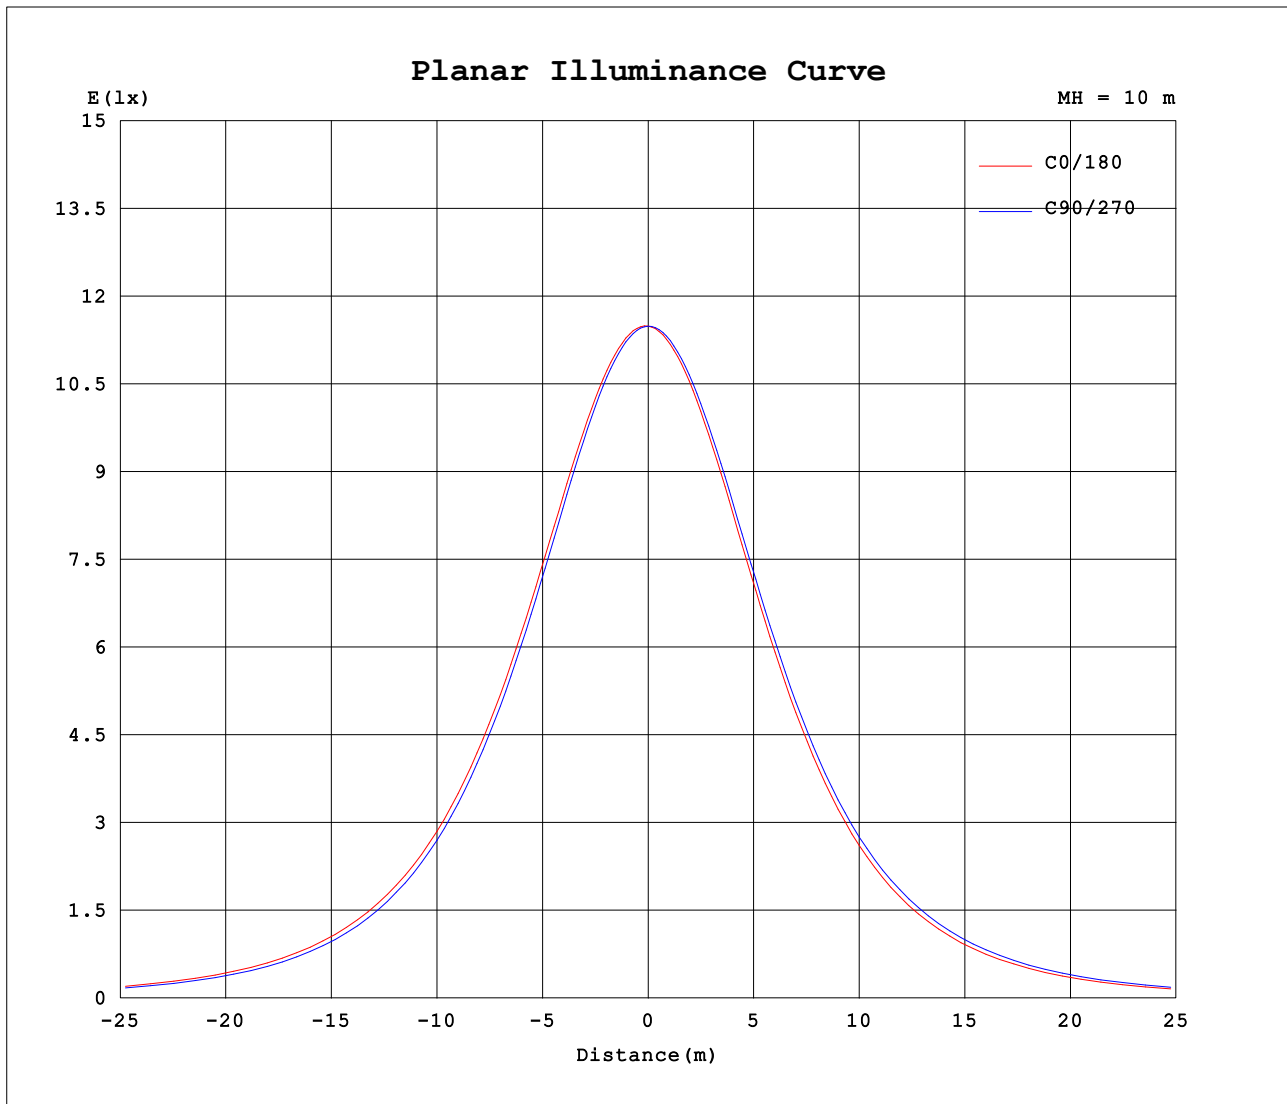

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.1930A P:23.30W PF:0.9980 Freq:60.00Hz Lamp Flux:3287.54x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1149	1148	1149	1149	1149	1148	1149	1149										
5	1149	1146	1143	1143	1140	1141	1145	1146										
10	1138	1134	1127	1127	1121	1123	1131	1133										
15	1118	1113	1102	1102	1092	1096	1107	1109										
20	1088	1081	1067	1067	1054	1060	1074	1077										
25	1050	1041	1022	1023	1007	1015	1032	1035										
30	1002	992	970	970	952	961	982	984										
35	944	934	909	909	888	899	922	925										
40	880	868	840	840	817	828	854	858										
45	808	795	764	764	739	751	780	784										
50	728	715	682	681	654	667	699	702										
55	643	628	593	592	564	577	611	614										
60	550	535	499	497	469	482	518	520										
65	453	437	401	399	368	382	419	421										
70	353	337	301	299	267	281	318	320										
75	253	237	202	200	170	184	218	221										
80	158	142	112	108	82.6	95.3	123	128										
85	73.7	60.6	39.0	35.3	16.5	26.6	46.5	50.9										
90	10.3	3.26	0.16	0.16	0.14	0.15	0.12	0.44										
95	0.16	0.17	0.18	0.20	0.20	0.18	0.16	0.16										
100	0.23	0.22	0.23	0.26	0.27	0.25	0.21	0.22										
105	0.28	0.28	0.30	0.33	0.34	0.31	0.28	0.28										
110	0.35	0.34	0.37	0.41	0.43	0.38	0.35	0.36										
115	0.44	0.42	0.45	0.49	0.50	0.44	0.41	0.43										
120	0.53	0.50	0.53	0.57	0.59	0.52	0.48	0.51										
125	0.61	0.57	0.60	0.66	0.67	0.65	0.56	0.57										
130	0.68	0.65	0.69	0.73	0.74	0.74	0.64	0.68										
135	0.77	0.72	0.78	0.81	0.81	0.83	0.70	0.76										
140	0.83	0.79	0.87	0.89	0.88	0.93	0.78	0.86										
145	0.92	0.86	0.95	0.96	0.95	1.05	0.84	0.88										
150	1.00	0.94	1.03	1.04	1.02	1.15	0.92	0.92										
155	1.08	1.02	1.11	1.13	1.10	1.23	0.99	0.99										
160	1.12	1.09	1.18	1.21	1.18	1.34	1.07	1.06										
165	1.14	1.15	1.24	1.26	1.25	1.46	1.14	1.13										
170	1.17	1.18	1.26	1.29	1.27	1.48	1.48	1.17										
175	1.19	1.20	1.25	1.27	1.25	1.28	1.33	1.22										
180	1.22	1.22	1.23	1.24	1.24	1.23	1.23	1.24										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: