


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 147.65 lm/W			
MODEL		I _{max} (cd)	1177	S/MH(C0/180)	1.30
NOMINAL POWER(W)	24W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	3366.3	η UP,DN(C0-180)	0.1,51.1
NOMINAL FLUX(lm)	3366.32	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,48.8
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

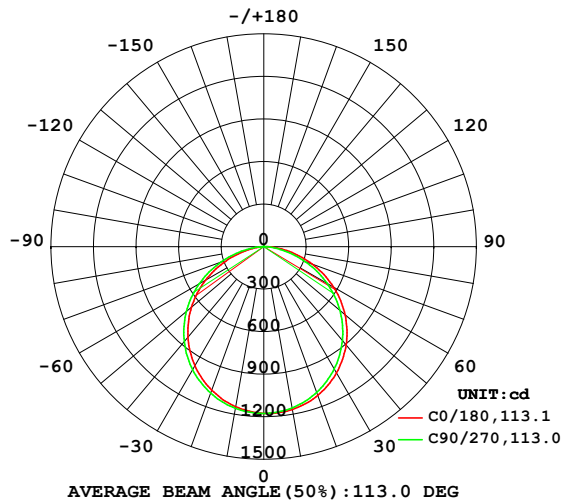

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

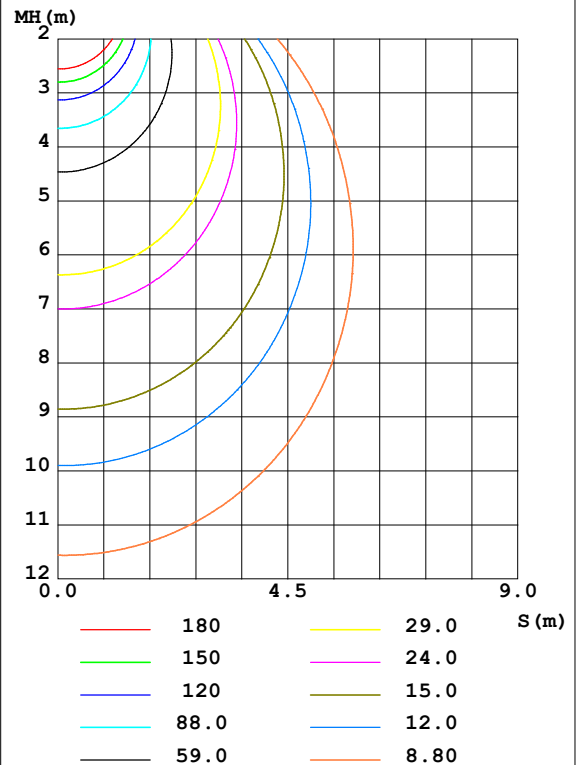

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1166	1162	1155	1154	1146	1149	1157	1160	0- 10	111.3	111.3	3.31,3.31
20	1116	1109	1094	1092	1077	1083	1099	1103	10- 20	319.3	430.6	12.8,12.8
30	1027	1018	994.4	993.4	971.1	980.9	1003	1008	20- 30	485.1	915.7	27.2,27.2
40	904.7	892.2	863.3	860.4	833.1	844.4	872.5	878.5	30- 40	586.7	1502	44.6,44.6
50	748.8	735.6	701.6	697.5	665.7	679.2	712.6	719.1	40- 50	610.4	2113	62.8,62.8
60	567.7	552.1	514.1	509.3	475.4	488.8	527.6	533.0	50- 60	551.0	2664	79.1,79.1
70	365.7	349.5	311.7	305.2	269.4	282.8	322.4	328.2	60- 70	415.1	3079	91.5,91.5
80	165.5	149.4	117.5	110.9	81.30	93.75	123.1	130.6	70- 80	228.6	3308	98.3,98.3
90	12.91	4.854	0.1630	0.1574	0.1429	0.1453	0.1284	0.4495	80- 90	54.81	3362	99.9,99.9
100	0.2179	0.2229	0.2372	0.2641	0.2762	0.2542	0.2157	0.2203	90-100	0.3769	3363	99.9,99.9
110	0.3750	0.3513	0.3826	0.4167	0.4264	0.3851	0.3610	0.3631	100-110	0.3268	3363	99.9,99.9
120	0.5278	0.5111	0.5495	0.5838	0.6032	0.5327	0.5063	0.5181	110-120	0.4560	3364	99.9,99.9
130	0.6972	0.6613	0.7118	0.7534	0.7534	0.7627	0.6564	0.6804	120-130	0.5617	3364	99.9,99.9
140	0.8572	0.8187	0.8935	0.9059	0.8987	0.9563	0.7993	0.8813	130-140	0.6113	3365	100,100
150	1.029	0.9761	1.056	1.063	1.056	1.160	0.9422	0.9323	140-150	0.5956	3365	100,100
160	1.159	1.131	1.216	1.228	1.214	1.363	1.104	1.092	150-160	0.5112	3366	100,100
170	1.207	1.221	1.310	1.322	1.301	1.475	1.489	1.211	160-170	0.3548	3366	100,100
180	1.254	1.254	1.257	1.269	1.252	1.250	1.252	1.264	170-180	0.1236	3366	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

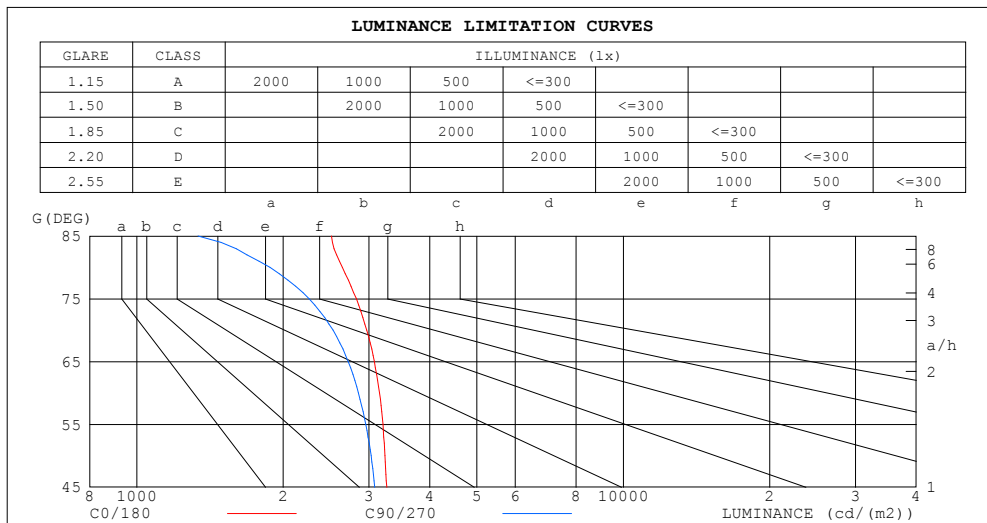

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2513	1336
80	2647	1879
75	2827	2261
70	2970	2531
65	3078	2721
60	3154	2856
55	3205	2956
50	3236	3032
45	3264	3084


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.74	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

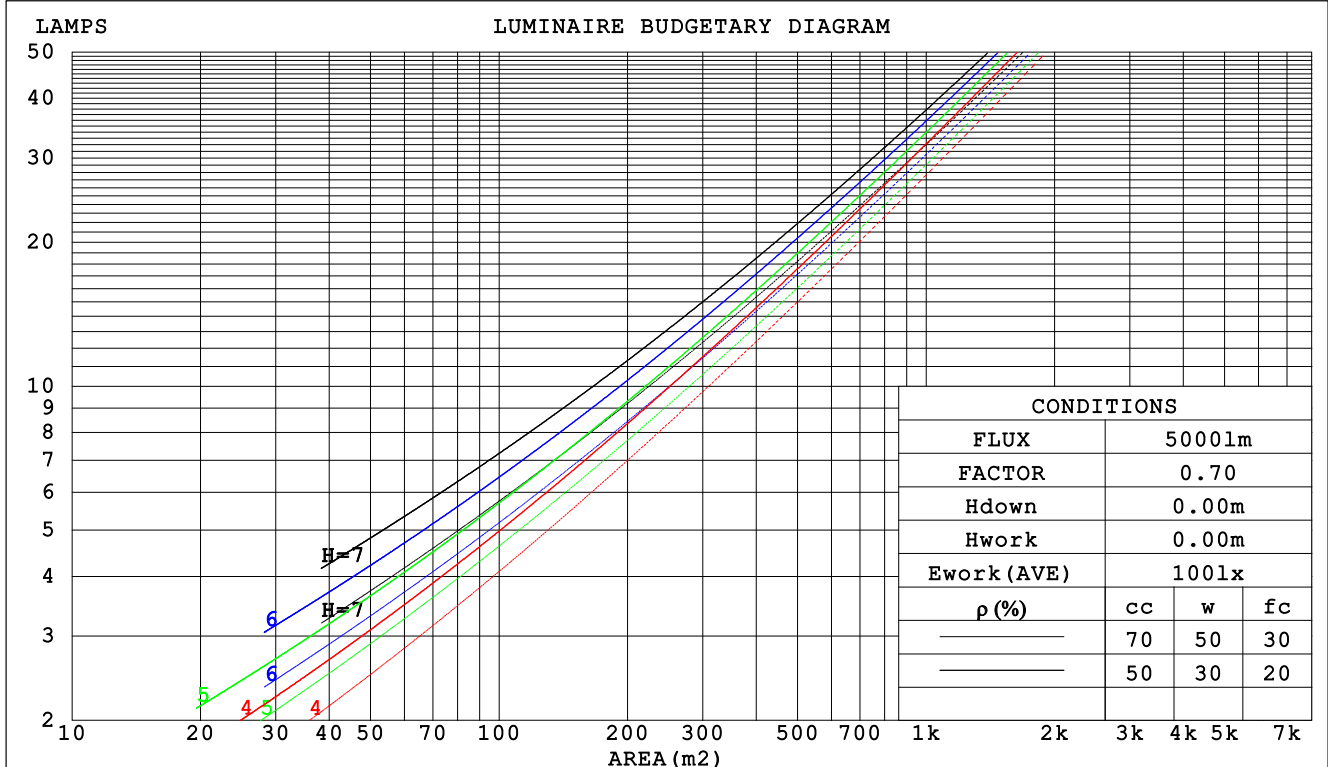

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm								
NAME: 净化灯				TYPE:3500K			WEIGHT:	
SPEC.:				DIM.: 2X2			SERIAL No.:	
MFR.: WS				SUR.:0.6*0.6			Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.306	.174	.055	.299	.171	.054	.286	.164	.052	.274	.158	.051	.262	.152	.049		
2.0	.290	.159	.049	.284	.156	.048	.272	.151	.047	.261	.146	.046	.251	.142	.045		
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.234	.130	.040		
4.0	.248	.129	.038	.244	.127	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036		
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.102	.030	.189	.099	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.025	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.142	.099	.065	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.059	.135	.088	.052	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.070	.030	.112	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.124	.065	.026	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.071	.037	.014	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm											
NAME: 净化灯					TYPE:3500K			WEIGHT:			
SPEC.:					DIM.: 2X2			SERIAL No.:			
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	17.1	18.7	17.4	18.9	19.1	16.8	18.3	17.1	18.5	18.7
	3H	18.8	20.2	19.1	20.4	20.6	18.3	19.7	18.6	19.9	20.1
	4H	19.4	20.8	19.8	21.0	21.3	18.8	20.1	19.1	20.4	20.7
	6H	19.9	21.2	20.3	21.5	21.8	19.1	20.4	19.5	20.7	21.0
	8H	20.1	21.3	20.5	21.6	21.9	19.2	20.4	19.6	20.7	21.0
	12H	20.2	21.4	20.6	21.7	22.0	19.3	20.4	19.6	20.7	21.0
4H	2H	17.7	19.1	18.1	19.3	19.6	17.5	18.8	17.8	19.1	19.3
	3H	19.6	20.7	19.9	21.0	21.3	19.1	20.3	19.5	20.6	20.9
	4H	20.4	21.4	20.7	21.7	22.1	19.8	20.9	20.2	21.2	21.5
	6H	21.0	21.9	21.4	22.3	22.7	20.3	21.2	20.7	21.6	21.9
	8H	21.2	22.1	21.6	22.5	22.9	20.4	21.3	20.8	21.7	22.0
	12H	21.4	22.2	21.8	22.6	23.0	20.5	21.3	20.9	21.7	22.1
8H	4H	20.6	21.5	21.0	21.9	22.2	20.1	21.0	20.5	21.4	21.8
	6H	21.4	22.1	21.8	22.5	23.0	20.7	21.5	21.2	21.9	22.3
	8H	21.7	22.4	22.2	22.8	23.3	21.0	21.6	21.4	22.0	22.5
	12H	22.0	22.5	22.5	23.0	23.5	21.1	21.6	21.6	22.1	22.6
12H	4H	20.6	21.4	21.0	21.8	22.2	20.1	21.0	20.6	21.3	21.8
	6H	21.5	22.1	21.9	22.5	23.0	20.8	21.5	21.3	21.9	22.3
	8H	21.8	22.4	22.3	22.8	23.3	21.1	21.6	21.5	22.1	22.6
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117 Corrected 3366 lm Total Lamp Luminous Flux. (8log(F/F0) = 4.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	77	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

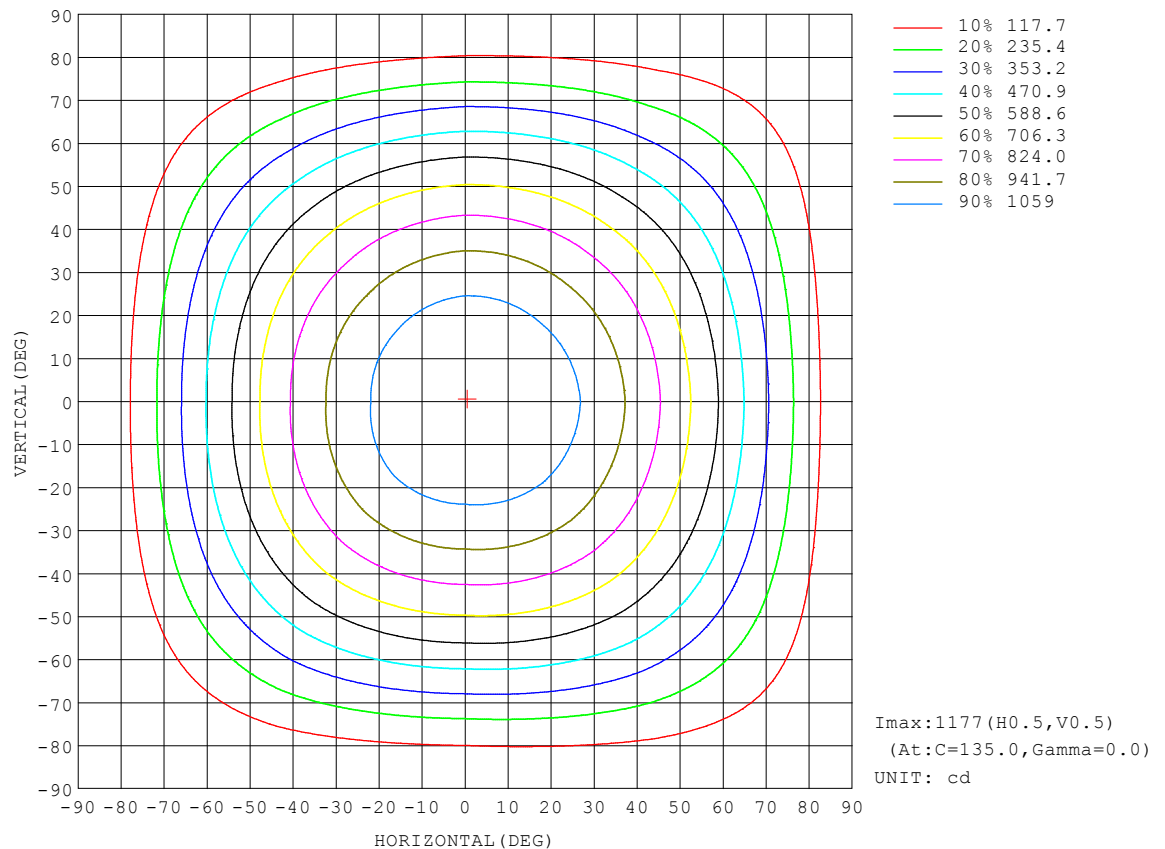


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

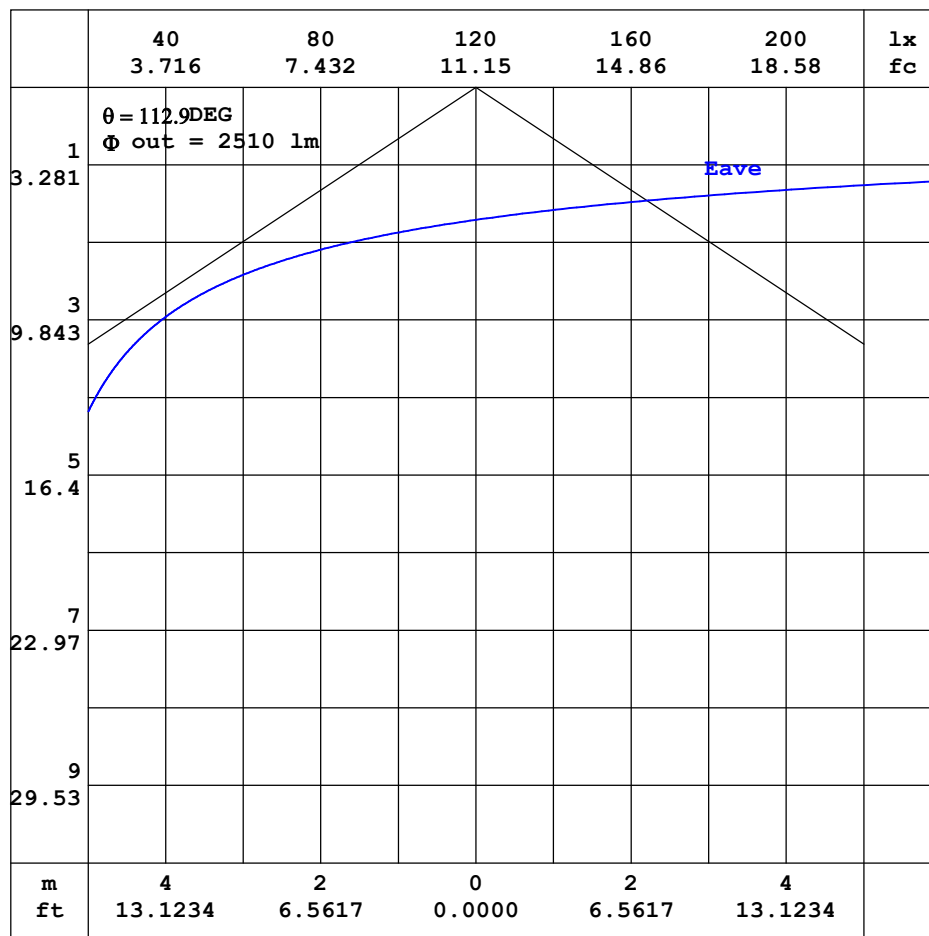


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

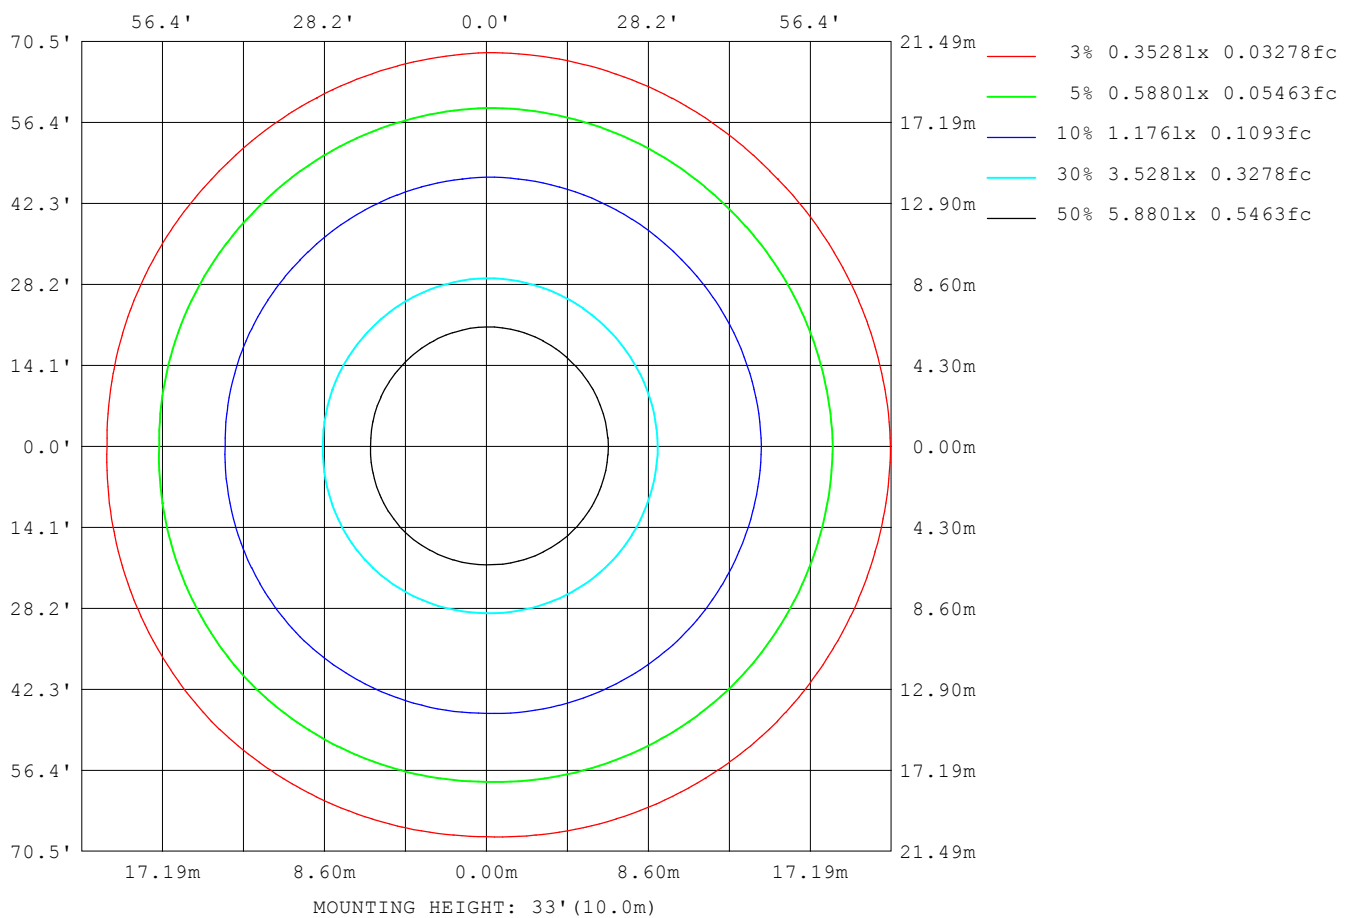

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2764
L_0~180 (75) av	2327
L_0~180 (85) av	1492
L_90~270 (65) av	2761
L_90~270 (75) av	2310
L_90~270 (85) av	1392
L_45 (65) av	2758
L_45 (75) av	2313
L_45 (85) av	1423

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

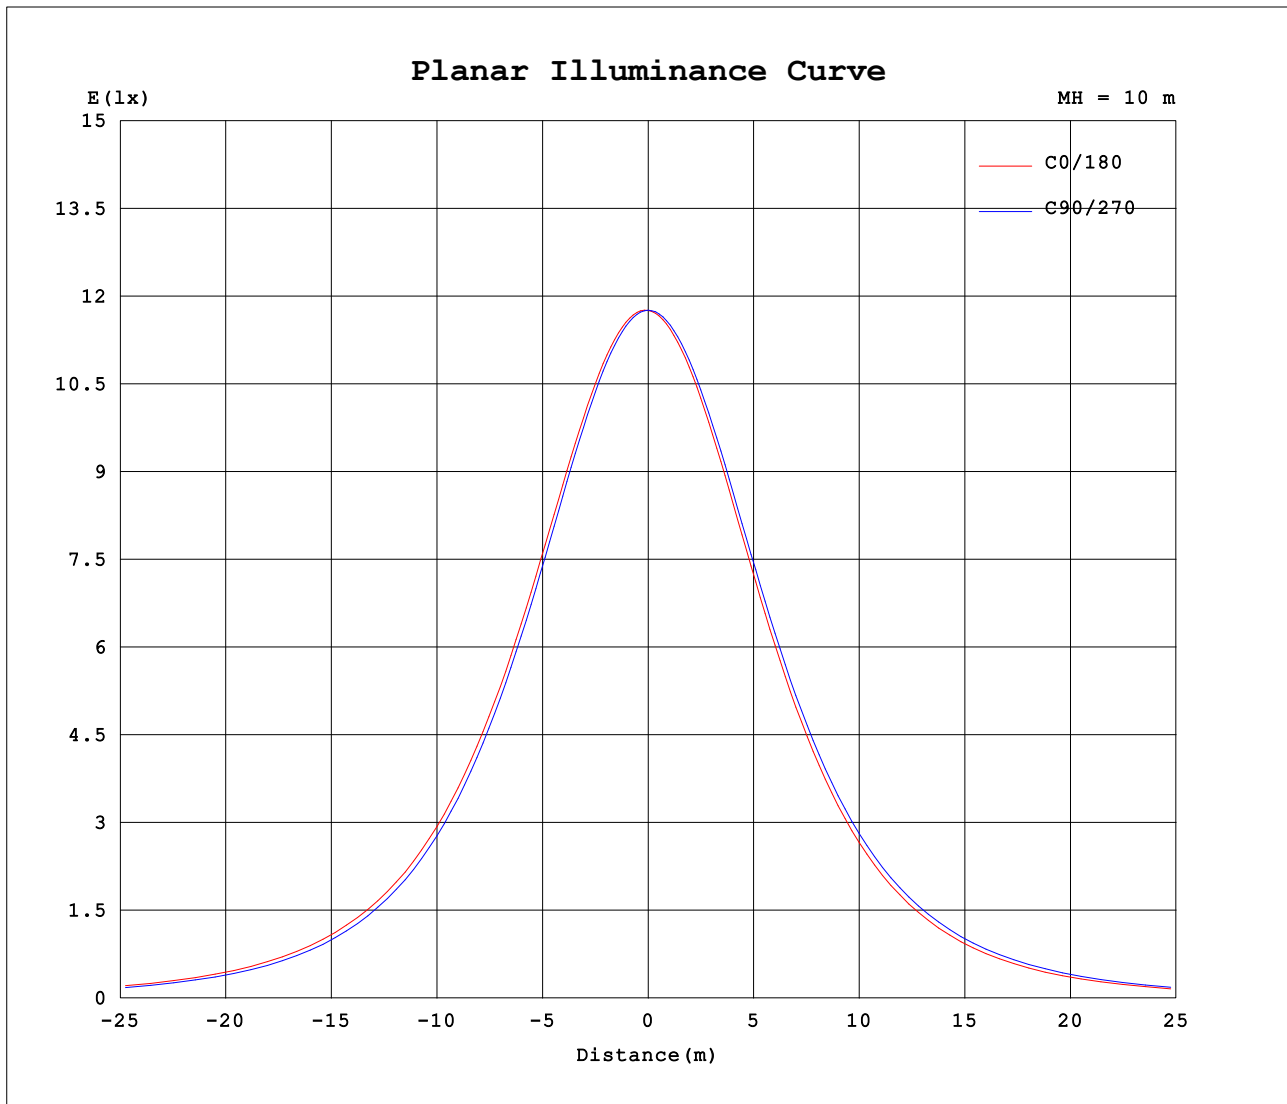

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.1890A P:22.80W PF:0.9960 Freq:60.00Hz Lamp Flux:3366.32x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1176	1176	1176	1177	1176	1176	1176	1177										
5	1176	1174	1170	1171	1166	1167	1172	1174										
10	1166	1162	1155	1154	1146	1149	1157	1160										
15	1146	1140	1129	1128	1116	1121	1133	1136										
20	1116	1109	1094	1092	1077	1083	1099	1103										
25	1076	1068	1049	1047	1028	1037	1055	1060										
30	1027	1018	994	993	971	981	1003	1008										
35	969	959	933	931	906	917	942	948										
40	905	892	863	860	833	844	873	878										
45	831	818	785	783	752	766	796	803										
50	749	736	702	697	666	679	713	719										
55	662	647	610	607	573	587	623	629										
60	568	552	514	509	475	489	528	533										
65	468	452	414	408	373	386	426	432										
70	366	350	312	305	269	283	322	328										
75	263	247	211	205	170	184	220	226										
80	165	149	117	111	81.3	93.7	123	131										
85	78.9	65.4	41.9	36.6	14.8	24.5	45.4	52.2										
90	12.9	4.85	0.16	0.16	0.14	0.15	0.13	0.45										
95	0.17	0.18	0.19	0.20	0.21	0.19	0.16	0.16										
100	0.22	0.22	0.24	0.26	0.28	0.25	0.22	0.22										
105	0.29	0.28	0.31	0.34	0.35	0.34	0.29	0.30										
110	0.38	0.35	0.38	0.42	0.43	0.39	0.36	0.36										
115	0.45	0.43	0.46	0.50	0.51	0.46	0.43	0.44										
120	0.53	0.51	0.55	0.58	0.60	0.53	0.51	0.52										
125	0.63	0.60	0.62	0.67	0.68	0.67	0.58	0.60										
130	0.70	0.66	0.71	0.75	0.75	0.76	0.66	0.68										
135	0.78	0.74	0.80	0.83	0.84	0.84	0.73	0.77										
140	0.86	0.82	0.89	0.91	0.90	0.96	0.80	0.88										
145	0.93	0.89	0.98	0.98	0.98	1.07	0.86	0.90										
150	1.03	0.98	1.06	1.06	1.06	1.16	0.94	0.93										
155	1.12	1.05	1.15	1.15	1.14	1.24	1.02	1.01										
160	1.16	1.13	1.22	1.23	1.21	1.36	1.10	1.09										
165	1.18	1.19	1.28	1.29	1.28	1.47	1.17	1.15										
170	1.21	1.22	1.31	1.32	1.30	1.48	1.49	1.21										
175	1.21	1.24	1.30	1.31	1.28	1.30	1.34	1.24										
180	1.25	1.25	1.26	1.27	1.25	1.25	1.25	1.26										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: