


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 147.08 lm/W			
MODEL		Imax(cd)	1477	S/MH(C0/180)	1.30
NOMINAL POWER(W)	30W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4221.3	η UP,DN(C0-180)	0.1,50.3
NOMINAL FLUX(lm)	4221.29	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.5
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

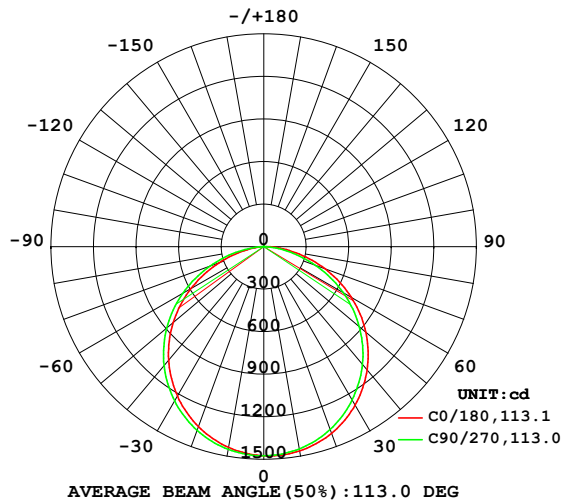

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

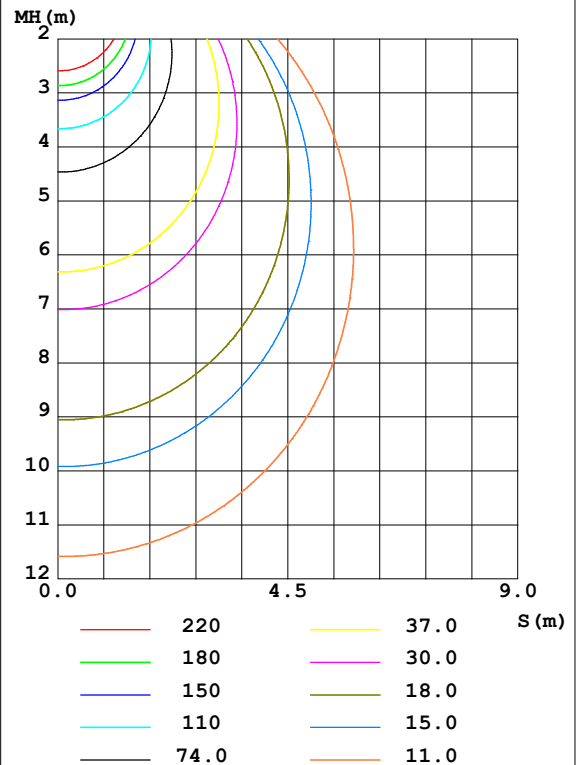

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1462	1458	1448	1433	1437	1441	1451	1461	0- 10	139.5	139.5	3.3,3.3
20	1400	1392	1371	1345	1351	1358	1378	1400	10- 20	400.1	539.6	12.8,12.8
30	1290	1278	1247	1212	1218	1230	1258	1291	20- 30	608.0	1148	27.2,27.2
40	1134	1120	1083	1037	1044	1058	1094	1137	30- 40	735.3	1883	44.6,44.6
50	940.7	923.6	878.7	825.6	834.3	850.8	893.4	945.3	40- 50	764.9	2648	62.7,62.7
60	712.4	694.4	645.1	584.1	595.5	611.5	661.4	718.1	50- 60	690.5	3338	79.1,79.1
70	461.2	440.9	389.3	327.8	336.9	353.4	404.6	464.8	60- 70	520.3	3859	91.4,91.4
80	208.1	190.5	147.5	96.38	101.5	116.4	157.9	211.4	70- 80	287.0	4146	98.2,98.2
90	16.51	6.638	0.2061	0.2205	0.1794	0.1864	0.1550	18.85	80- 90	70.54	4216	99.9,99.9
100	0.2735	0.2762	0.2953	0.3683	0.3440	0.3244	0.2762	0.2469	90-100	0.7113	4217	99.9,99.9
110	0.4671	0.4505	0.4745	0.5668	0.5402	0.4771	0.4603	0.4091	100-110	0.4108	4217	99.9,99.9
120	0.6802	0.6468	0.6827	0.7799	0.7534	0.6707	0.6251	0.5980	110-120	0.5730	4218	99.9,99.9
130	0.8813	0.8357	0.8934	0.9810	0.9520	0.9396	0.8237	0.8039	120-130	0.7046	4219	99.9,99.9
140	1.082	1.017	1.114	1.168	1.129	1.196	0.9980	1.044	130-140	0.7662	4219	100,100
150	1.293	1.221	1.325	1.361	1.318	1.467	1.180	1.133	140-150	0.7470	4220	100,100
160	1.451	1.424	1.504	1.560	1.531	1.722	1.390	1.349	150-160	0.6407	4221	100,100
170	1.530	1.538	1.625	1.661	1.635	1.870	1.872	1.485	160-170	0.4449	4221	100,100
180	1.574	1.574	1.548	1.574	1.574	1.577	1.574	1.577	170-180	0.1546	4221	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

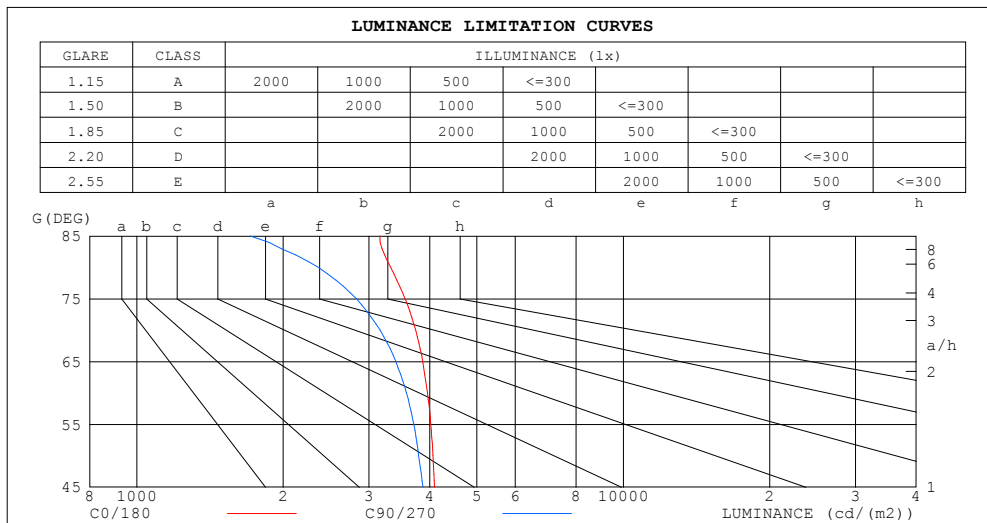


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.88	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

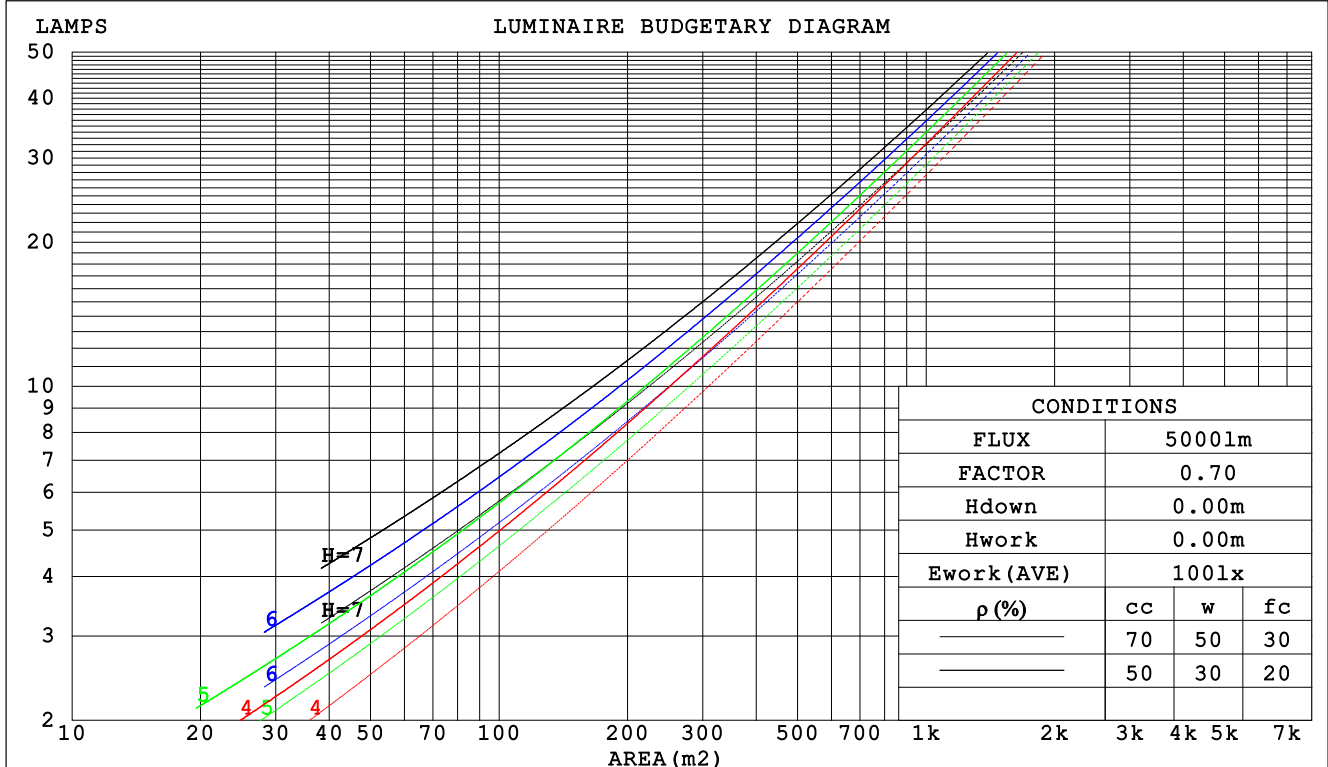

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm					
NAME: 净化灯			TYPE:3500K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.307	.175	.055	.300	.171	.054	.286	.164	.052	.274	.158	.051	.263	.152	.049		
2.0	.290	.159	.049	.284	.156	.048	.272	.151	.047	.261	.147	.046	.251	.142	.045		
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036		
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.213	.107	.031	.210	.106	.030	.202	.104	.030	.195	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.025	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.142	.099	.065	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.059	.135	.088	.052	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.092	.048	.129	.079	.042	.089	.055	.030	.051	.032	.018	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.070	.030	.112	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.026	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.071	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm											
NAME: 净化灯					TYPE:3500K			WEIGHT:			
SPEC.:					DIM.: 2X2			SERIAL No.:			
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	17.9	19.5	18.2	19.7	19.9	17.6	19.1	17.9	19.3	19.5
	3H	19.6	21.0	19.9	21.2	21.5	19.0	20.4	19.3	20.7	20.9
	4H	20.2	21.6	20.6	21.8	22.1	19.6	20.9	19.9	21.2	21.4
	6H	20.8	22.0	21.1	22.3	22.6	19.9	21.2	20.3	21.5	21.7
	8H	20.9	22.1	21.3	22.4	22.7	20.0	21.2	20.4	21.5	21.8
	12H	21.1	22.2	21.4	22.5	22.8	20.1	21.2	20.4	21.5	21.8
4H	2H	18.5	19.9	18.9	20.1	20.4	18.3	19.6	18.6	19.9	20.1
	3H	20.4	21.5	20.7	21.8	22.1	19.9	21.1	20.3	21.4	21.7
	4H	21.2	22.2	21.5	22.6	22.9	20.6	21.7	21.0	22.0	22.3
	6H	21.8	22.8	22.2	23.1	23.5	21.1	22.0	21.5	22.4	22.7
	8H	22.0	22.9	22.5	23.3	23.7	21.2	22.1	21.6	22.4	22.8
	12H	22.2	23.0	22.6	23.4	23.8	21.3	22.1	21.7	22.5	22.9
8H	4H	21.4	22.3	21.8	22.7	23.1	20.9	21.8	21.3	22.2	22.6
	6H	22.2	23.0	22.7	23.4	23.8	21.5	22.3	22.0	22.7	23.1
	8H	22.5	23.2	23.0	23.6	24.1	21.8	22.4	22.2	22.8	23.3
	12H	22.8	23.4	23.3	23.8	24.3	21.9	22.5	22.4	22.9	23.4
12H	4H	21.4	22.2	21.9	22.6	23.0	20.9	21.8	21.4	22.1	22.6
	6H	22.3	22.9	22.7	23.3	23.8	21.6	22.3	22.1	22.7	23.2
	8H	22.6	23.2	23.1	23.6	24.1	21.9	22.4	22.4	22.9	23.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117 Corrected 4221 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	55	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

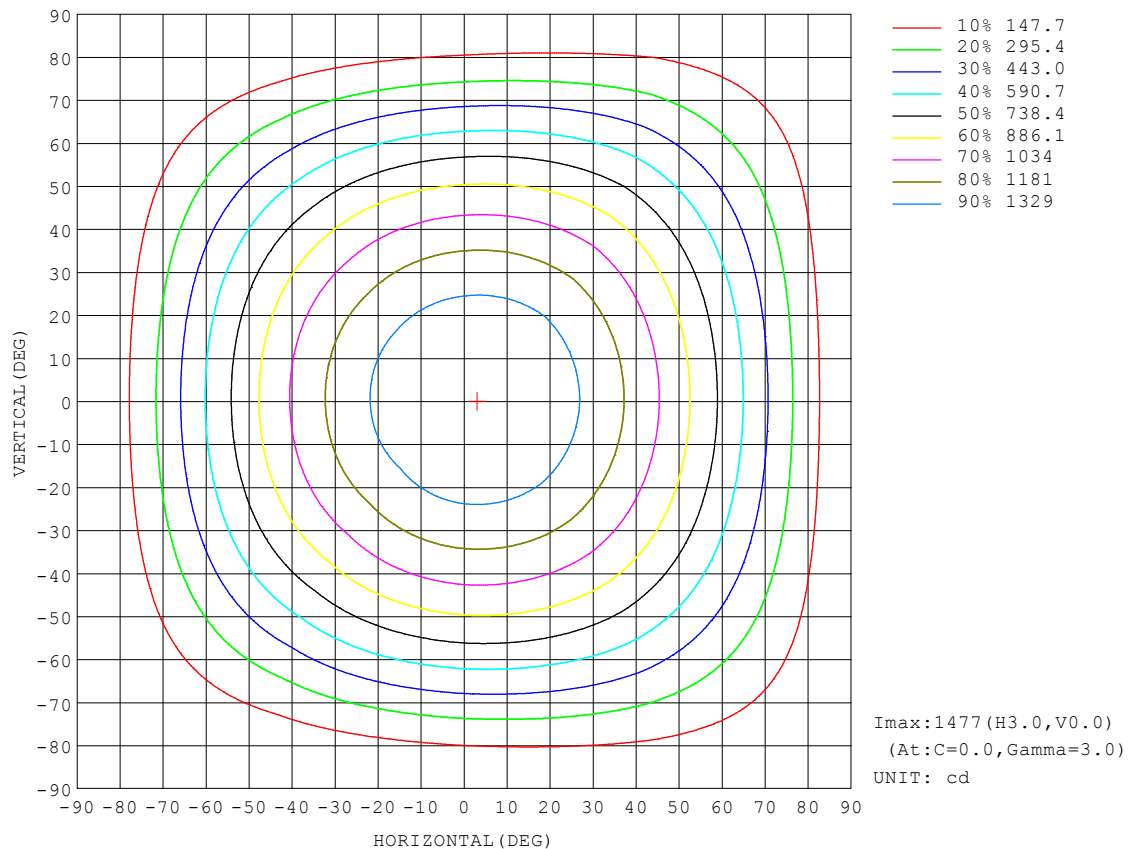


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

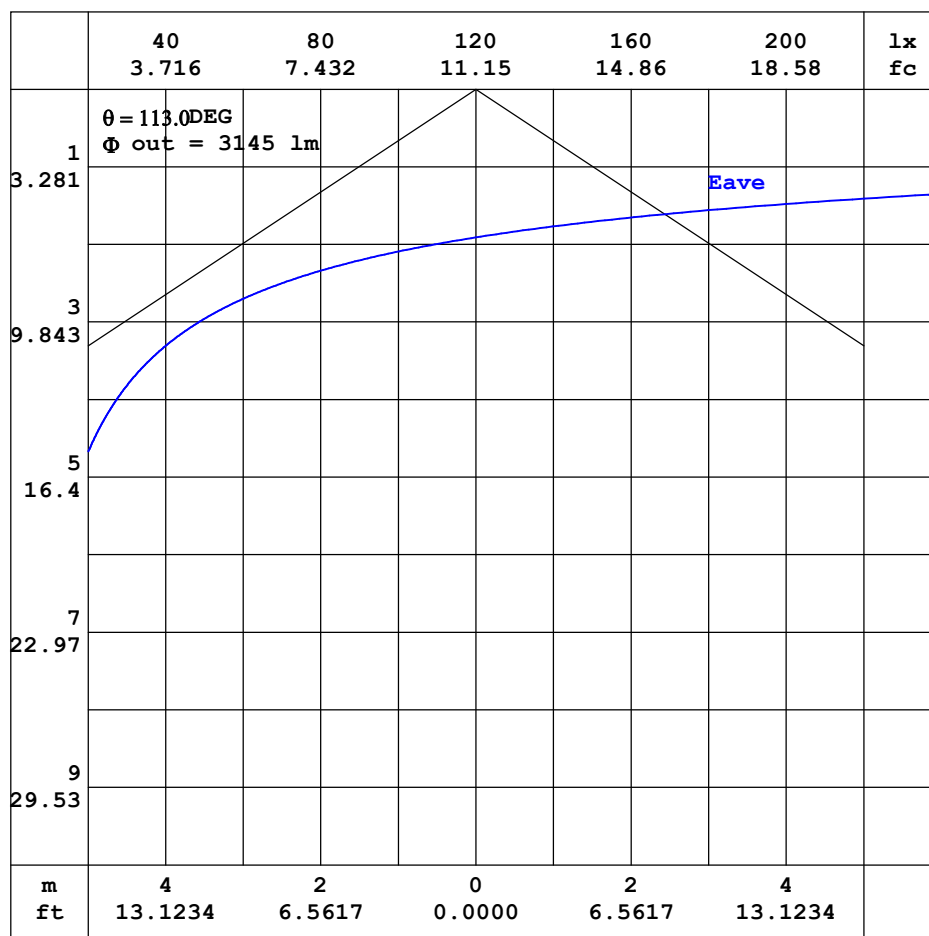


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

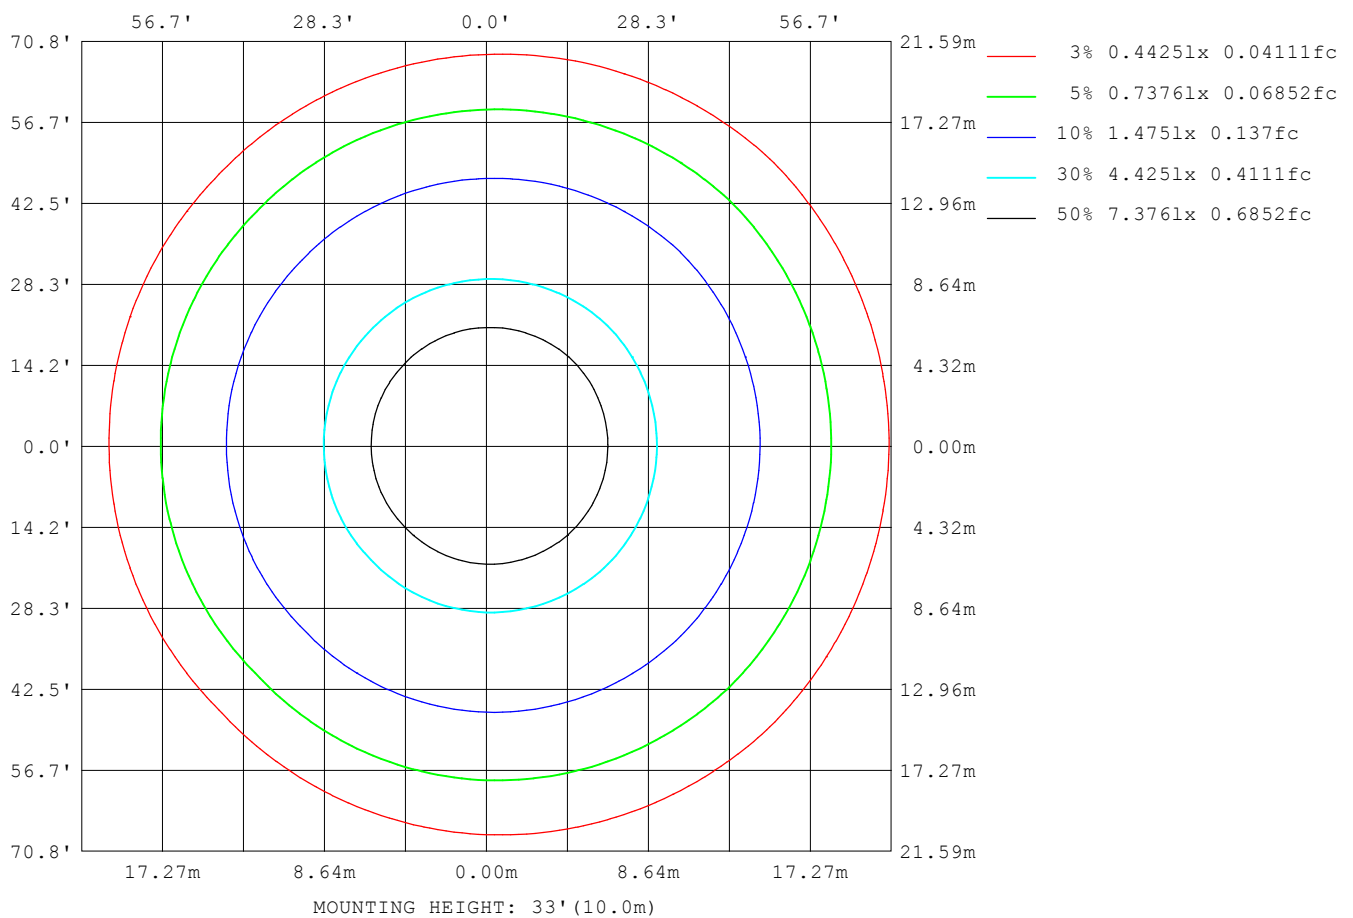

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3468
L_0~180 (75) av	2921
L_0~180 (85) av	1864
L_90~270 (65) av	3461
L_90~270 (75) av	2894
L_90~270 (85) av	1763
L_45 (65) av	3456
L_45 (75) av	2905
L_45 (85) av	1833

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

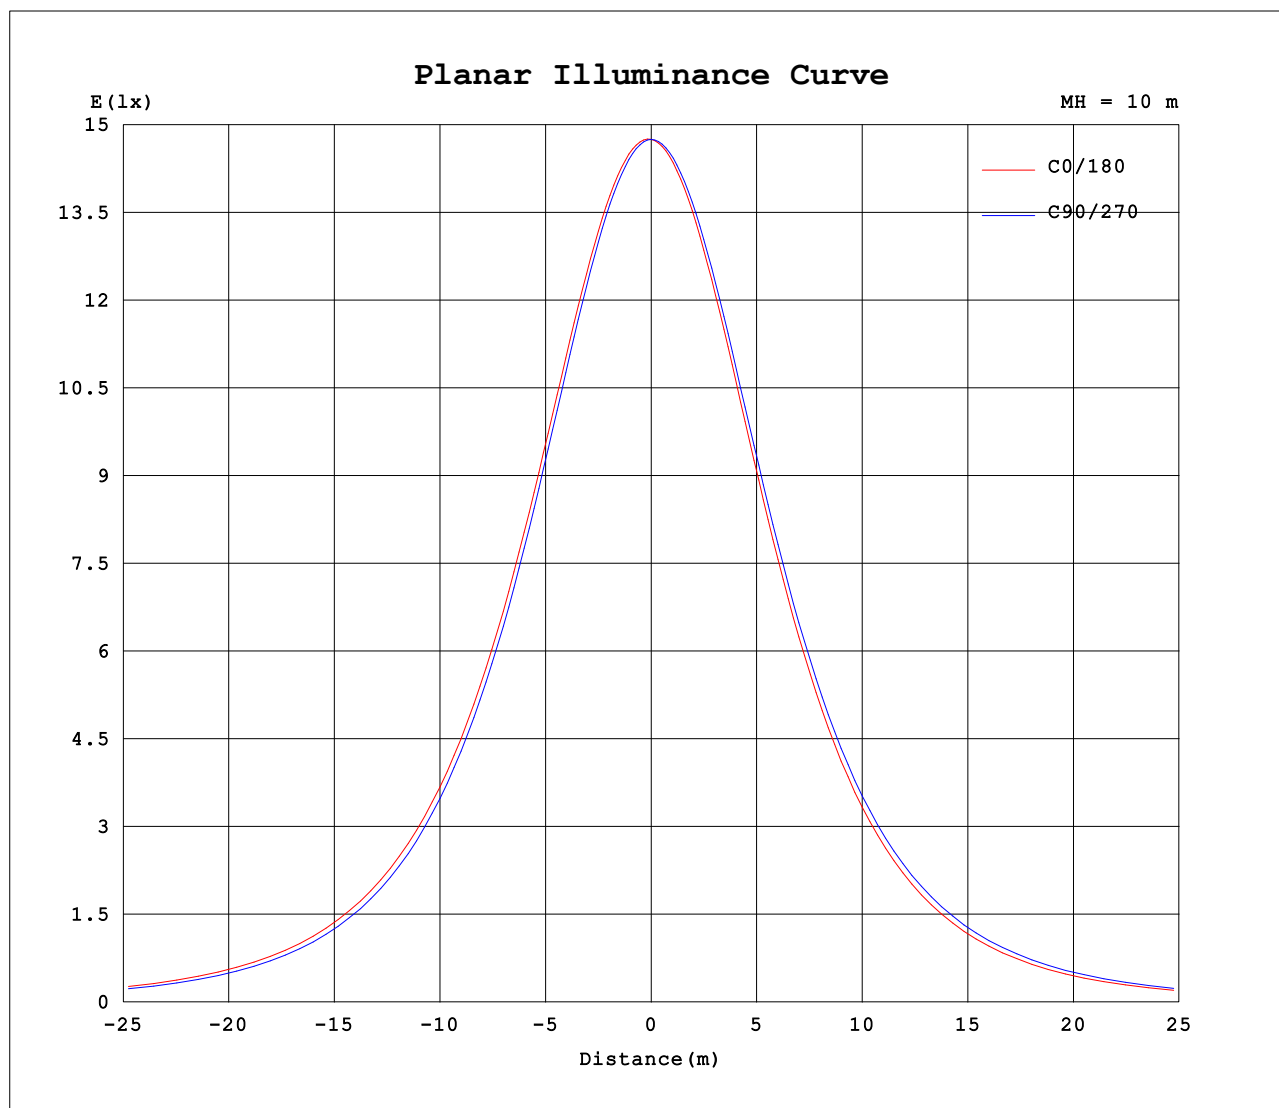

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.2380A P:28.70W PF:0.9980 Freq:60.00Hz Lamp Flux:4221.29x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1475	1474	1475	1472	1475	1474	1475	1472										
5	1475	1472	1468	1459	1463	1464	1469	1473										
10	1462	1458	1448	1433	1437	1441	1451	1461										
15	1437	1431	1416	1395	1399	1405	1421	1437										
20	1400	1392	1371	1345	1351	1358	1378	1400										
25	1351	1341	1315	1284	1289	1299	1323	1351										
30	1290	1278	1247	1212	1218	1230	1258	1291										
35	1217	1205	1169	1129	1136	1149	1181	1220										
40	1134	1120	1083	1037	1044	1058	1094	1137										
45	1042	1027	986	936	943	959	998	1046										
50	941	924	879	826	834	851	893	945										
55	831	813	766	708	718	734	781	836										
60	712	694	645	584	595	611	661	718										
65	589	570	519	456	466	483	535	594										
70	461	441	389	328	337	353	405	465										
75	332	312	263	206	212	229	276	335										
80	208	191	148	96.4	102	116	158	211										
85	99.2	83.1	53.6	15.0	17.8	30.1	57.0	102										
90	16.5	6.64	0.21	0.22	0.18	0.19	0.16	18.9										
95	0.21	0.22	0.24	0.28	0.26	0.25	0.20	0.19										
100	0.27	0.28	0.30	0.37	0.34	0.32	0.28	0.25										
105	0.36	0.35	0.39	0.46	0.44	0.41	0.36	0.32										
110	0.47	0.45	0.47	0.57	0.54	0.48	0.46	0.41										
115	0.57	0.54	0.58	0.67	0.64	0.58	0.54	0.51										
120	0.68	0.65	0.68	0.78	0.75	0.67	0.63	0.60										
125	0.78	0.74	0.79	0.88	0.85	0.85	0.73	0.70										
130	0.88	0.84	0.89	0.98	0.95	0.94	0.82	0.80										
135	0.98	0.93	1.00	1.07	1.04	1.07	0.91	0.92										
140	1.08	1.02	1.11	1.17	1.13	1.20	1.00	1.04										
145	1.17	1.12	1.22	1.25	1.23	1.35	1.09	1.12										
150	1.29	1.22	1.32	1.36	1.32	1.47	1.18	1.13										
155	1.40	1.32	1.43	1.47	1.42	1.58	1.28	1.24										
160	1.45	1.42	1.50	1.56	1.53	1.72	1.39	1.35										
165	1.48	1.49	1.58	1.63	1.61	1.87	1.47	1.44										
170	1.53	1.54	1.62	1.66	1.63	1.87	1.87	1.48										
175	1.53	1.55	1.60	1.63	1.60	1.64	1.69	1.52										
180	1.57	1.57	1.55	1.57	1.57	1.58	1.57	1.58										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: