


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 145.85 lm/W			
MODEL		I _{max} (cd)	1805	S/MH(C0/180)	1.34
NOMINAL POWER(W)	36W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	5148.6	η UP,DN(C0-180)	0.1,51.9
NOMINAL FLUX(lm)	5148.63	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

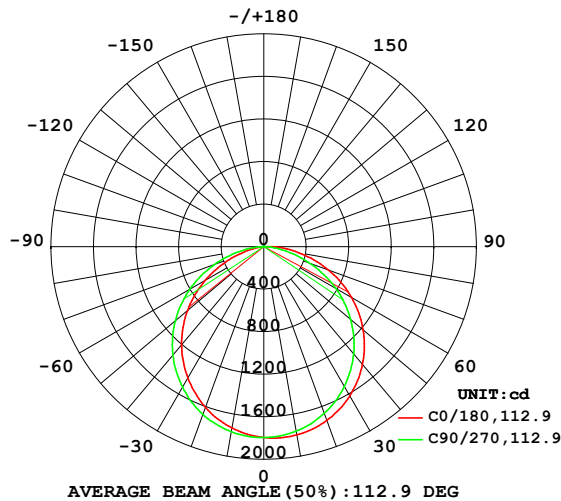

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

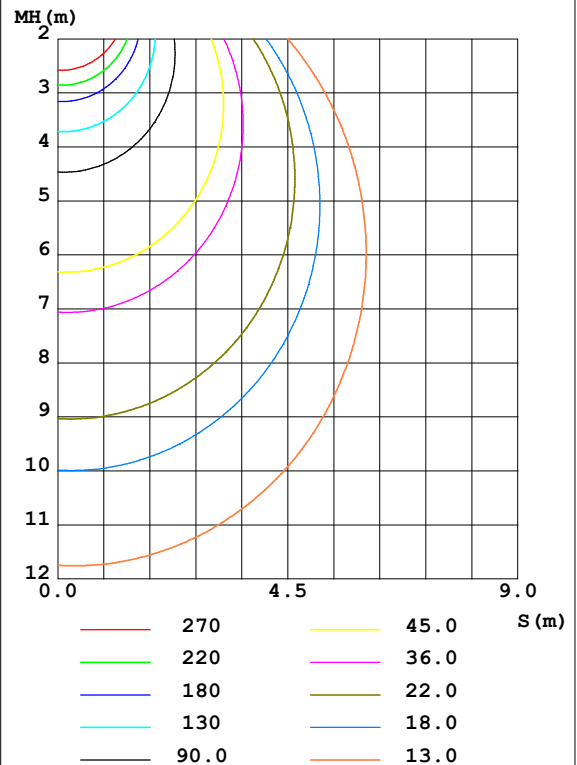

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1796	1784	1761	1750	1731	1741	1766	1786	0- 10	169.9	169.9	3.3,3.3
20	1737	1714	1667	1643	1609	1630	1678	1711	10- 20	487.3	657.3	12.8,12.8
30	1619	1584	1517	1475	1428	1463	1528	1578	20- 30	740.1	1397	27.1,27.1
40	1445	1400	1315	1262	1203	1246	1330	1391	30- 40	894.3	2292	44.5,44.5
50	1221	1169	1066	1005	936.5	985.5	1087	1157	40- 50	930.3	3222	62.6,62.6
60	952.7	898.0	782.1	710.8	637.4	686.0	805.4	879.4	50- 60	839.9	4062	78.9,78.9
70	649.4	593.5	466.4	399.2	324.7	370.0	494.0	565.5	60- 70	632.4	4694	91.2,91.2
80	334.8	283.8	173.4	117.1	62.83	97.33	194.0	256.6	70- 80	350.3	5045	98,98
90	72.61	36.46	0.3647	0.4094	0.2667	0.2421	0.1962	23.25	80- 90	94.25	5139	99.8,99.8
100	0.4478	0.4797	0.5712	0.6856	0.4799	0.4236	0.3151	0.2977	90-100	3.204	5142	99.9,99.9
110	0.7528	0.7582	0.8666	0.9957	0.7583	0.6198	0.5378	0.4963	100-110	0.6243	5143	99.9,99.9
120	1.063	1.063	1.179	1.332	1.054	0.9006	0.7680	0.7457	110-120	0.8578	5143	99.9,99.9
130	1.392	1.366	1.479	1.621	1.347	1.288	1.059	1.051	120-130	1.050	5144	99.9,99.9
140	1.695	1.652	1.782	1.906	1.650	1.680	1.345	1.440	130-140	1.140	5146	99.9,99.9
150	1.990	1.928	2.010	2.160	2.018	2.129	1.674	1.673	140-150	1.132	5147	100,100
160	2.264	2.202	2.271	2.405	2.311	2.497	1.991	1.993	150-160	0.9673	5148	100,100
170	2.349	2.361	2.417	2.509	2.473	2.725	2.553	2.221	160-170	0.6656	5148	100,100
180	2.390	2.364	2.298	2.371	2.385	2.359	2.301	2.361	170-180	0.2307	5149	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

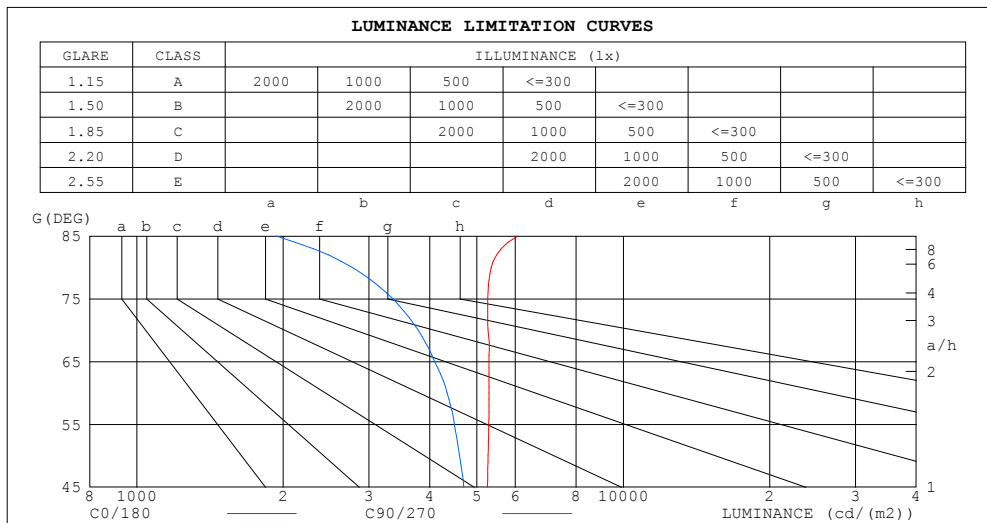


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

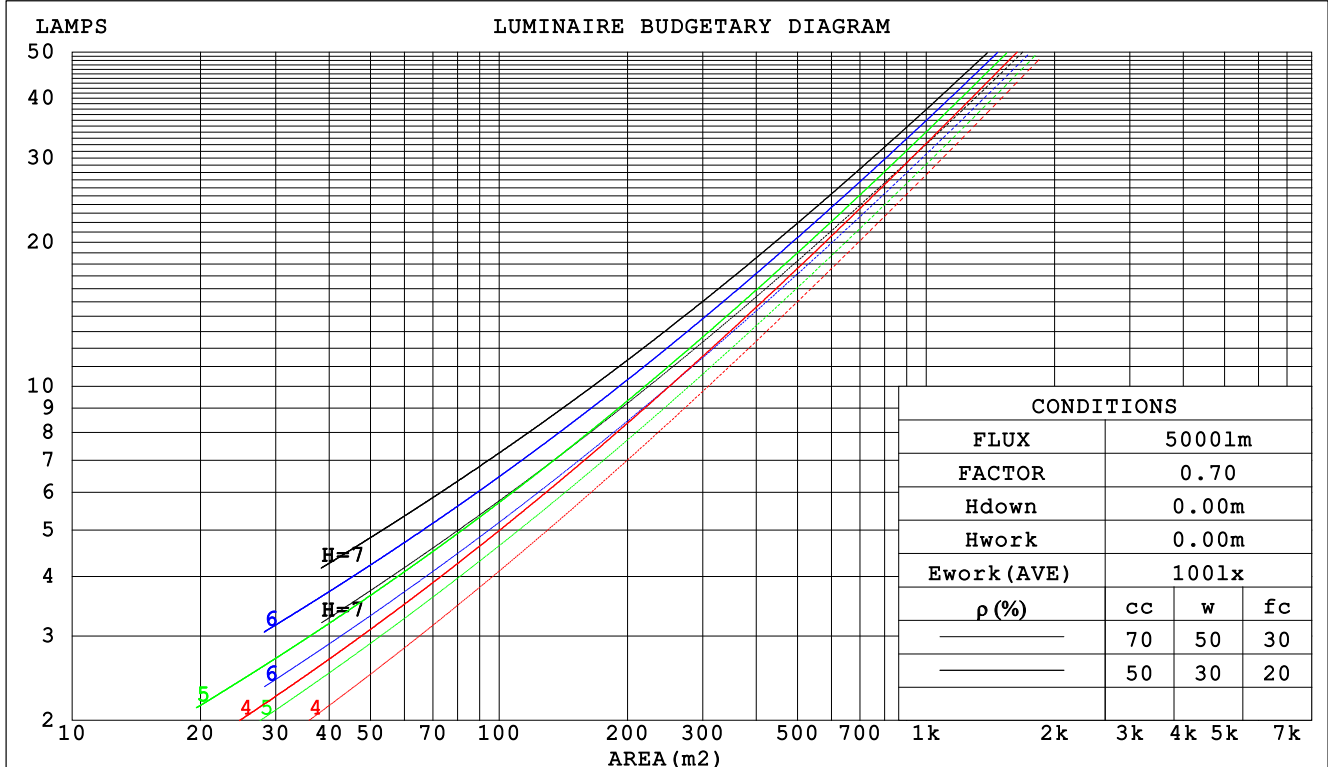

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm					
NAME: 净化灯			TYPE:3500K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.308	.175	.056	.301	.172	.055	.288	.165	.053	.276	.159	.051	.264	.153	.049	
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.142	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.195	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.100	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.041	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.089	.052	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.081	.047	.021	.047	.028	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm											
NAME: 净化灯					TYPE:3500K			WEIGHT:			
SPEC.:					DIM.: 2X2			SERIAL No.:			
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	19.1	20.6	19.4	20.8	21.0	18.4	19.9	18.7	20.1	20.3
	3H	20.9	22.3	21.2	22.5	22.8	19.8	21.2	20.1	21.5	21.7
	4H	21.7	23.0	22.0	23.3	23.5	20.4	21.7	20.7	22.0	22.2
	6H	22.4	23.6	22.7	23.9	24.2	20.7	22.0	21.1	22.2	22.5
	8H	22.6	23.8	23.0	24.1	24.4	20.8	22.0	21.1	22.3	22.6
	12H	22.9	24.0	23.2	24.3	24.6	20.8	22.0	21.2	22.3	22.6
4H	2H	19.7	21.0	20.0	21.3	21.6	19.2	20.5	19.5	20.8	21.0
	3H	21.7	22.9	22.1	23.2	23.5	20.8	22.0	21.2	22.3	22.6
	4H	22.6	23.7	23.0	24.0	24.4	21.5	22.6	21.9	22.9	23.2
	6H	23.4	24.4	23.8	24.7	25.1	22.0	22.9	22.4	23.3	23.6
	8H	23.8	24.7	24.2	25.0	25.4	22.1	23.0	22.5	23.4	23.7
	12H	24.1	24.9	24.5	25.3	25.7	22.2	23.0	22.6	23.4	23.8
8H	4H	22.9	23.8	23.3	24.2	24.5	21.9	22.8	22.3	23.2	23.6
	6H	23.9	24.6	24.3	25.0	25.5	22.6	23.3	23.0	23.7	24.2
	8H	24.4	25.0	24.8	25.4	25.9	22.8	23.5	23.3	23.9	24.3
	12H	24.8	25.4	25.3	25.8	26.3	23.0	23.5	23.4	24.0	24.4
12H	4H	22.9	23.7	23.3	24.1	24.5	22.0	22.8	22.4	23.2	23.6
	6H	24.0	24.6	24.4	25.0	25.5	22.7	23.4	23.2	23.8	24.2
	8H	24.5	25.0	25.0	25.5	26.0	23.0	23.6	23.5	24.0	24.5
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 5149 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

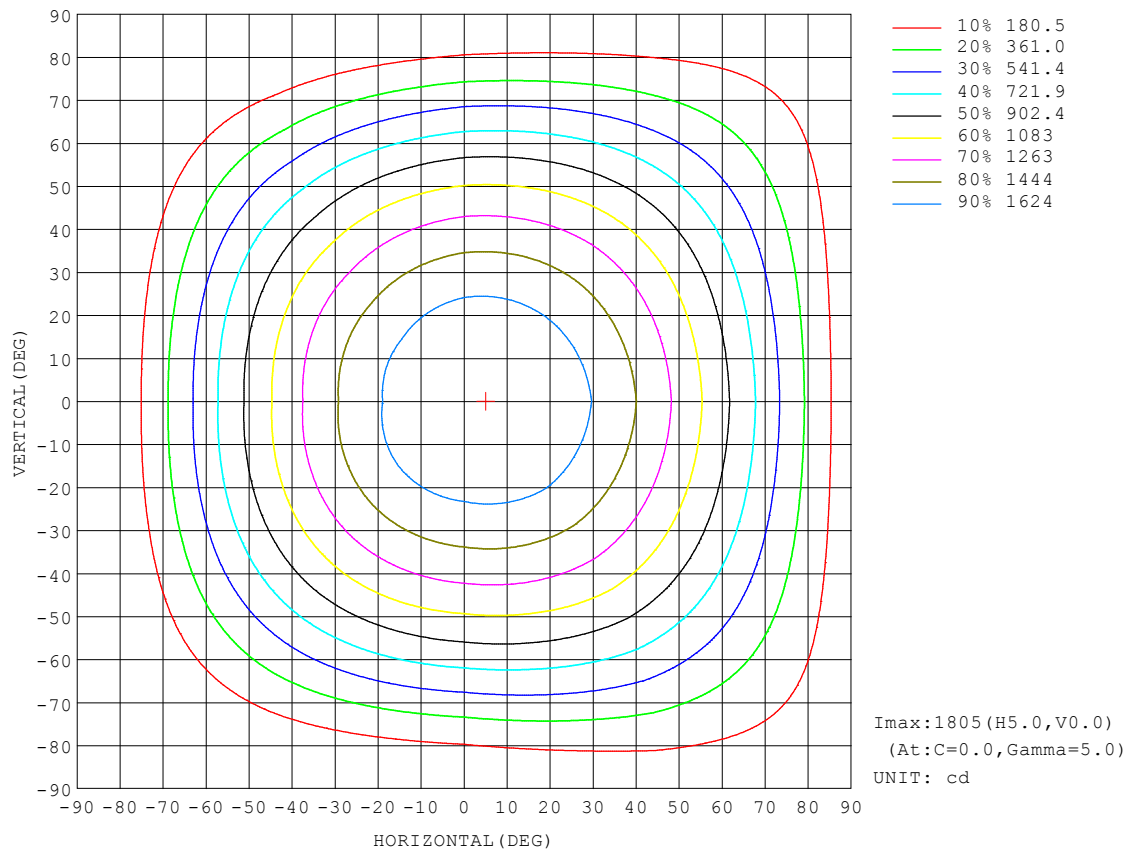


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

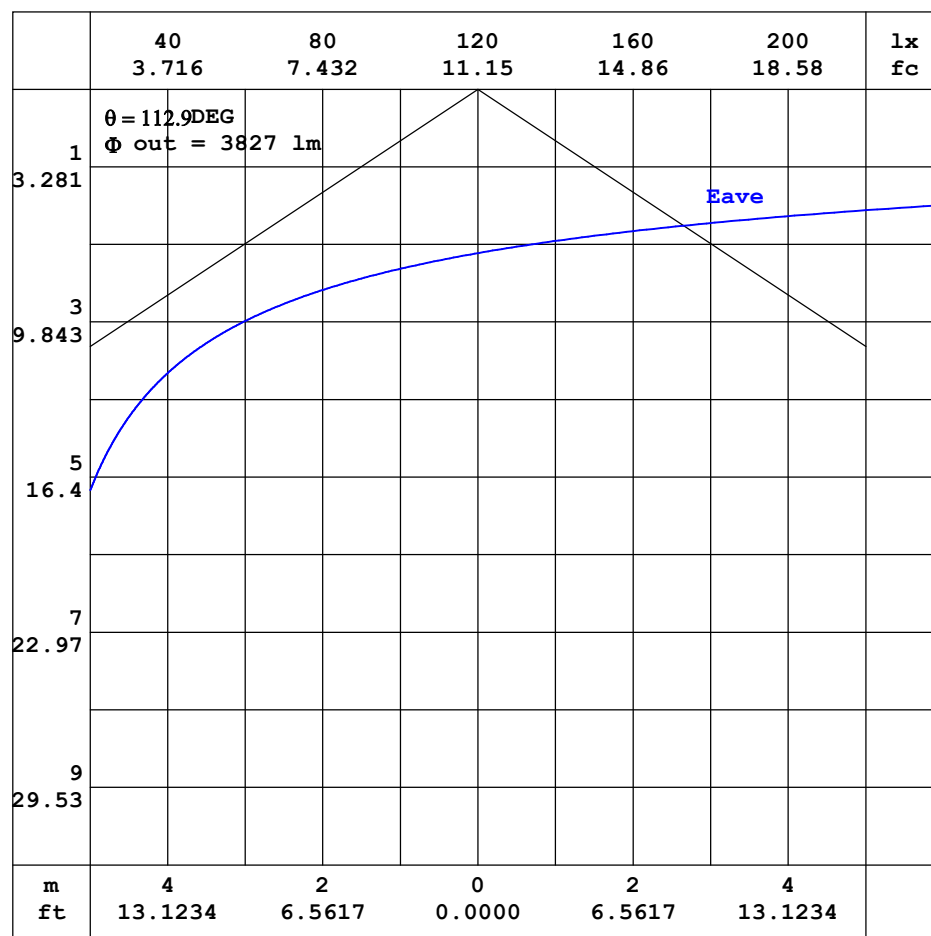


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

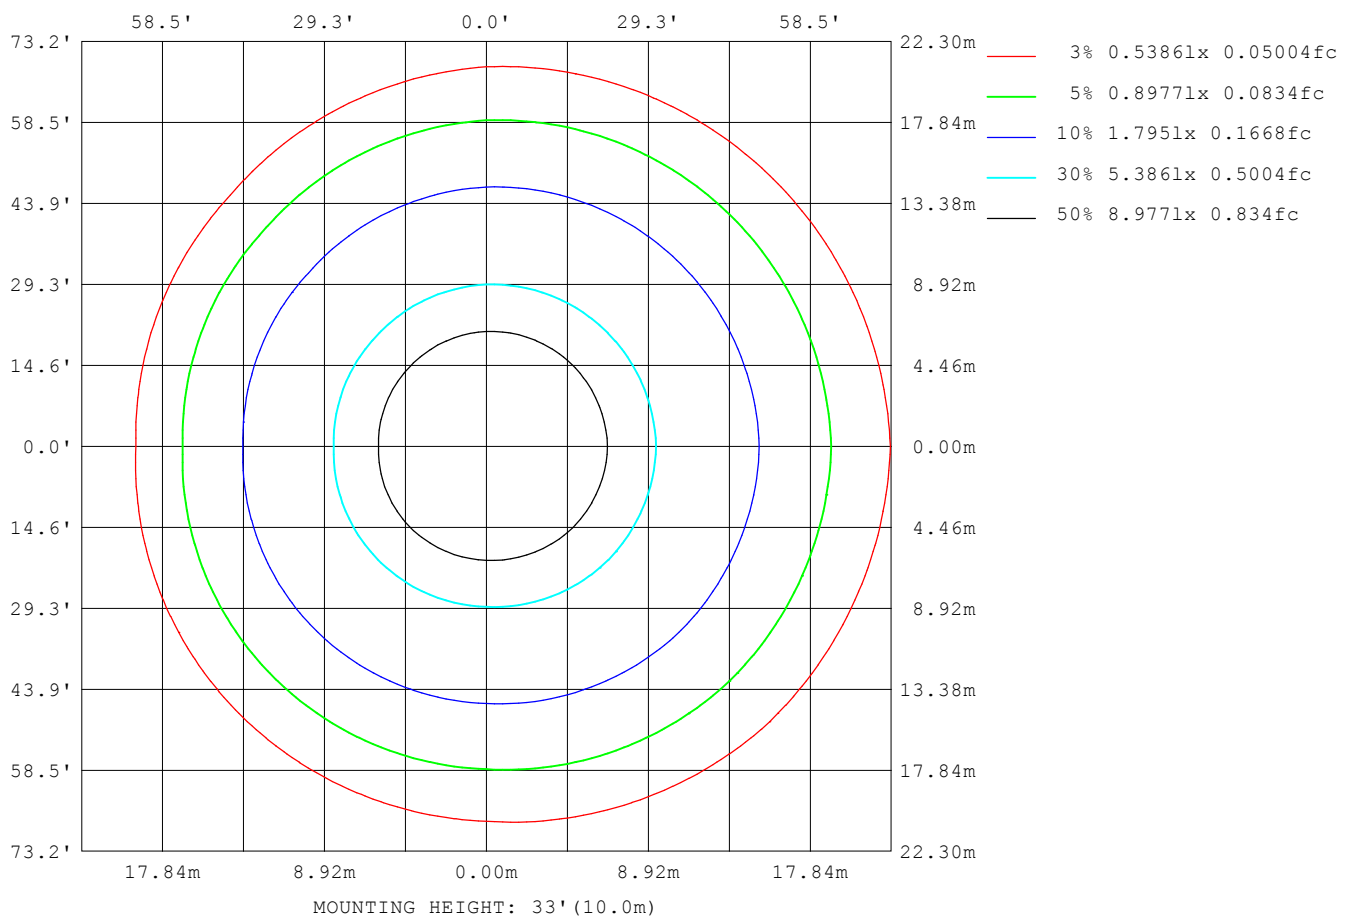

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4226
L_0~180 (75) av	3611
L_0~180 (85) av	3038
L_90~270 (65) av	4189
L_90~270 (75) av	3492
L_90~270 (85) av	2105
L_45 (65) av	4203
L_45 (75) av	3539
L_45 (85) av	2363

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

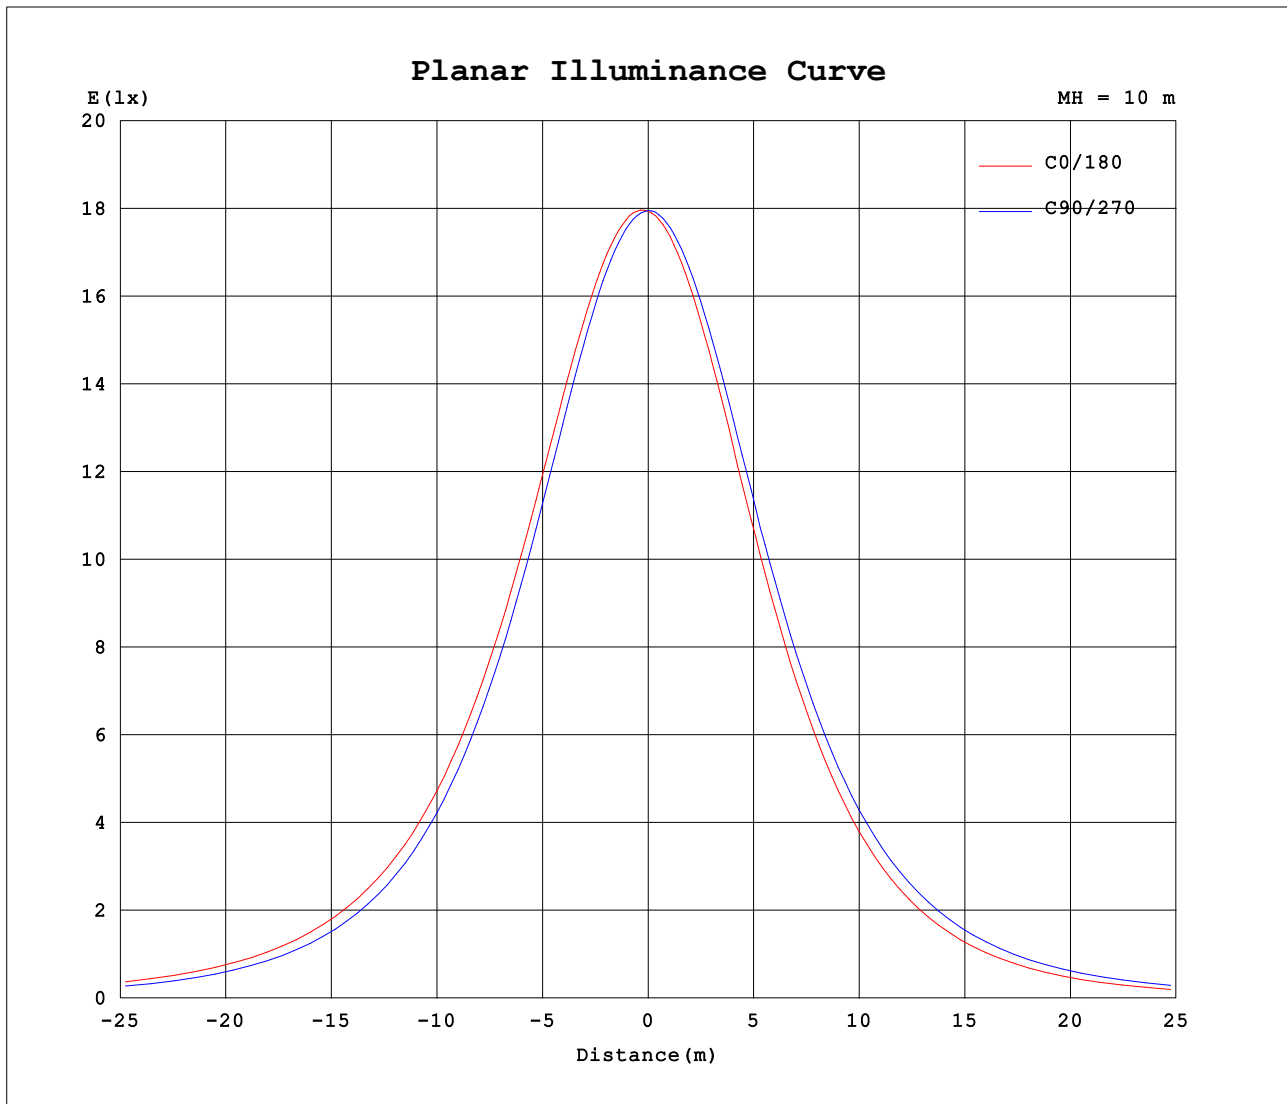

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.2930A P:35.30W PF:0.9980 Freq:60.00Hz Lamp Flux:5148.63x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1794	1793	1795	1798	1794	1793	1795	1798										
5	1805	1797	1786	1782	1771	1775	1788	1800										
10	1796	1784	1761	1750	1731	1741	1766	1786										
15	1775	1757	1722	1704	1677	1693	1730	1756										
20	1737	1714	1667	1643	1609	1630	1678	1711										
25	1687	1657	1600	1565	1521	1553	1612	1652										
30	1619	1584	1517	1475	1428	1463	1528	1578										
35	1538	1497	1422	1374	1320	1361	1435	1491										
40	1445	1400	1315	1262	1203	1246	1330	1391										
45	1338	1291	1197	1139	1074	1121	1213	1280										
50	1221	1169	1066	1005	936	985	1087	1157										
55	1092	1038	929	862	790	840	950	1023										
60	953	898	782	711	637	686	805	879										
65	806	749	623	555	480	526	652	727										
70	649	593	466	399	325	370	494	566										
75	491	436	313	251	182	224	338	409										
80	335	284	173	117	62.8	97.3	194	257										
85	190	146	60.7	18.2	0.20	7.53	71.4	125										
90	72.6	36.5	0.36	0.41	0.27	0.24	0.20	23.3										
95	0.41	0.37	0.44	0.54	0.37	0.32	0.24	0.23										
100	0.45	0.48	0.57	0.69	0.48	0.42	0.32	0.30										
105	0.58	0.62	0.71	0.84	0.61	0.54	0.43	0.38										
110	0.75	0.76	0.87	1.00	0.76	0.62	0.54	0.50										
115	0.91	0.90	1.02	1.17	0.91	0.76	0.63	0.61										
120	1.06	1.06	1.18	1.33	1.05	0.90	0.77	0.75										
125	1.23	1.22	1.33	1.49	1.20	1.13	0.91	0.91										
130	1.39	1.37	1.48	1.62	1.35	1.29	1.06	1.05										
135	1.55	1.51	1.64	1.78	1.48	1.46	1.19	1.23										
140	1.69	1.65	1.78	1.91	1.65	1.68	1.34	1.44										
145	1.83	1.79	1.93	2.02	1.87	1.95	1.54	1.61										
150	1.99	1.93	2.01	2.16	2.02	2.13	1.67	1.67										
155	2.15	2.09	2.15	2.30	2.16	2.28	1.84	1.83										
160	2.26	2.20	2.27	2.41	2.31	2.50	1.99	1.99										
165	2.29	2.30	2.37	2.48	2.42	2.70	2.13	2.13										
170	2.35	2.36	2.42	2.51	2.47	2.72	2.55	2.22										
175	2.34	2.34	2.37	2.47	2.44	2.46	2.42	2.28										
180	2.39	2.36	2.30	2.37	2.39	2.36	2.30	2.36										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: