


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 142.36 lm/W			
MODEL		I _{max} (cd)	1795	S/MH(C0/180)	1.34
NOMINAL POWER(W)	36W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	5125.0	η UP,DN(C0-180)	0.1,52.0
NOMINAL FLUX(lm)	5125.01	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

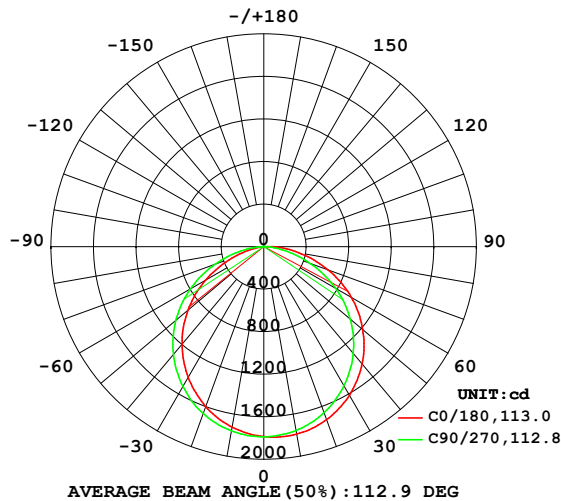

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

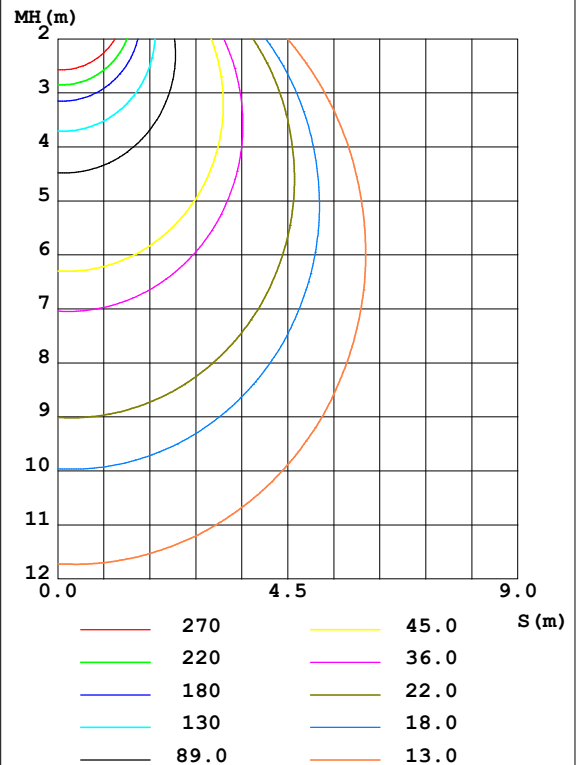

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1789	1776	1754	1742	1722	1733	1758	1778	0- 10	169.1	169.1	3.3,3.3
20	1730	1707	1660	1636	1602	1622	1670	1703	10- 20	485.1	654.3	12.8,12.8
30	1613	1578	1509	1468	1421	1456	1519	1571	20- 30	736.5	1391	27.1,27.1
40	1440	1394	1310	1256	1197	1239	1323	1385	30- 40	890.2	2281	44.5,44.5
50	1215	1165	1063	1000	931.8	979.2	1080	1151	40- 50	926.1	3207	62.6,62.6
60	950.5	895.2	779.3	709.3	634.2	681.4	800.3	875.6	50- 60	836.1	4043	78.9,78.9
70	643.5	592.4	467.0	398.7	322.8	367.7	489.4	563.0	60- 70	629.6	4673	91.2,91.2
80	333.3	284.3	175.1	116.9	62.35	95.74	191.1	255.1	70- 80	348.7	5021	98,98
90	72.98	37.21	0.3313	0.3731	0.2666	0.2445	0.1985	22.43	80- 90	94.00	5115	99.8,99.8
100	0.4139	0.4410	0.5253	0.6299	0.4798	0.4212	0.3246	0.2953	90-100	3.204	5119	99.9,99.9
110	0.6946	0.7001	0.8084	0.9374	0.7487	0.6369	0.5402	0.4914	100-110	0.5945	5119	99.9,99.9
120	0.9925	0.9907	1.094	1.235	1.039	0.8838	0.7752	0.7456	110-120	0.8186	5120	99.9,99.9
130	1.300	1.269	1.375	1.521	1.323	1.259	1.039	1.031	120-130	1.002	5121	99.9,99.9
140	1.593	1.541	1.673	1.778	1.592	1.615	1.308	1.380	130-140	1.089	5122	99.9,99.9
150	1.874	1.809	1.903	2.030	1.911	2.024	1.616	1.593	140-150	1.074	5123	100,100
160	2.146	2.090	2.174	2.274	2.207	2.385	1.916	1.911	150-160	0.9187	5124	100,100
170	2.235	2.235	2.293	2.383	2.361	2.567	2.432	2.121	160-170	0.6337	5125	100,100
180	2.279	2.245	2.192	2.243	2.262	2.243	2.199	2.255	170-180	0.2195	5125	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

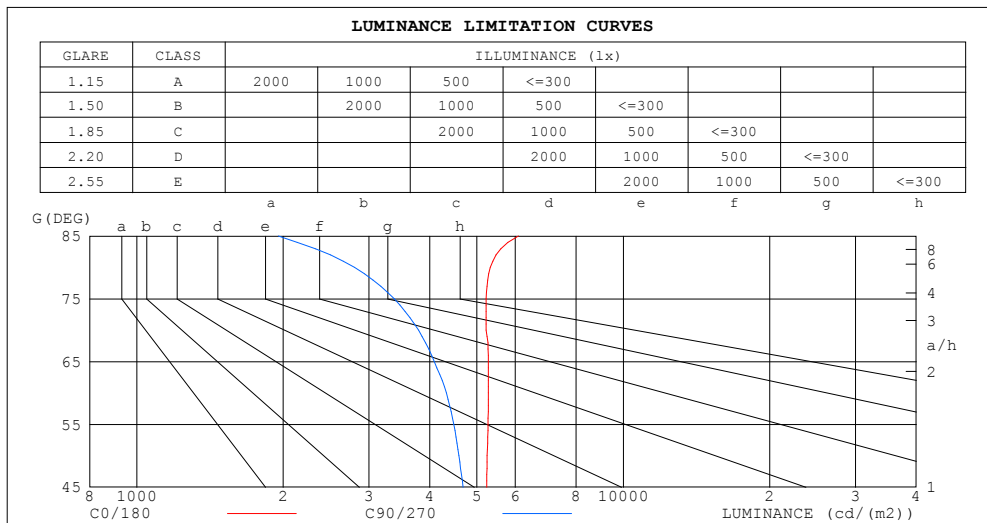

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6086	1953
80	5331	2801
75	5227	3385
70	5227	3793
65	5281	4088
60	5281	4329
55	5274	4483
50	5251	4593
45	5240	4682


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

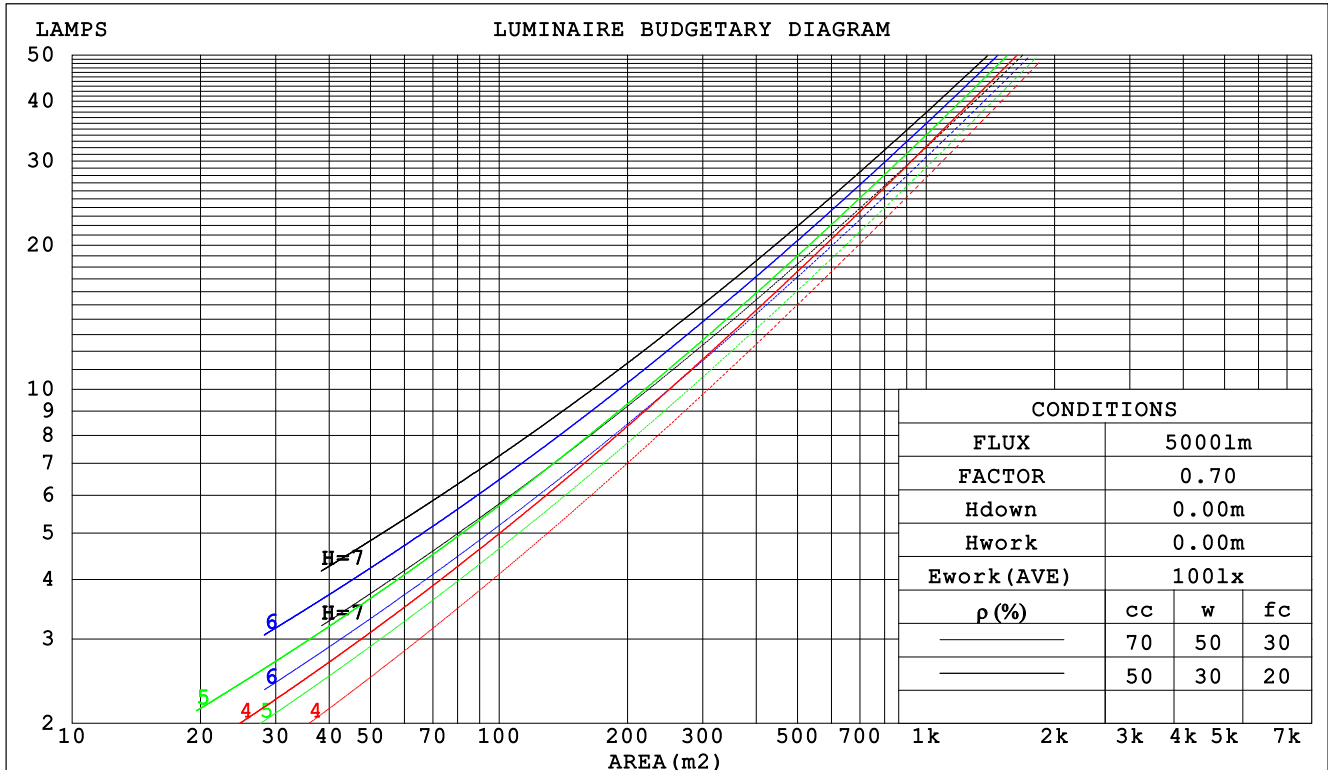

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm					
NAME: 净化灯			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.308	.175	.056	.301	.172	.055	.288	.165	.053	.276	.159	.051	.264	.153	.049		
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.142	.045		
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.244	.134	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.195	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.100	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.041	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.089	.052	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm												
NAME: 净化灯					TYPE:4000K			WEIGHT:				
SPEC.:					DIM.: 2X2			SERIAL No.:				
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	19.1	20.6	19.4	20.8	21.0	18.4	19.9	18.7	20.1	20.3	
	3H	20.9	22.3	21.2	22.5	22.8	19.8	21.2	20.1	21.5	21.7	
	4H	21.7	23.0	22.0	23.3	23.5	20.4	21.7	20.7	22.0	22.2	
	6H	22.3	23.6	22.7	23.9	24.2	20.7	22.0	21.1	22.3	22.5	
	8H	22.6	23.8	23.0	24.1	24.4	20.8	22.0	21.2	22.3	22.6	
	12H	22.9	24.0	23.2	24.3	24.6	20.8	22.0	21.2	22.3	22.6	
	4H	2H	19.7	21.0	20.0	21.3	21.6	19.2	20.5	19.5	20.8	21.0
	3H	21.7	22.9	22.0	23.2	23.5	20.8	22.0	21.2	22.3	22.6	
	4H	22.6	23.7	23.0	24.0	24.3	21.5	22.6	21.9	22.9	23.2	
	6H	23.4	24.4	23.8	24.7	25.1	22.0	22.9	22.4	23.3	23.7	
	8H	23.8	24.7	24.2	25.0	25.4	22.1	23.0	22.5	23.4	23.8	
	12H	24.1	24.9	24.5	25.3	25.7	22.2	23.0	22.6	23.4	23.8	
8H	4H	22.9	23.8	23.3	24.1	24.5	21.9	22.8	22.4	23.2	23.6	
6H	23.9	24.6	24.3	25.0	25.5	22.6	23.3	23.0	23.7	24.2		
8H	24.4	25.0	24.8	25.4	25.9	22.8	23.5	23.3	23.9	24.4		
12H	24.8	25.4	25.3	25.8	26.3	23.0	23.5	23.5	24.0	24.5		
12H	4H	22.9	23.7	23.3	24.1	24.5	22.0	22.8	22.4	23.2	23.6	
6H	24.0	24.6	24.4	25.0	25.5	22.7	23.4	23.2	23.8	24.3		
8H	24.5	25.0	25.0	25.5	26.0	23.0	23.6	23.5	24.0	24.5		
Variations with the observer position at spacings:												
S = 1.0H		+ 0.1 / - 0.1					+ 0.2 / - 0.2					
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.4					
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117 Corrected 5125 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

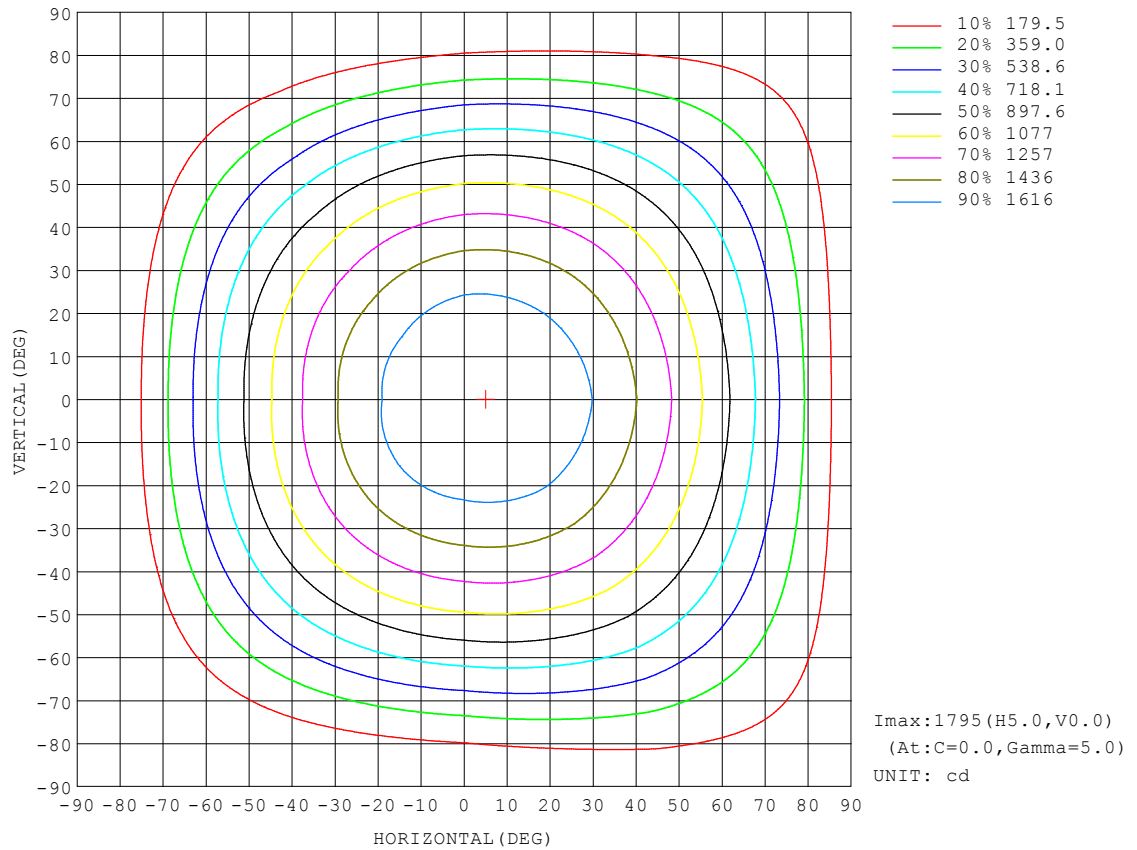


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

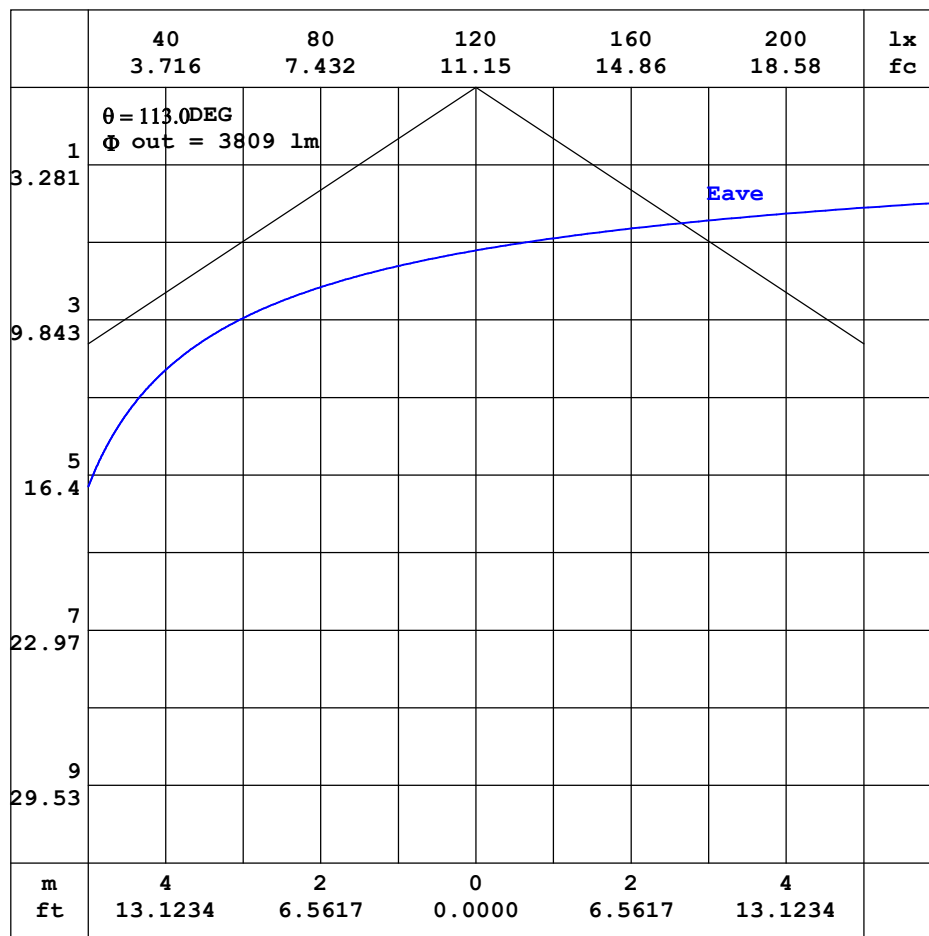


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

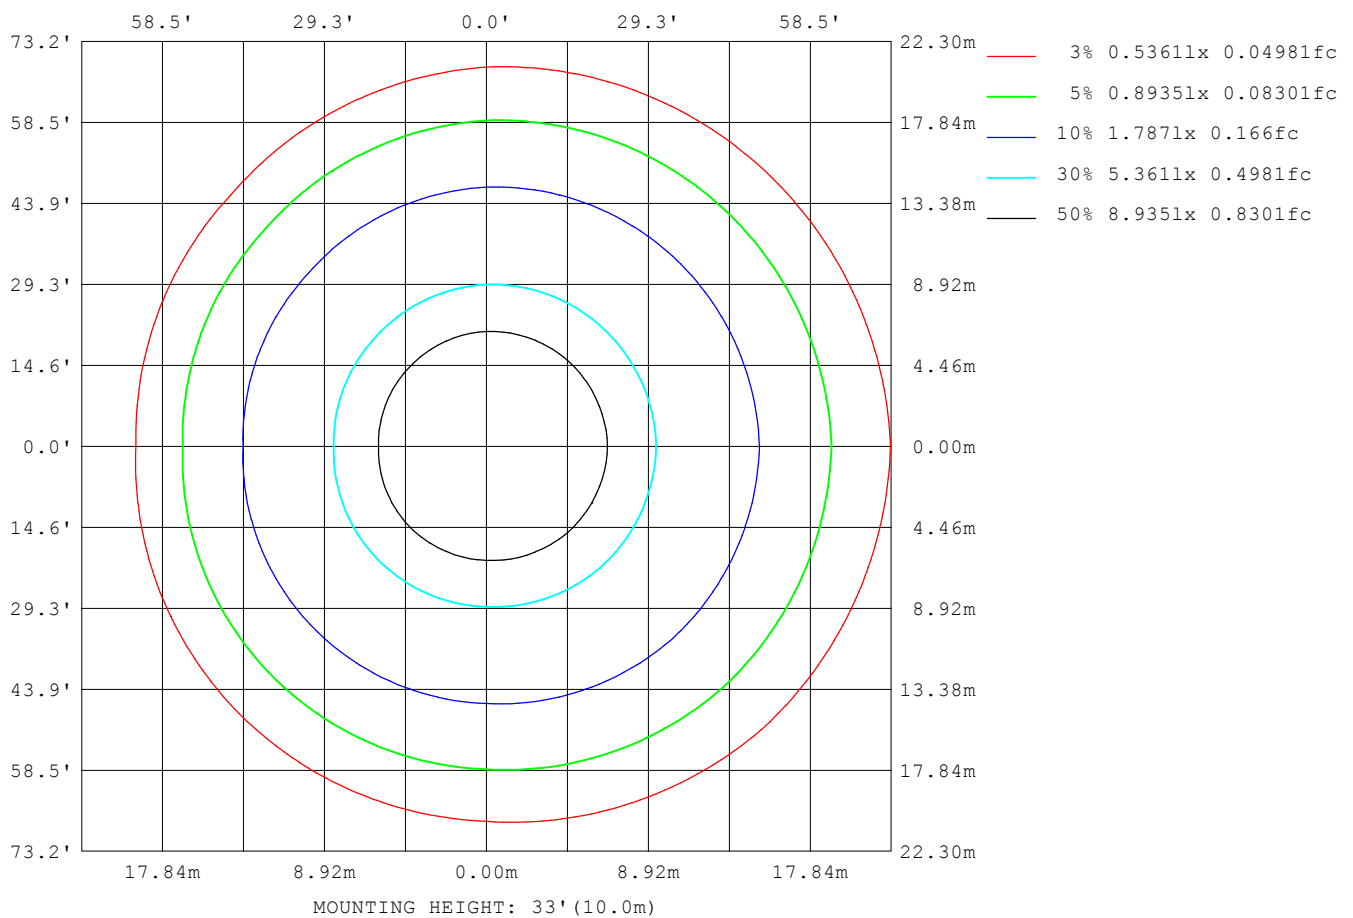

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4209
L_0~180 (75) av	3584
L_0~180 (85) av	3047
L_90~270 (65) av	4170
L_90~270 (75) av	3485
L_90~270 (85) av	2085
L_45 (65) av	4188
L_45 (75) av	3522
L_45 (85) av	2360

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

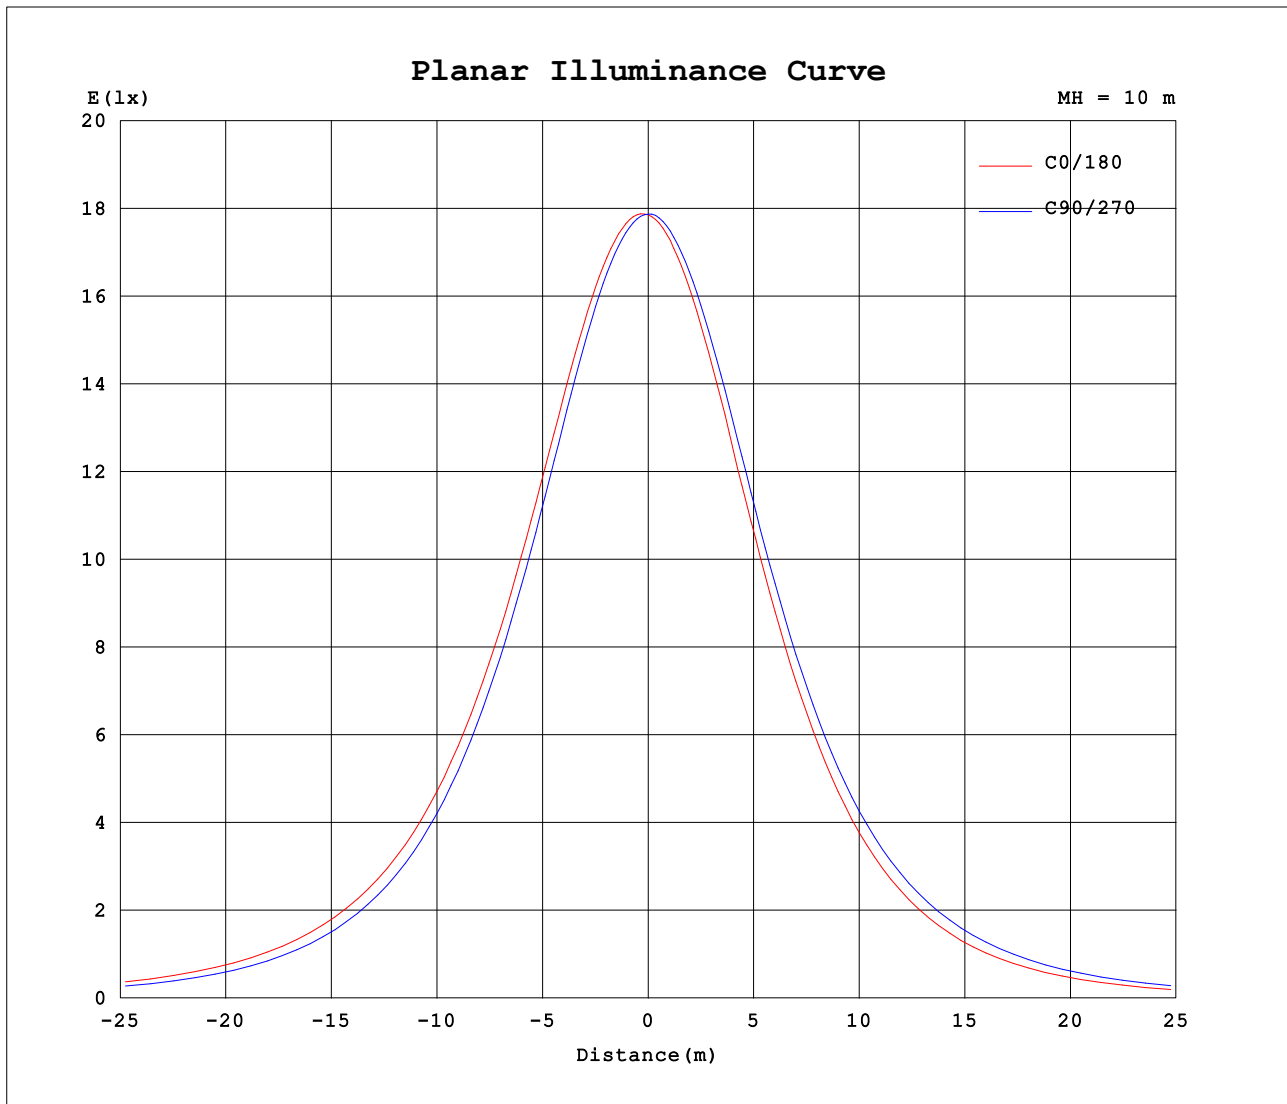

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.2990A P:36.00W PF:0.9970 Freq:60.00Hz Lamp Flux:5125.01x1 lm								
NAME: 净化灯					TYPE:4000K			WEIGHT:
SPEC.:					DIM.: 2X2			SERIAL No.:
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1786	1785	1788	1791	1786	1785	1788	1791										
5	1795	1789	1778	1774	1762	1766	1781	1792										
10	1789	1776	1754	1742	1722	1733	1758	1778										
15	1768	1750	1715	1696	1669	1685	1722	1748										
20	1730	1707	1660	1636	1602	1622	1670	1703										
25	1679	1651	1592	1556	1514	1545	1605	1643										
30	1613	1578	1509	1468	1421	1456	1519	1571										
35	1531	1491	1415	1368	1315	1354	1427	1484										
40	1440	1394	1310	1256	1197	1239	1323	1385										
45	1334	1286	1192	1134	1069	1115	1206	1274										
50	1215	1165	1063	1000	932	979	1080	1151										
55	1089	1034	926	858	786	835	944	1017										
60	951	895	779	709	634	681	800	876										
65	803	747	622	554	477	524	647	724										
70	644	592	467	399	323	368	489	563										
75	487	436	315	250	181	221	334	406										
80	333	284	175	117	62.4	95.7	191	255										
85	191	147	61.3	18.5	0.21	6.96	69.6	124										
90	73.0	37.2	0.33	0.37	0.27	0.24	0.20	22.4										
95	0.38	0.34	0.40	0.49	0.38	0.32	0.23	0.23										
100	0.41	0.44	0.53	0.63	0.48	0.42	0.32	0.30										
105	0.54	0.56	0.65	0.78	0.61	0.54	0.42	0.39										
110	0.69	0.70	0.81	0.94	0.75	0.64	0.54	0.49										
115	0.83	0.83	0.94	1.09	0.90	0.75	0.63	0.61										
120	0.99	0.99	1.09	1.24	1.04	0.88	0.78	0.75										
125	1.15	1.13	1.24	1.38	1.19	1.11	0.90	0.89										
130	1.30	1.27	1.38	1.52	1.32	1.26	1.04	1.03										
135	1.45	1.40	1.53	1.65	1.44	1.42	1.17	1.20										
140	1.59	1.54	1.67	1.78	1.59	1.61	1.31	1.38										
145	1.73	1.68	1.82	1.91	1.78	1.86	1.47	1.54										
150	1.87	1.81	1.90	2.03	1.91	2.02	1.62	1.59										
155	2.03	1.96	2.05	2.17	2.06	2.18	1.76	1.74										
160	2.15	2.09	2.17	2.27	2.21	2.39	1.92	1.91										
165	2.18	2.19	2.25	2.34	2.32	2.57	2.04	2.03										
170	2.24	2.24	2.29	2.38	2.36	2.57	2.43	2.12										
175	2.24	2.23	2.26	2.35	2.33	2.34	2.29	2.17										
180	2.28	2.24	2.19	2.24	2.26	2.24	2.20	2.25										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: