


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.81 lm/W			
MODEL		I _{max} (cd)	1485	S/MH(C0/180)	1.34
NOMINAL POWER(W)	30W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4242.8	η UP,DN(C0-180)	0.1,52.0
NOMINAL FLUX(lm)	4242.82	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

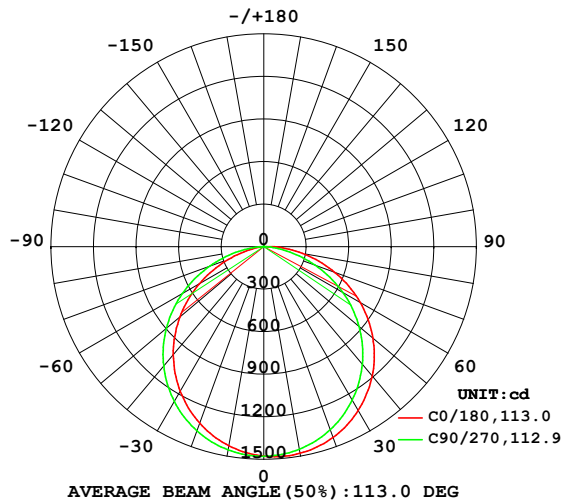

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

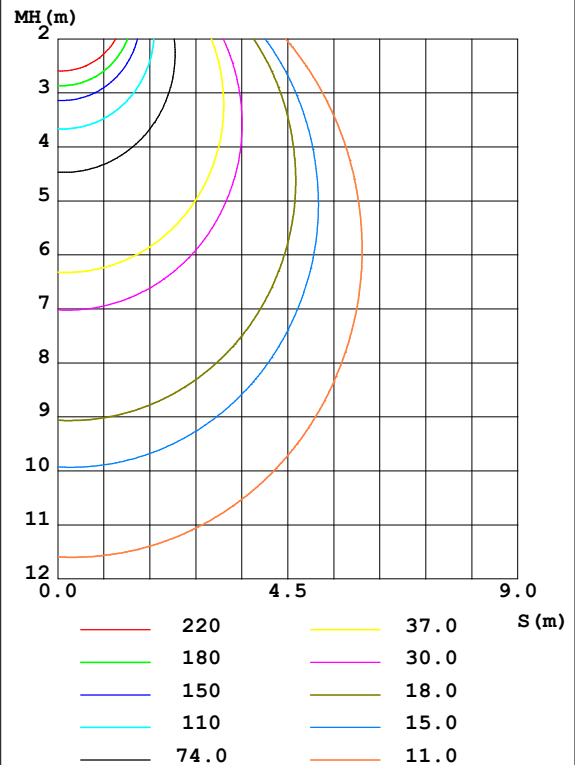

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1480	1469	1450	1441	1425	1433	1455	1469	0- 10	139.9	139.9	3.3,3.3
20	1431	1412	1373	1353	1324	1341	1382	1408	10- 20	401.2	541.1	12.8,12.8
30	1332	1306	1249	1219	1179	1203	1262	1299	20- 30	609.6	1151	27.1,27.1
40	1190	1157	1082	1043	993.4	1024	1098	1145	30- 40	737.2	1888	44.5,44.5
50	1004	966.2	877.9	829.5	773.0	809.5	897.3	951.5	40- 50	766.8	2655	62.6,62.6
60	785.1	741.3	642.1	587.6	525.9	564.7	664.8	723.2	50- 60	692.1	3347	78.9,78.9
70	534.9	489.4	386.6	330.1	267.7	305.3	407.2	468.4	60- 70	521.5	3868	91.2,91.2
80	277.9	234.3	144.5	96.16	51.50	80.17	160.0	212.9	70- 80	289.4	4158	98,98
90	59.67	30.11	0.1841	0.2133	0.2158	0.1961	0.1526	19.42	80- 90	78.03	4236	99.8,99.8
100	0.2324	0.2471	0.2928	0.3659	0.3998	0.3535	0.2689	0.2469	90-100	2.562	4238	99.9,99.9
110	0.4138	0.3973	0.4624	0.5596	0.6057	0.5254	0.4458	0.4043	100-110	0.4073	4239	99.9,99.9
120	0.6028	0.5910	0.6657	0.7800	0.8019	0.7214	0.6153	0.6198	110-120	0.5670	4239	99.9,99.9
130	0.8111	0.7848	0.8691	0.9811	1.020	0.9854	0.8043	0.8061	120-130	0.6978	4240	99.9,99.9
140	1.029	0.9737	1.085	1.175	1.199	1.225	0.9859	1.036	130-140	0.7602	4241	100,100
150	1.225	1.187	1.295	1.361	1.369	1.489	1.172	1.136	140-150	0.7408	4242	100,100
160	1.443	1.385	1.504	1.565	1.553	1.726	1.371	1.344	150-160	0.6382	4242	100,100
170	1.501	1.509	1.625	1.664	1.654	1.875	1.790	1.482	160-170	0.4430	4243	100,100
180	1.552	1.543	1.557	1.572	1.557	1.548	1.543	1.579	170-180	0.1535	4243	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

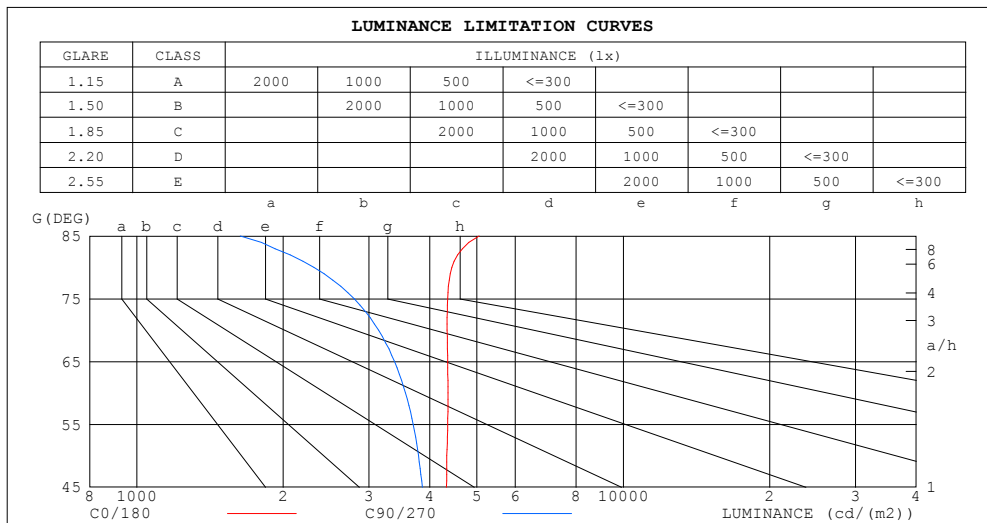

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5050	1632
80	4445	2311
75	4353	2800
70	4344	3140
65	4356	3387
60	4362	3567
55	4356	3700
50	4339	3794
45	4332	3866


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

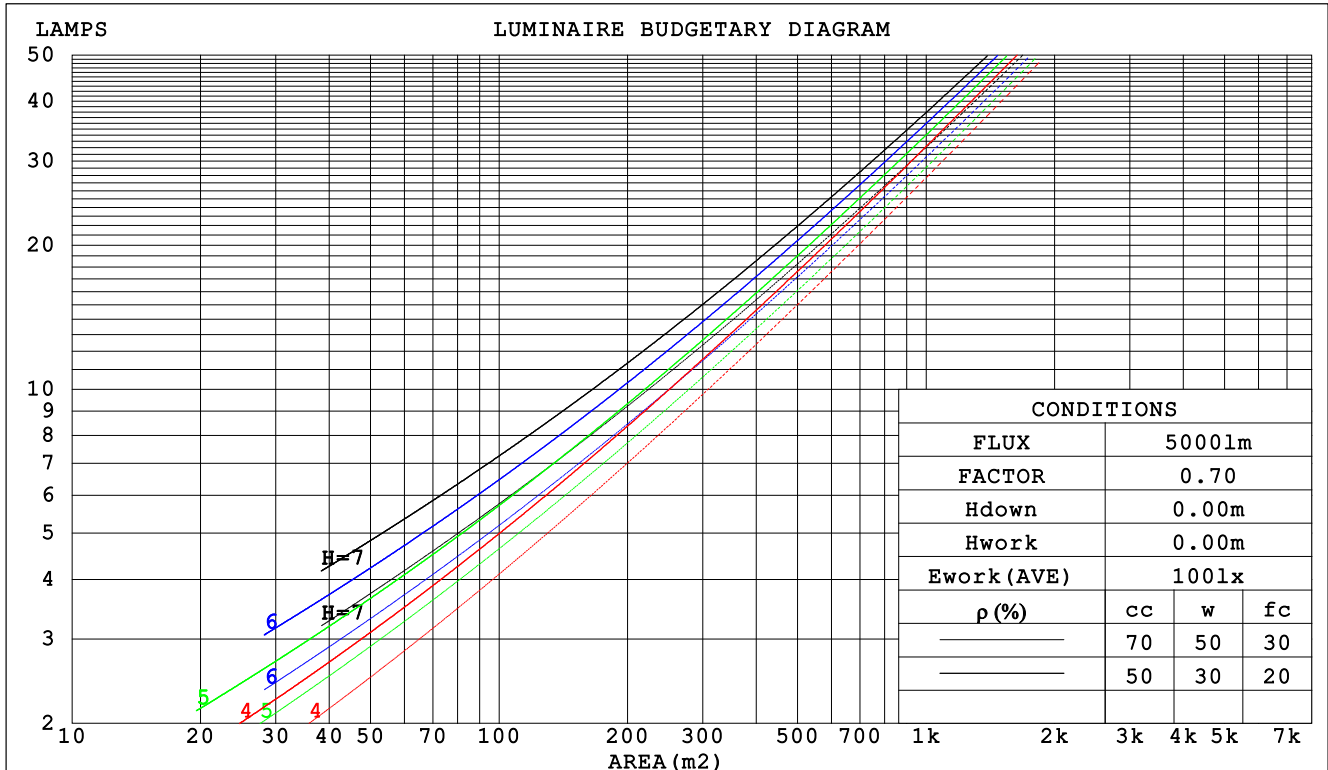

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm					
NAME: 净化灯			TYPE:3500K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.309	.176	.056	.302	.172	.055	.288	.165	.053	.276	.159	.051	.265	.153	.049		
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045		
3.0	.270	.143	.043	.264	.141	.043	.254	.137	.042	.244	.134	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.235	.125	.037	.226	.121	.037	.218	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.088	.052	.093	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.048	.129	.079	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.034	.118	.066	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.061	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.026	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.062	.024	.102	.053	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm										
NAME: 净化灯					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.: 2X2			SERIAL No.:		
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.4	19.9	18.7	20.2	20.4	17.7	19.3	18.0	19.5	19.7
3H	20.2	21.6	20.5	21.9	22.1	19.2	20.6	19.5	20.8	21.1
4H	21.0	22.4	21.3	22.6	22.9	19.7	21.1	20.0	21.3	21.6
6H	21.7	23.0	22.0	23.2	23.5	20.1	21.3	20.4	21.6	21.9
8H	22.0	23.2	22.3	23.5	23.8	20.2	21.4	20.5	21.7	21.9
12H	22.2	23.4	22.6	23.7	24.0	20.2	21.4	20.5	21.7	22.0
4H 2H	19.0	20.4	19.4	20.6	20.9	18.5	19.8	18.8	20.1	20.4
3H	21.0	22.2	21.4	22.5	22.8	20.2	21.3	20.5	21.6	21.9
4H	22.0	23.0	22.3	23.4	23.7	20.9	21.9	21.2	22.2	22.6
6H	22.8	23.7	23.2	24.1	24.5	21.3	22.3	21.7	22.6	23.0
8H	23.1	24.0	23.6	24.4	24.8	21.5	22.3	21.9	22.7	23.1
12H	23.5	24.3	23.9	24.7	25.1	21.5	22.3	22.0	22.7	23.1
8H 4H	22.2	23.1	22.7	23.5	23.9	21.3	22.2	21.7	22.5	22.9
6H	23.2	24.0	23.7	24.4	24.8	21.9	22.7	22.4	23.1	23.5
8H	23.7	24.4	24.2	24.8	25.2	22.2	22.8	22.6	23.2	23.7
12H	24.2	24.7	24.6	25.2	25.6	22.3	22.9	22.8	23.3	23.8
12H 4H	22.3	23.1	22.7	23.5	23.9	21.3	22.1	21.8	22.5	22.9
6H	23.3	24.0	23.8	24.4	24.8	22.1	22.7	22.5	23.1	23.6
8H	23.8	24.4	24.3	24.8	25.3	22.4	22.9	22.8	23.4	23.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 4243 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

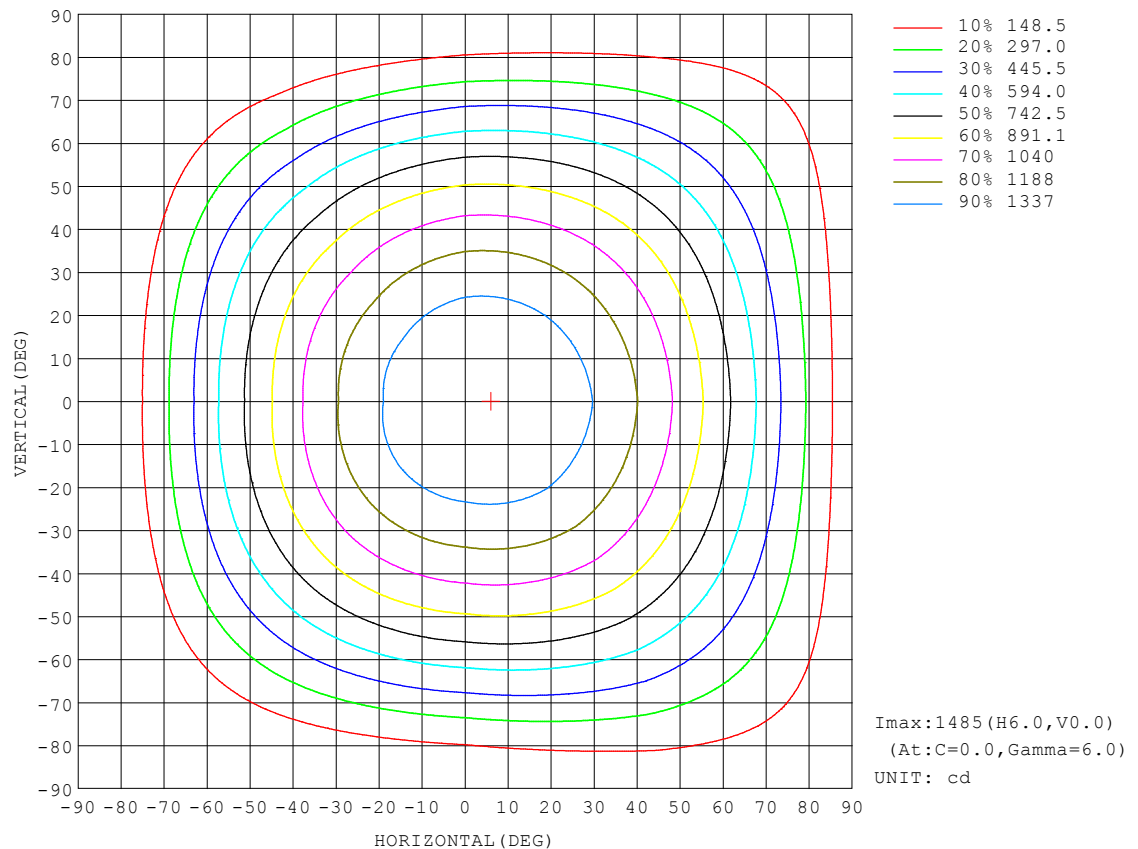


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

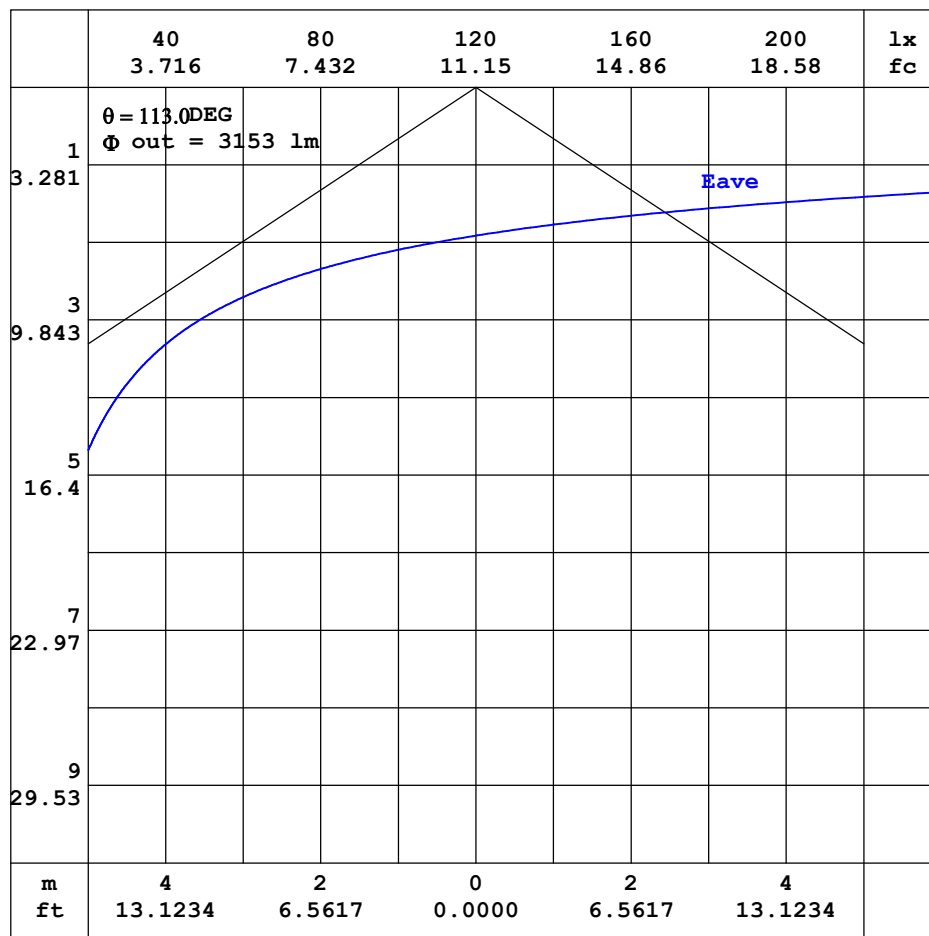


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

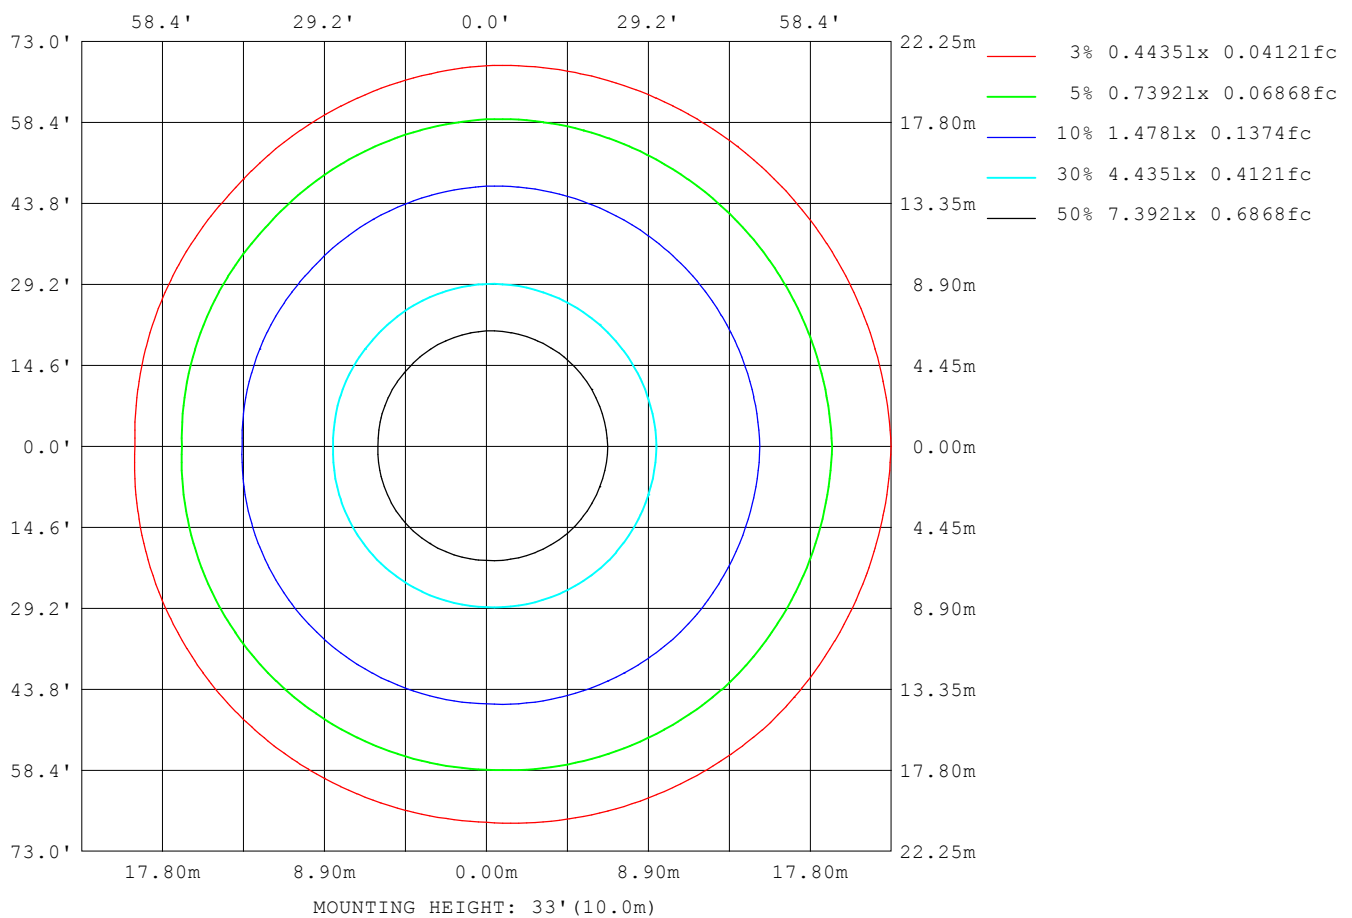

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3478
L_0~180 (75) av	2977
L_0~180 (85) av	2528
L_90~270 (65) av	3461
L_90~270 (75) av	2893
L_90~270 (85) av	1749
L_45 (65) av	3467
L_45 (75) av	2923
L_45 (85) av	1940

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

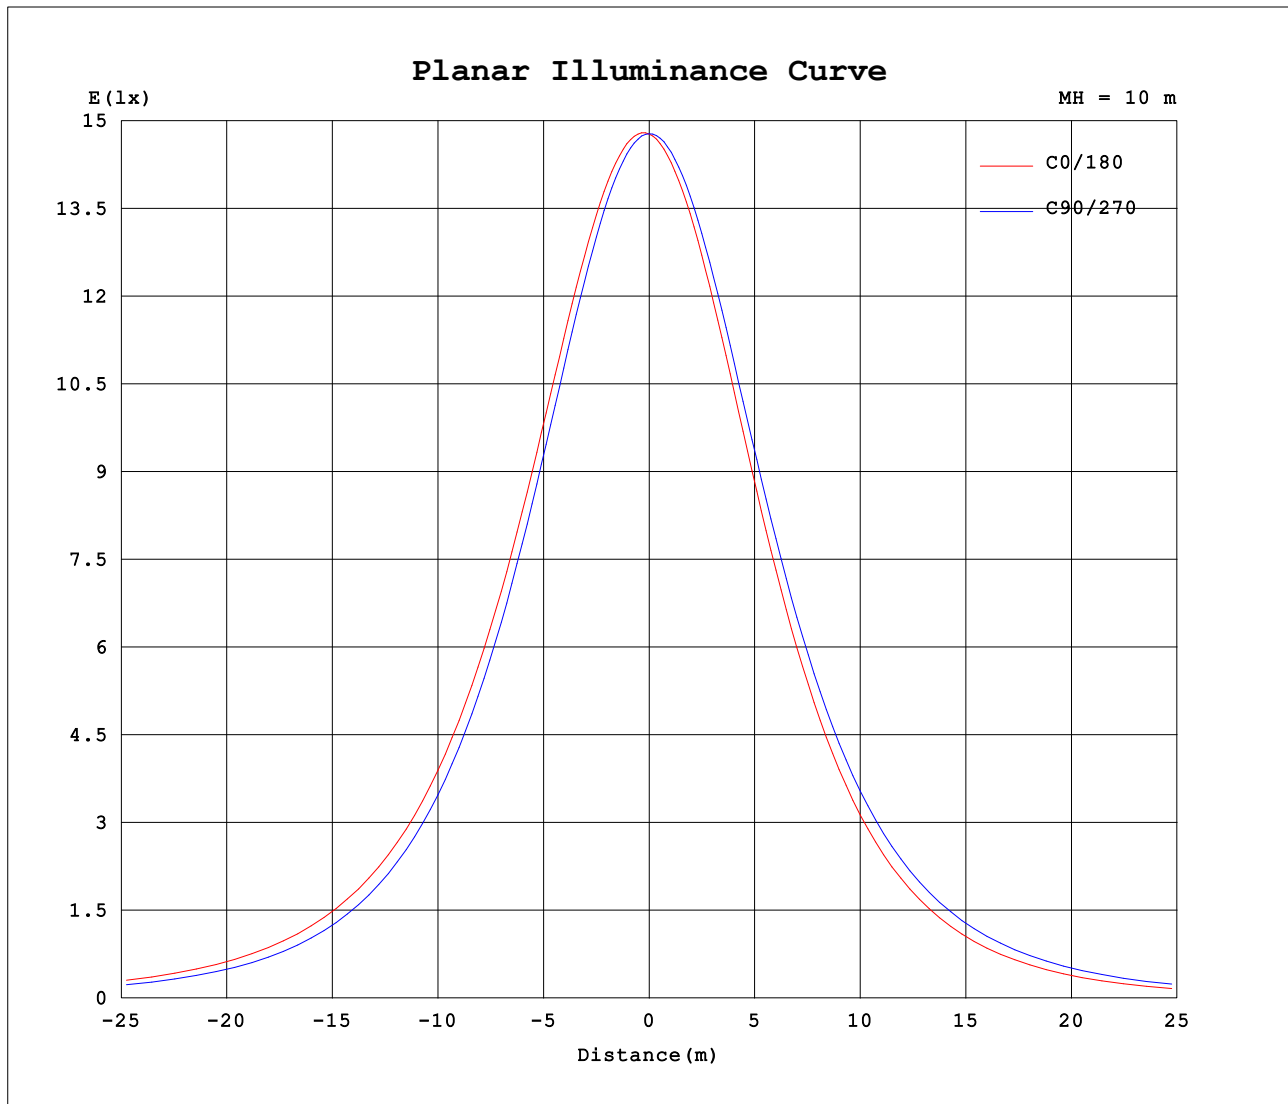

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.2400A P:28.90W PF:0.9960 Freq:60.00Hz Lamp Flux:4242.82x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1477	1476	1478	1481	1477	1476	1478	1481										
5	1485	1479	1470	1467	1457	1461	1472	1481										
10	1480	1469	1450	1441	1425	1433	1455	1469										
15	1462	1447	1418	1403	1381	1393	1424	1445										
20	1431	1412	1373	1353	1324	1341	1382	1408										
25	1388	1365	1317	1292	1257	1278	1327	1359										
30	1332	1306	1249	1219	1179	1203	1262	1299										
35	1266	1237	1169	1136	1090	1119	1185	1228										
40	1190	1157	1082	1043	993	1024	1098	1145										
45	1103	1066	984	940	887	921	1002	1053										
50	1004	966	878	829	773	809	897	952										
55	899	858	764	711	652	690	784	841										
60	785	741	642	588	526	565	665	723										
65	663	618	515	459	396	435	538	598										
70	535	489	387	330	268	305	407	468										
75	406	360	261	207	149	185	278	338										
80	278	234	144	96.2	51.5	80.2	160	213										
85	158	119	51.2	14.7	0.16	6.05	58.6	104										
90	59.7	30.1	0.18	0.21	0.22	0.20	0.15	19.4										
95	0.23	0.20	0.23	0.28	0.31	0.27	0.19	0.19										
100	0.23	0.25	0.29	0.37	0.40	0.35	0.27	0.25										
105	0.31	0.31	0.37	0.46	0.50	0.41	0.35	0.33										
110	0.41	0.40	0.46	0.56	0.61	0.53	0.45	0.40										
115	0.49	0.49	0.56	0.68	0.71	0.61	0.52	0.51										
120	0.60	0.59	0.67	0.78	0.80	0.72	0.62	0.62										
125	0.71	0.69	0.77	0.88	0.93	0.87	0.70	0.68										
130	0.81	0.78	0.87	0.98	1.02	0.99	0.80	0.81										
135	0.91	0.88	0.98	1.07	1.10	1.09	0.89	0.93										
140	1.03	0.97	1.08	1.17	1.20	1.23	0.99	1.04										
145	1.13	1.07	1.19	1.26	1.28	1.38	1.07	1.12										
150	1.23	1.19	1.30	1.36	1.37	1.49	1.17	1.14										
155	1.36	1.30	1.40	1.47	1.46	1.59	1.27	1.24										
160	1.44	1.39	1.50	1.56	1.55	1.73	1.37	1.34										
165	1.46	1.46	1.58	1.63	1.63	1.87	1.46	1.44										
170	1.50	1.51	1.62	1.66	1.65	1.87	1.79	1.48										
175	1.51	1.51	1.60	1.64	1.61	1.64	1.66	1.51										
180	1.55	1.54	1.56	1.57	1.56	1.55	1.54	1.58										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: