


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 143.40 lm/W			
MODEL		I _{max} (cd)	2216	S/MH(C0/180)	1.34
NOMINAL POWER(W)	45W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	6323.9	η UP,DN(C0-180)	0.1,52.0
NOMINAL FLUX(lm)	6323.86	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

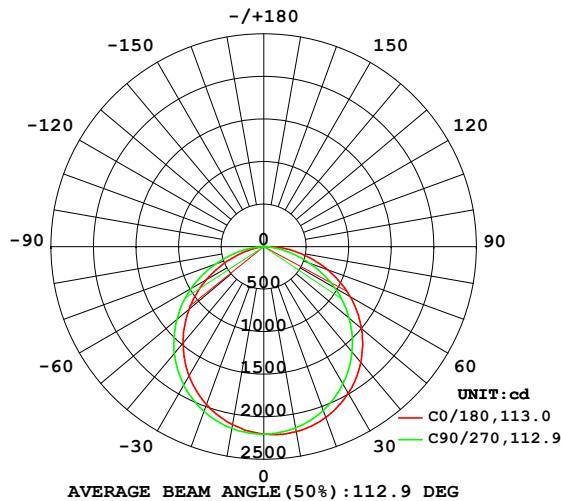

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

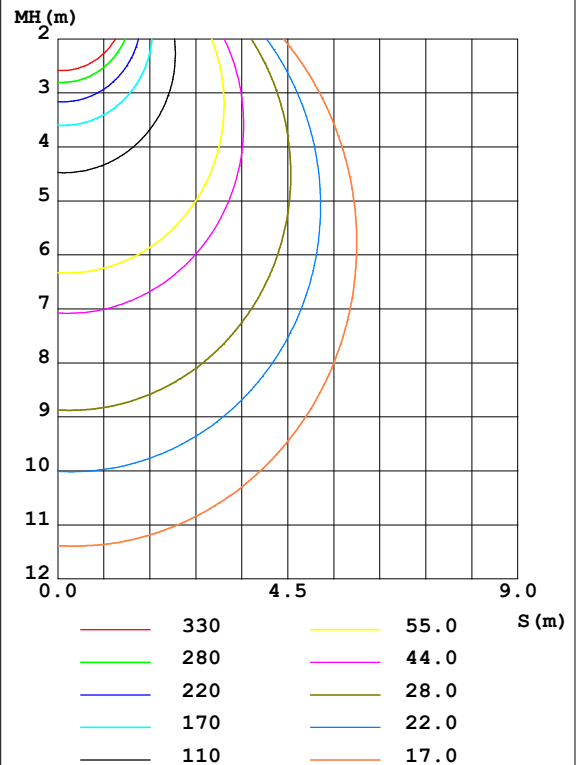

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2207	2191	2162	2148	2124	2137	2168	2192	0- 10	208.6	208.6	3.3,3.3
20	2134	2104	2049	2017	1973	2001	2059	2101	10- 20	598.4	807.0	12.8,12.8
30	1989	1947	1862	1817	1757	1797	1882	1938	20- 30	909.1	1716	27.1,27.1
40	1776	1724	1614	1549	1476	1529	1638	1710	30- 40	1099	2816	44.5,44.5
50	1500	1436	1310	1232	1148	1210	1334	1422	40- 50	1143	3958	62.6,62.6
60	1172	1101	959.2	872.8	781.0	844.5	988.2	1081	50- 60	1031	4989	78.9,78.9
70	802.3	728.6	575.2	489.8	397.2	453.0	605.5	703.6	60- 70	777.4	5767	91.2,91.2
80	413.5	348.6	214.3	144.7	75.75	119.0	237.2	317.2	70- 80	430.8	6197	98,98
90	87.05	44.73	0.2913	0.3247	0.3369	0.2977	0.2423	29.61	80- 90	116.0	6313	99.8,99.8
100	0.3437	0.3755	0.4333	0.5523	0.6130	0.5301	0.4095	0.3679	90-100	3.878	6317	99.9,99.9
110	0.6100	0.5984	0.6971	0.8406	0.9206	0.7917	0.6758	0.6148	100-110	0.6111	6318	99.9,99.9
120	0.9005	0.8866	0.9926	1.165	1.240	1.075	0.9205	0.9200	110-120	0.8523	6319	99.9,99.9
130	1.215	1.177	1.300	1.461	1.521	1.460	1.209	1.230	120-130	1.044	6320	99.9,99.9
140	1.530	1.456	1.615	1.739	1.776	1.821	1.465	1.554	130-140	1.135	6321	100,100
150	1.840	1.761	1.930	2.035	2.037	2.221	1.742	1.693	140-150	1.105	6322	100,100
160	2.150	2.083	2.242	2.328	2.325	2.569	2.047	2.003	150-160	0.9519	6323	100,100
170	2.242	2.262	2.417	2.480	2.463	2.788	2.671	2.206	160-170	0.6615	6324	100,100
180	2.310	2.298	2.306	2.344	2.308	2.306	2.310	2.339	170-180	0.2288	6324	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

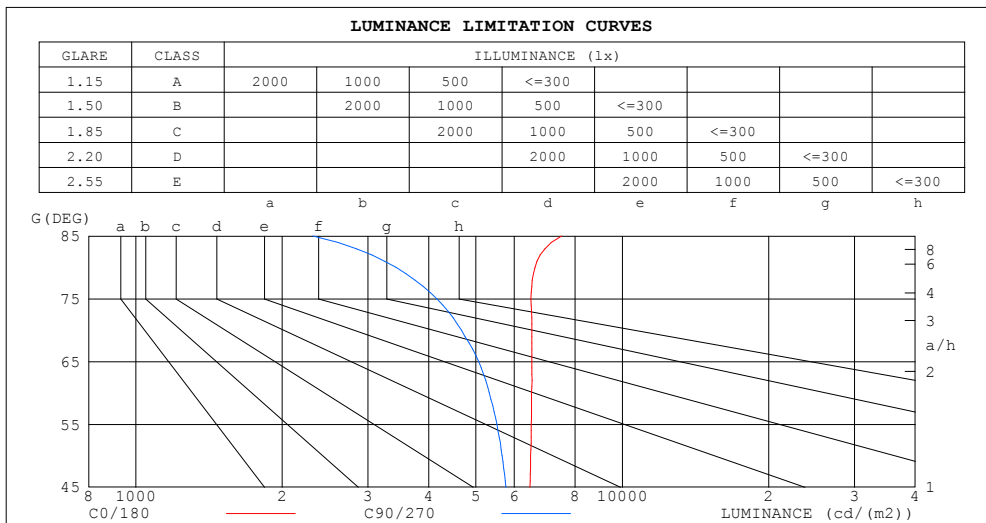


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

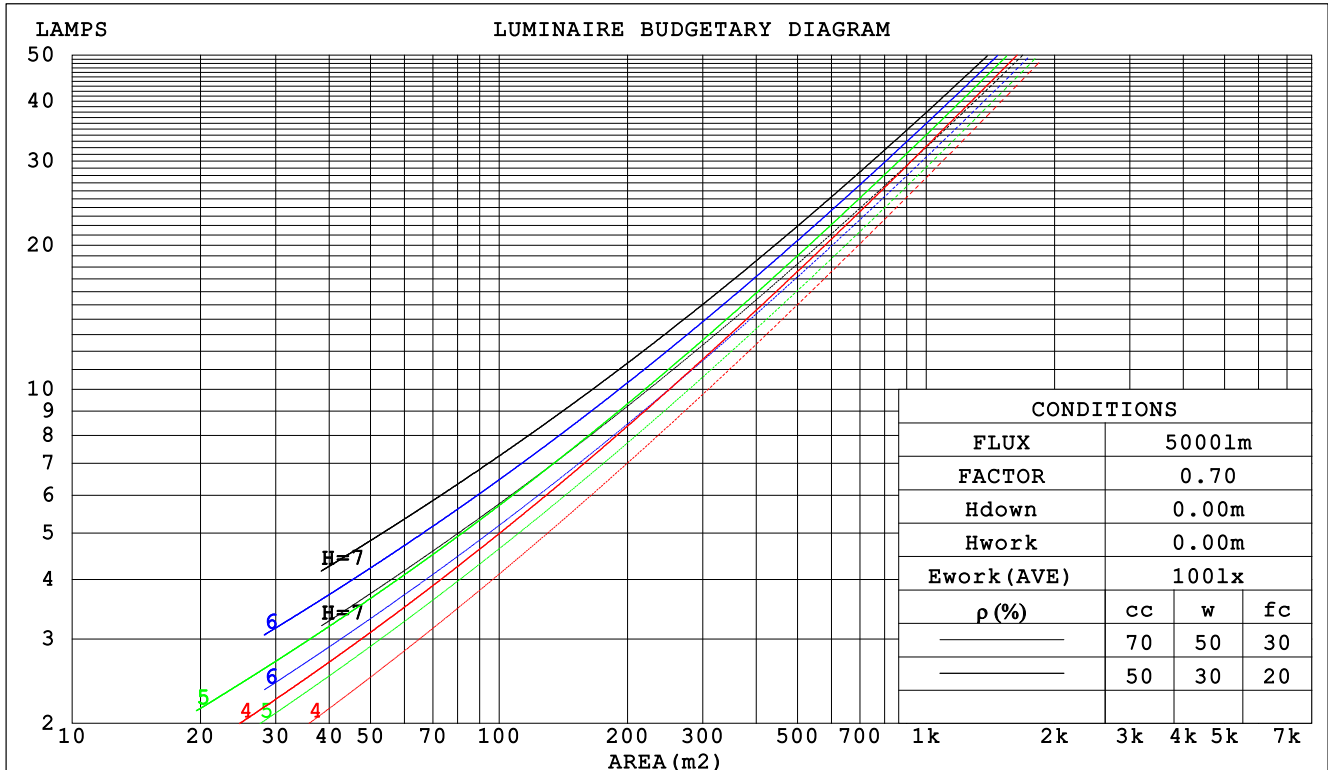

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm					
NAME: 净化灯			TYPE:3500K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.309	.175	.056	.301	.172	.055	.288	.165	.053	.276	.159	.051	.264	.153	.049		
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.142	.045		
3.0	.269	.143	.043	.264	.141	.043	.254	.137	.042	.244	.134	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.088	.052	.093	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.048	.129	.079	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.066	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.061	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.062	.024	.102	.053	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm											
NAME: 净化灯						TYPE:3500K			WEIGHT:		
SPEC.:						DIM.: 2X2			SERIAL No.:		
MFR.: WS						SUR.:0.6*0.6			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	19.8	21.3	20.1	21.5	21.8	19.1	20.6	19.4	20.8	21.1
	3H	21.6	23.0	21.9	23.3	23.5	20.6	22.0	20.9	22.2	22.5
	4H	22.4	23.8	22.7	24.0	24.3	21.1	22.4	21.4	22.7	23.0
	6H	23.1	24.4	23.4	24.6	24.9	21.4	22.7	21.8	23.0	23.3
	8H	23.4	24.6	23.7	24.9	25.2	21.5	22.7	21.9	23.0	23.3
	12H	23.6	24.8	24.0	25.1	25.4	21.6	22.7	21.9	23.0	23.3
4H	2H	20.4	21.8	20.7	22.0	22.3	19.9	21.2	20.2	21.5	21.7
	3H	22.4	23.6	22.8	23.9	24.2	21.6	22.7	21.9	23.0	23.3
	4H	23.4	24.4	23.7	24.7	25.1	22.2	23.3	22.6	23.6	24.0
	6H	24.2	25.1	24.6	25.5	25.9	22.7	23.7	23.1	24.0	24.4
	8H	24.5	25.4	24.9	25.8	26.2	22.8	23.7	23.3	24.1	24.5
	12H	24.8	25.7	25.3	26.0	26.5	22.9	23.7	23.3	24.1	24.5
8H	4H	23.6	24.5	24.0	24.9	25.3	22.7	23.5	23.1	23.9	24.3
	6H	24.6	25.4	25.1	25.8	26.2	23.3	24.0	23.8	24.4	24.9
	8H	25.1	25.7	25.6	26.2	26.6	23.5	24.2	24.0	24.6	25.1
	12H	25.5	26.1	26.0	26.5	27.0	23.7	24.2	24.2	24.7	25.2
12H	4H	23.6	24.5	24.1	24.8	25.3	22.7	23.5	23.1	23.9	24.3
	6H	24.7	25.3	25.2	25.8	26.2	23.4	24.1	23.9	24.5	25.0
	8H	25.2	25.8	25.7	26.2	26.7	23.7	24.3	24.2	24.7	25.2
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117 Corrected 6324 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

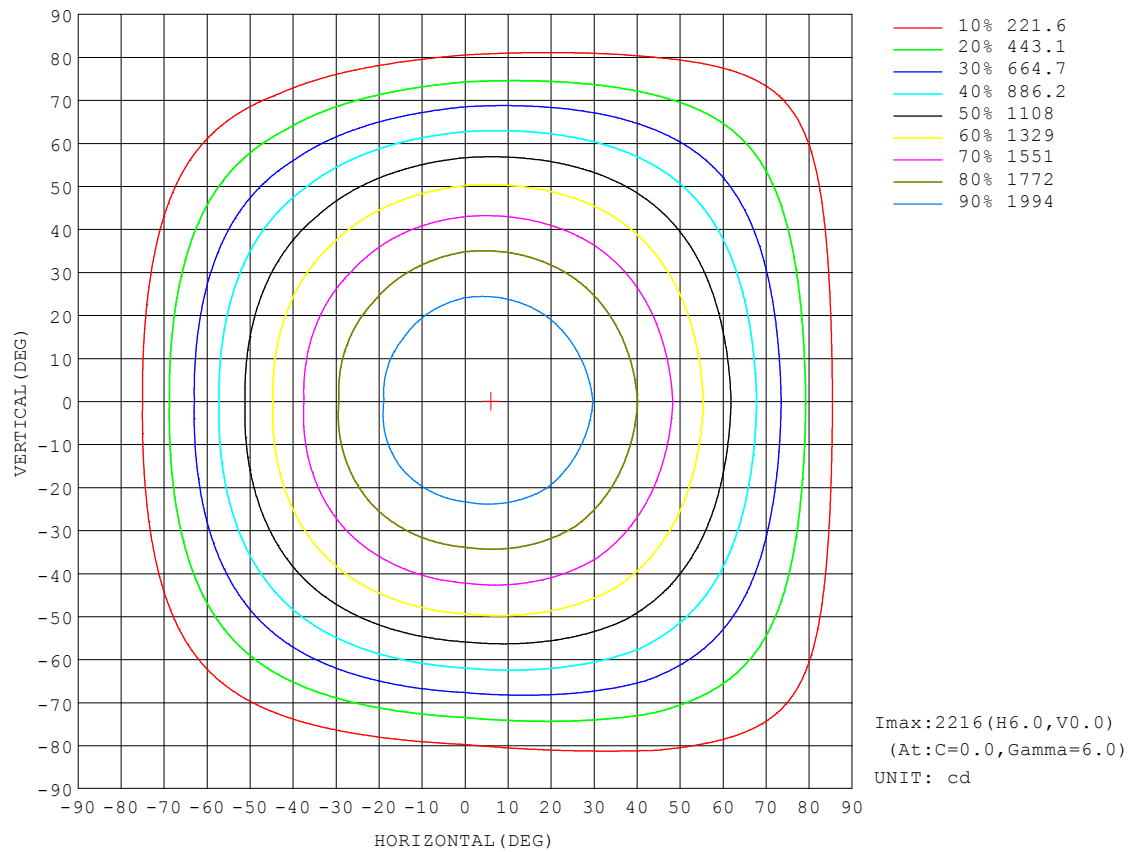


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

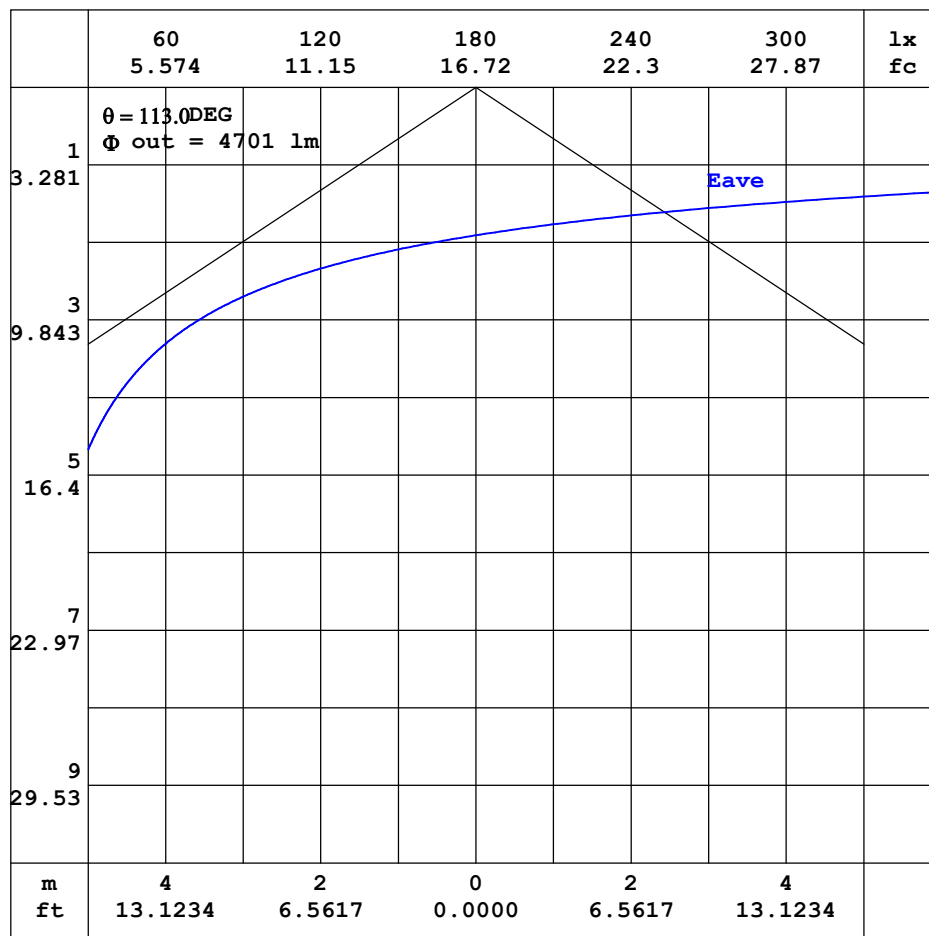


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

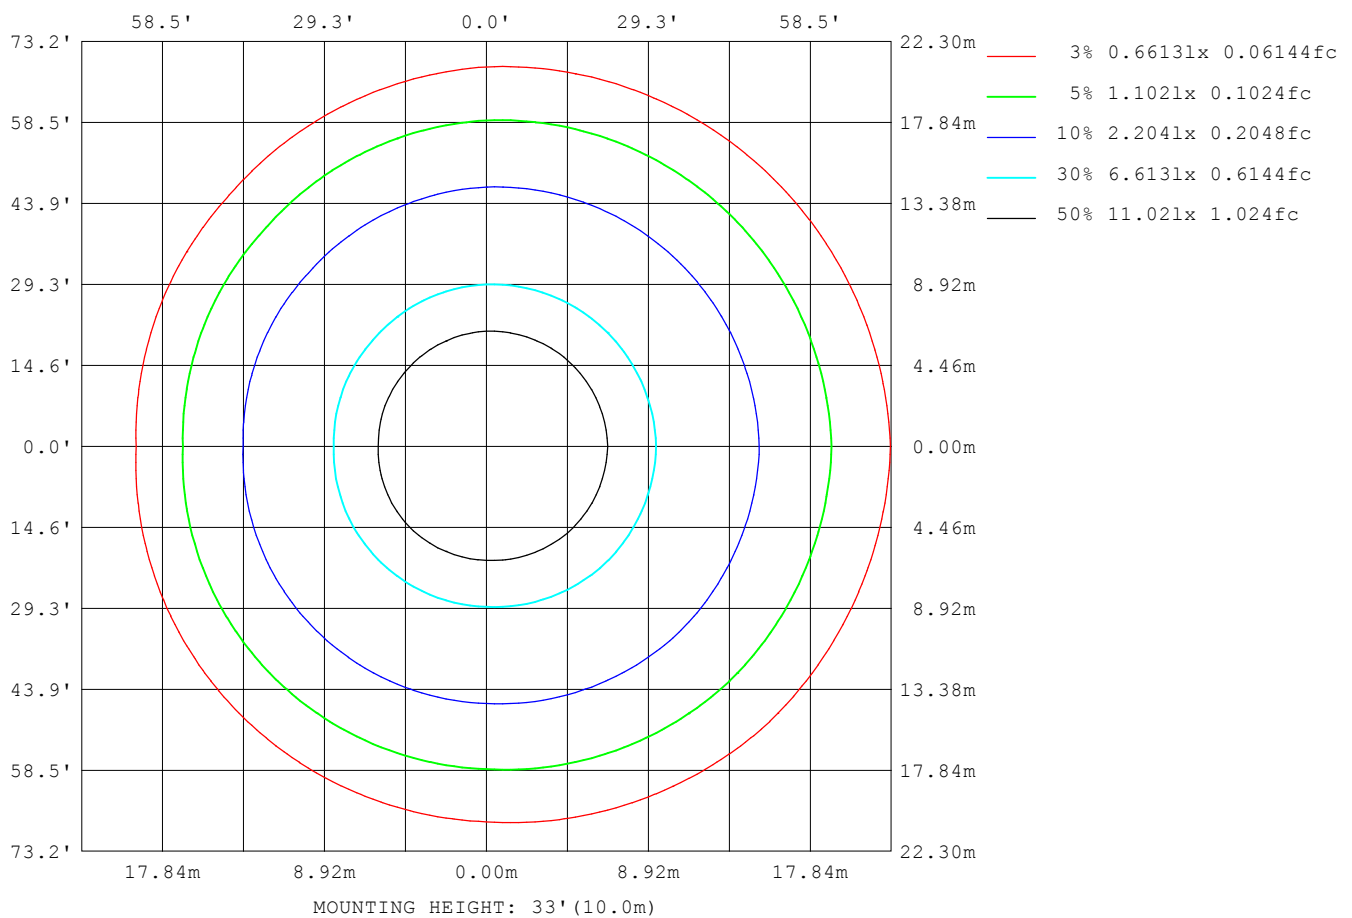

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5190
L_0~180 (75) av	4435
L_0~180 (85) av	3756
L_90~270 (65) av	5160
L_90~270 (75) av	4298
L_90~270 (85) av	2544
L_45 (65) av	5165
L_45 (75) av	4346
L_45 (85) av	2914

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

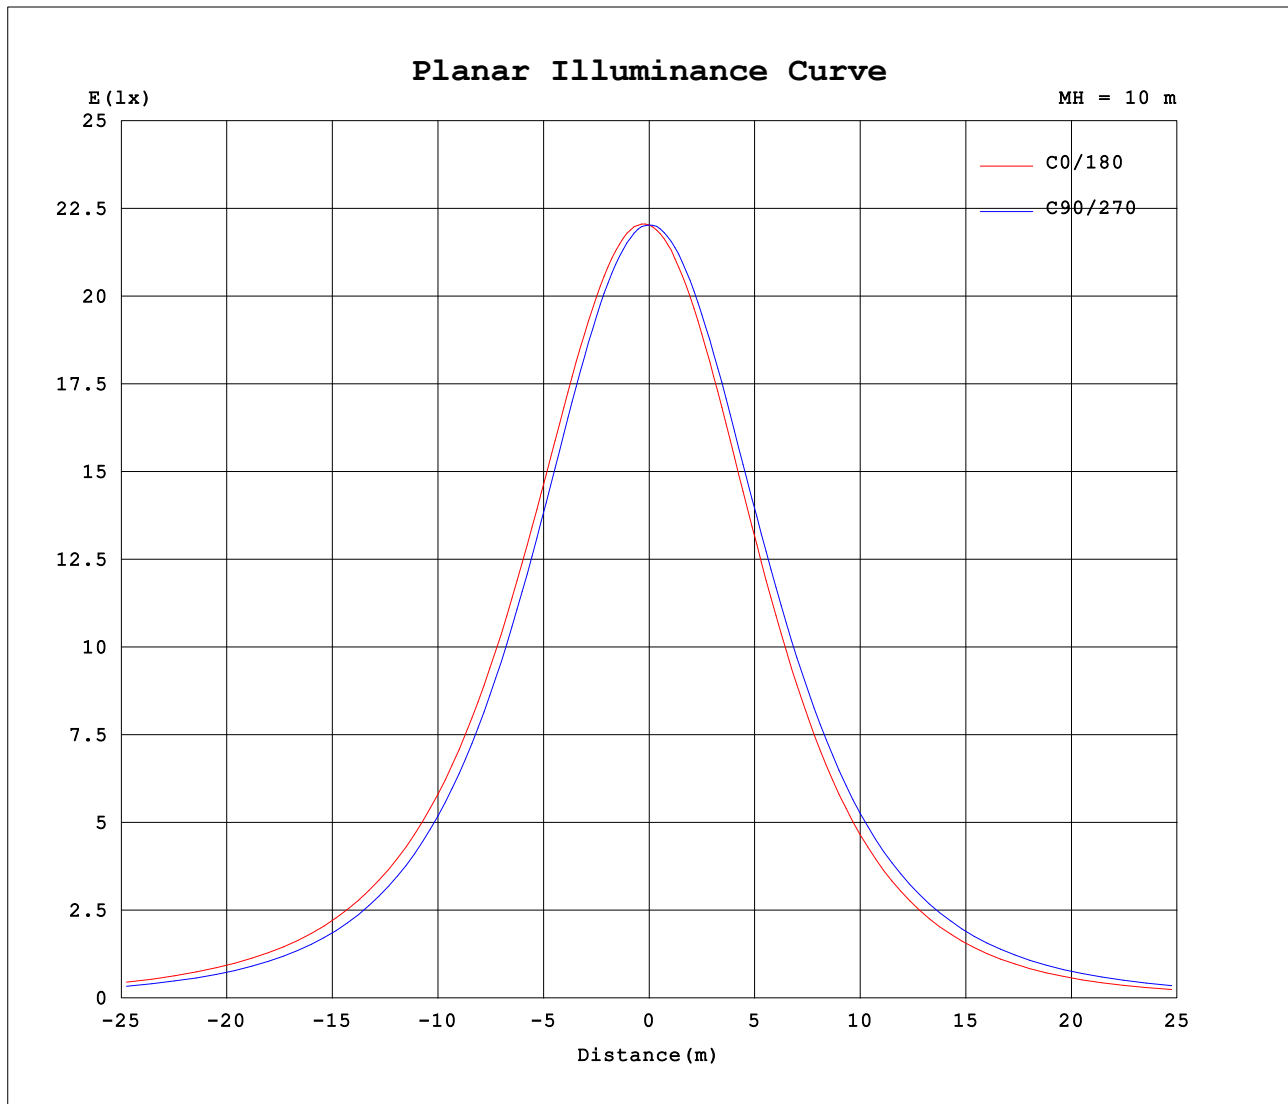

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.3650A P:44.10W PF:0.9980 Freq:60.00Hz Lamp Flux:6323.86x1 lm								
NAME: 净化灯					TYPE:3500K			WEIGHT:
SPEC.:					DIM.: 2X2			SERIAL No.:
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2203	2202	2203	2208	2203	2202	2203	2208										
5	2214	2206	2192	2187	2173	2179	2195	2210										
10	2207	2191	2162	2148	2124	2137	2168	2192										
15	2180	2157	2115	2091	2058	2078	2123	2156										
20	2134	2104	2049	2017	1973	2001	2059	2101										
25	2070	2035	1963	1925	1873	1907	1977	2029										
30	1989	1947	1862	1817	1757	1797	1882	1938										
35	1890	1844	1745	1693	1625	1670	1766	1833										
40	1776	1724	1614	1549	1476	1529	1638	1710										
45	1644	1588	1468	1398	1318	1376	1489	1573										
50	1500	1436	1310	1232	1148	1210	1334	1422										
55	1342	1276	1140	1057	968	1031	1166	1257										
60	1172	1101	959	873	781	845	988	1081										
65	991	918	771	682	588	648	800	895										
70	802	729	575	490	397	453	605	704										
75	605	536	387	306	222	275	414	503										
80	414	349	214	145	75.7	119	237	317										
85	235	181	72.5	21.5	0.26	8.98	87.1	154										
90	87.1	44.7	0.29	0.32	0.34	0.30	0.24	29.6										
95	0.36	0.30	0.34	0.44	0.47	0.40	0.30	0.29										
100	0.34	0.38	0.43	0.55	0.61	0.53	0.41	0.37										
105	0.47	0.48	0.56	0.70	0.76	0.62	0.53	0.49										
110	0.61	0.60	0.70	0.84	0.92	0.79	0.68	0.61										
115	0.74	0.74	0.84	1.01	1.07	0.90	0.78	0.77										
120	0.90	0.89	0.99	1.17	1.24	1.07	0.92	0.92										
125	1.06	1.04	1.14	1.32	1.38	1.30	1.06	1.02										
130	1.22	1.18	1.30	1.46	1.52	1.46	1.21	1.23										
135	1.37	1.32	1.45	1.60	1.64	1.64	1.34	1.38										
140	1.53	1.46	1.61	1.74	1.78	1.82	1.47	1.55										
145	1.68	1.61	1.77	1.89	1.90	2.05	1.60	1.66										
150	1.84	1.76	1.93	2.03	2.04	2.22	1.74	1.69										
155	2.02	1.94	2.10	2.19	2.18	2.36	1.90	1.85										
160	2.15	2.08	2.24	2.33	2.33	2.57	2.05	2.00										
165	2.19	2.19	2.37	2.43	2.43	2.79	2.18	2.14										
170	2.24	2.26	2.42	2.48	2.46	2.79	2.67	2.21										
175	2.25	2.25	2.38	2.45	2.39	2.45	2.48	2.25										
180	2.31	2.30	2.31	2.34	2.31	2.31	2.31	2.34										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: