


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 138.81 lm/W			
MODEL		I _{max} (cd)	2210	S/MH(C0/180)	1.34
NOMINAL POWER(W)	45W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	6302.1	η UP,DN(C0-180)	0.1,52.1
NOMINAL FLUX(lm)	6302.14	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

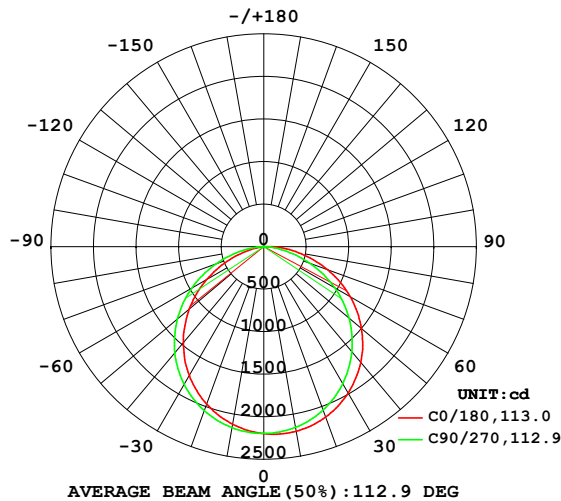

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

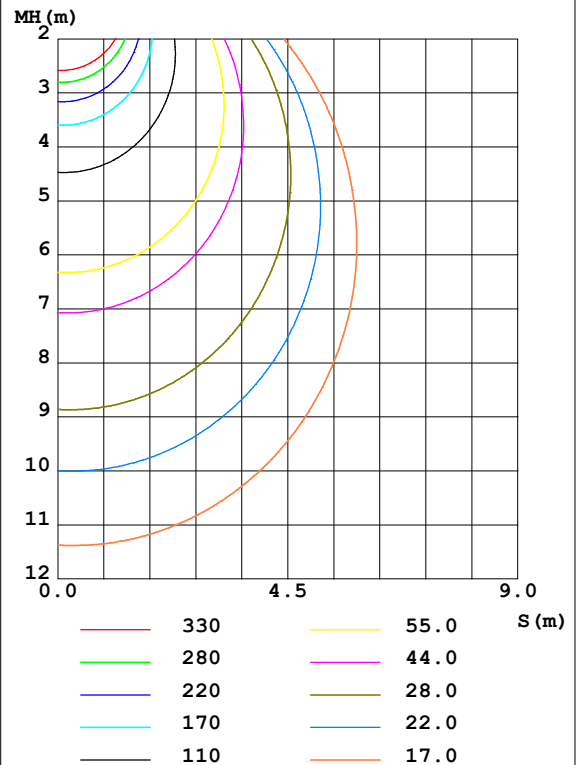

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2203	2183	2156	2139	2119	2130	2160	2182	0- 10	207.9	207.9	3.3,3.3
20	2131	2099	2042	2007	1968	1993	2052	2092	10- 20	596.3	804.2	12.8,12.8
30	1985	1942	1858	1808	1751	1789	1872	1930	20- 30	905.9	1710	27.1,27.1
40	1775	1720	1611	1542	1471	1522	1629	1701	30- 40	1096	2806	44.5,44.5
50	1498	1433	1310	1228	1144	1203	1325	1414	40- 50	1139	3944	62.6,62.6
60	1174	1100	960.9	868.1	777.4	840.2	980.2	1075	50- 60	1028	4972	78.9,78.9
70	801.6	728.5	577.2	488.1	394.1	450.7	598.8	694.0	60- 70	774.5	5747	91.2,91.2
80	414.6	349.3	217.4	144.7	75.24	117.1	231.9	313.6	70- 80	429.1	6176	98,98
90	88.75	45.92	0.2933	0.3295	0.3393	0.2929	0.2423	28.80	80- 90	115.8	6292	99.8,99.8
100	0.3533	0.3755	0.4309	0.5476	0.6083	0.5277	0.4023	0.3703	90-100	3.965	6296	99.9,99.9
110	0.6124	0.6105	0.6971	0.8454	0.9133	0.7796	0.6638	0.6173	100-110	0.6109	6296	99.9,99.9
120	0.9030	0.8866	0.9902	1.158	1.226	1.070	0.9254	0.9151	110-120	0.8501	6297	99.9,99.9
130	1.218	1.177	1.290	1.461	1.524	1.460	1.206	1.215	120-130	1.042	6298	99.9,99.9
140	1.523	1.456	1.605	1.737	1.771	1.809	1.468	1.535	130-140	1.131	6299	100,100
150	1.838	1.763	1.930	2.023	2.044	2.191	1.746	1.683	140-150	1.102	6300	100,100
160	2.150	2.083	2.240	2.323	2.318	2.552	2.057	2.000	150-160	0.9492	6301	100,100
170	2.245	2.267	2.414	2.468	2.468	2.739	2.657	2.216	160-170	0.6597	6302	100,100
180	2.308	2.301	2.306	2.339	2.330	2.303	2.308	2.330	170-180	0.2279	6302	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

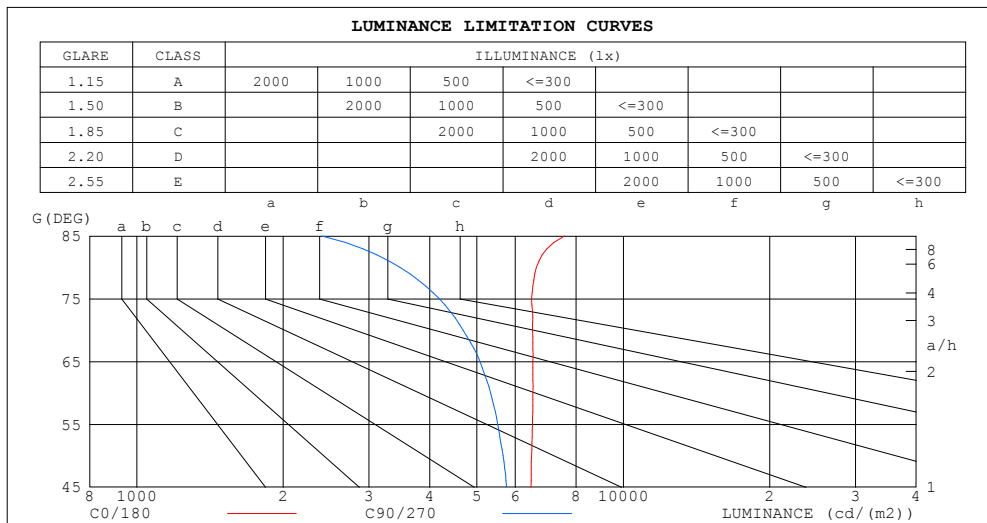


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

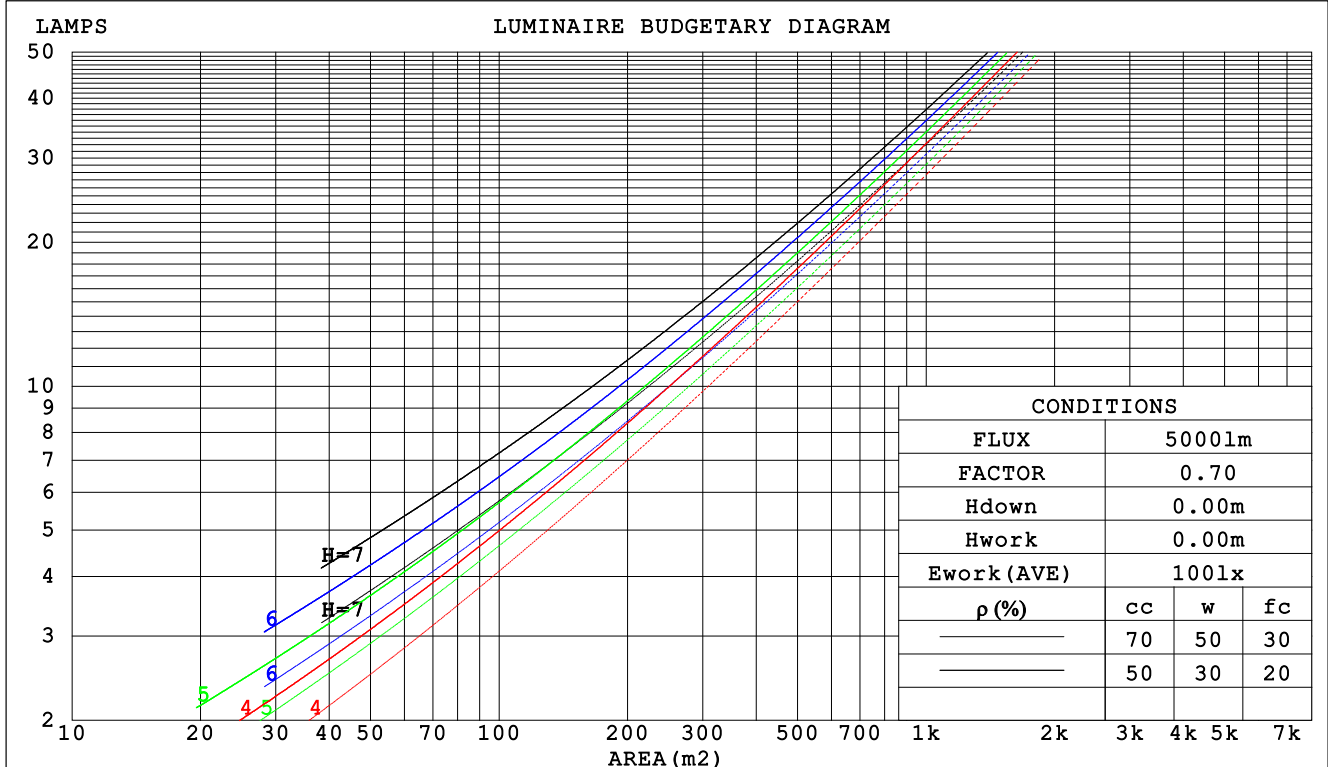

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm					
NAME: 净化灯			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.309	.175	.056	.301	.172	.055	.288	.165	.053	.276	.159	.051	.264	.153	.049		
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.142	.045		
3.0	.269	.143	.043	.264	.141	.043	.254	.137	.042	.244	.134	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.088	.052	.093	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.129	.079	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.066	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.061	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm											
NAME: 净化灯						TYPE:4000K			WEIGHT:		
SPEC.:						DIM.: 2X2			SERIAL No.:		
MFR.: WS						SUR.:0.6*0.6			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	19.8	21.3	20.1	21.6	21.8	19.1	20.6	19.4	20.8	21.1
	3H	21.6	23.0	21.9	23.3	23.5	20.6	22.0	20.9	22.2	22.5
	4H	22.4	23.8	22.7	24.0	24.3	21.1	22.5	21.4	22.7	23.0
	6H	23.1	24.4	23.4	24.6	24.9	21.5	22.7	21.8	23.0	23.3
	8H	23.4	24.6	23.7	24.9	25.2	21.6	22.8	21.9	23.1	23.4
	12H	23.6	24.8	24.0	25.1	25.4	21.6	22.8	21.9	23.1	23.4
4H	2H	20.4	21.8	20.8	22.0	22.3	19.9	21.2	20.2	21.5	21.8
	3H	22.4	23.6	22.8	23.9	24.2	21.6	22.7	21.9	23.0	23.3
	4H	23.4	24.4	23.7	24.8	25.1	22.3	23.3	22.6	23.6	24.0
	6H	24.2	25.1	24.6	25.5	25.9	22.7	23.7	23.1	24.0	24.4
	8H	24.5	25.4	25.0	25.8	26.2	22.9	23.8	23.3	24.1	24.5
	12H	24.9	25.7	25.3	26.1	26.5	22.9	23.7	23.4	24.1	24.5
8H	4H	23.6	24.5	24.1	24.9	25.3	22.7	23.6	23.1	23.9	24.3
	6H	24.6	25.4	25.1	25.8	26.2	23.3	24.1	23.8	24.5	24.9
	8H	25.1	25.8	25.6	26.2	26.6	23.6	24.2	24.0	24.6	25.1
	12H	25.6	26.1	26.0	26.6	27.0	23.7	24.3	24.2	24.7	25.2
12H	4H	23.7	24.5	24.1	24.9	25.3	22.7	23.5	23.2	23.9	24.3
	6H	24.7	25.4	25.2	25.8	26.2	23.5	24.1	23.9	24.5	25.0
	8H	25.2	25.8	25.7	26.2	26.7	23.8	24.3	24.2	24.8	25.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117 Corrected 6302 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

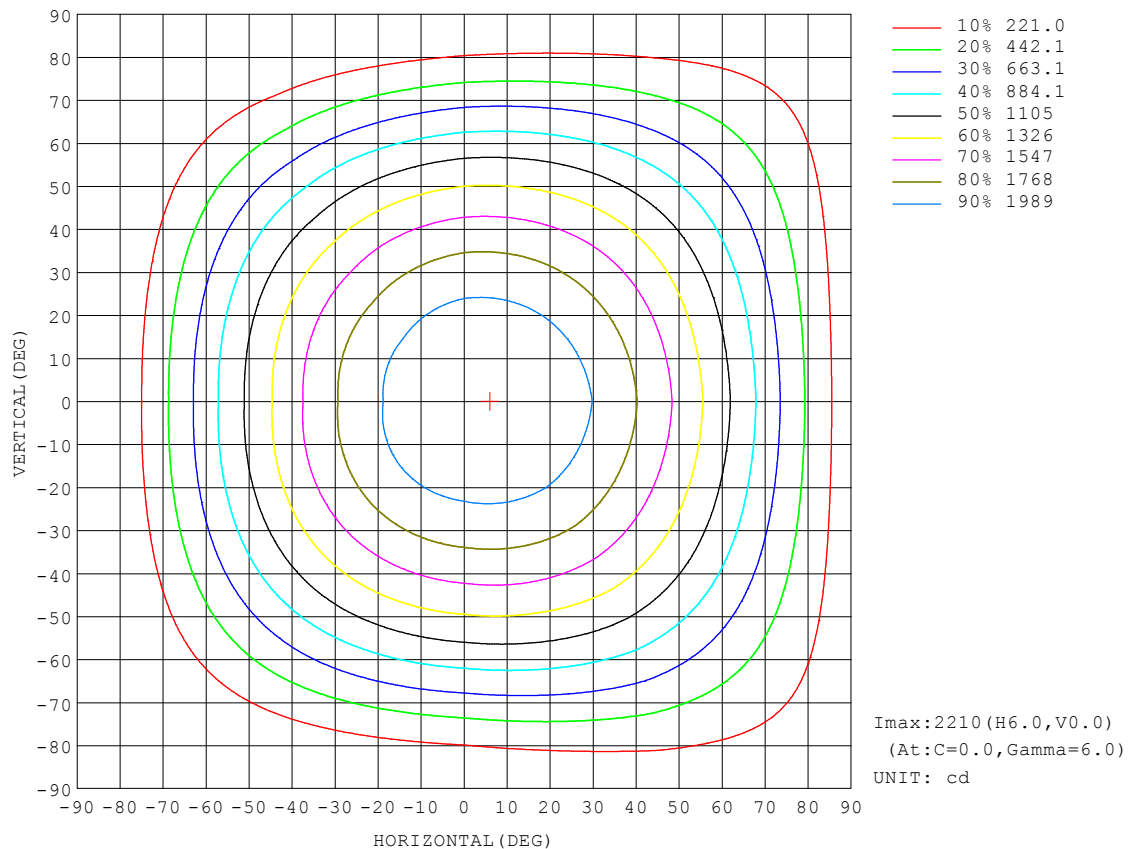


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

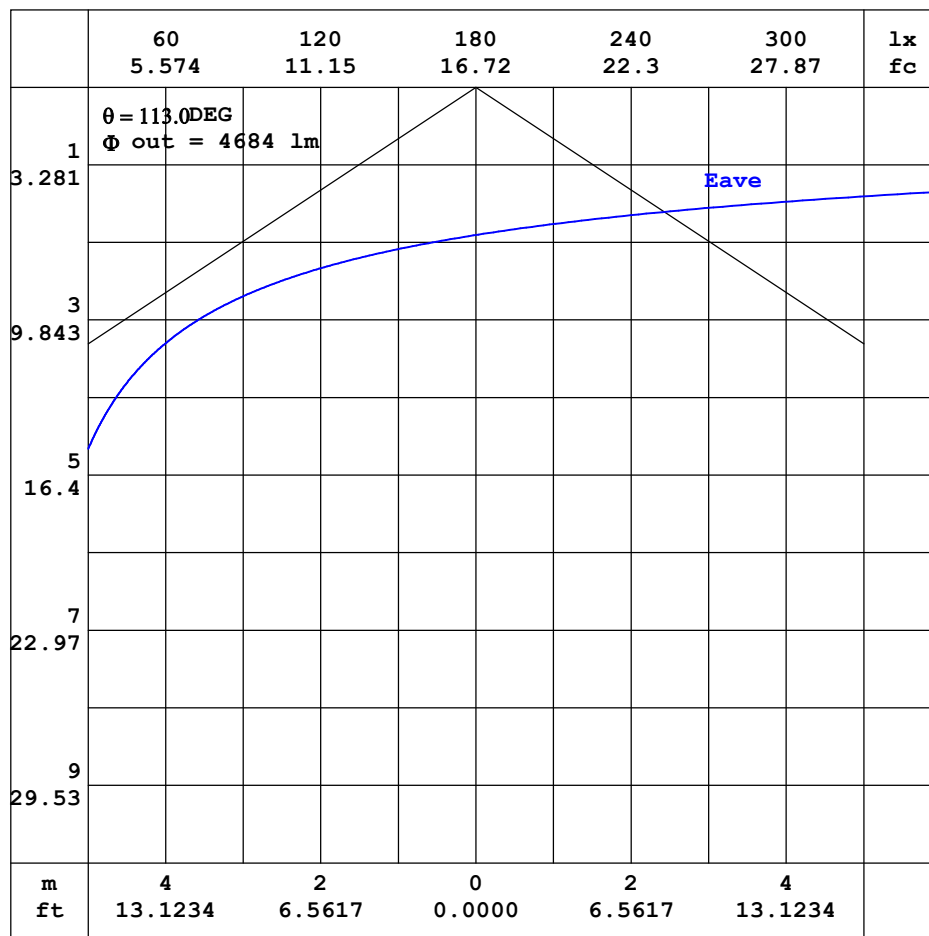


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

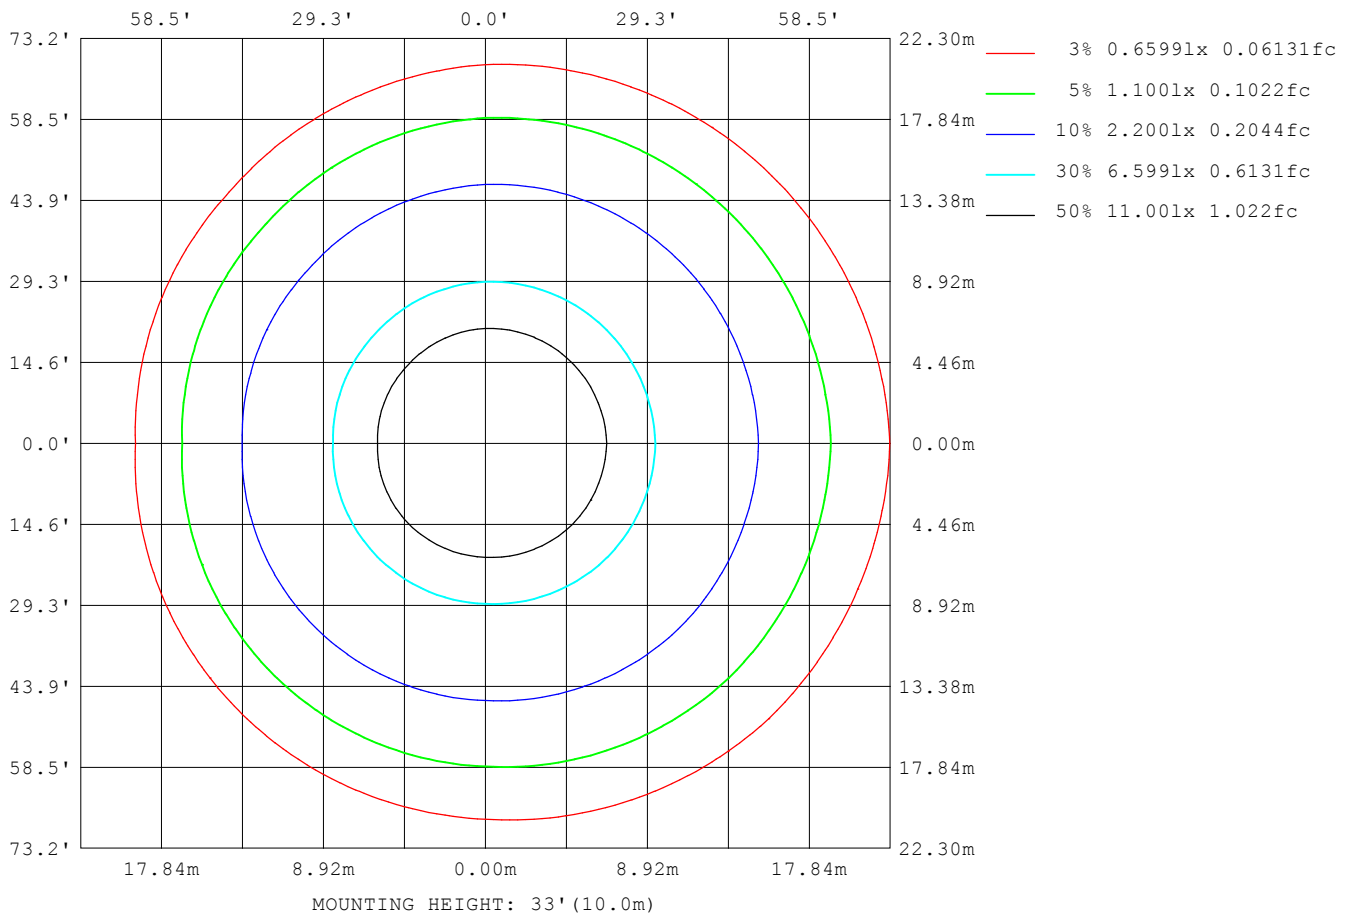

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5180
L_0~180 (75) av	4420
L_0~180 (85) av	3791
L_90~270 (65) av	5142
L_90~270 (75) av	4284
L_90~270 (85) av	2534
L_45 (65) av	5142
L_45 (75) av	4326
L_45 (85) av	2902

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

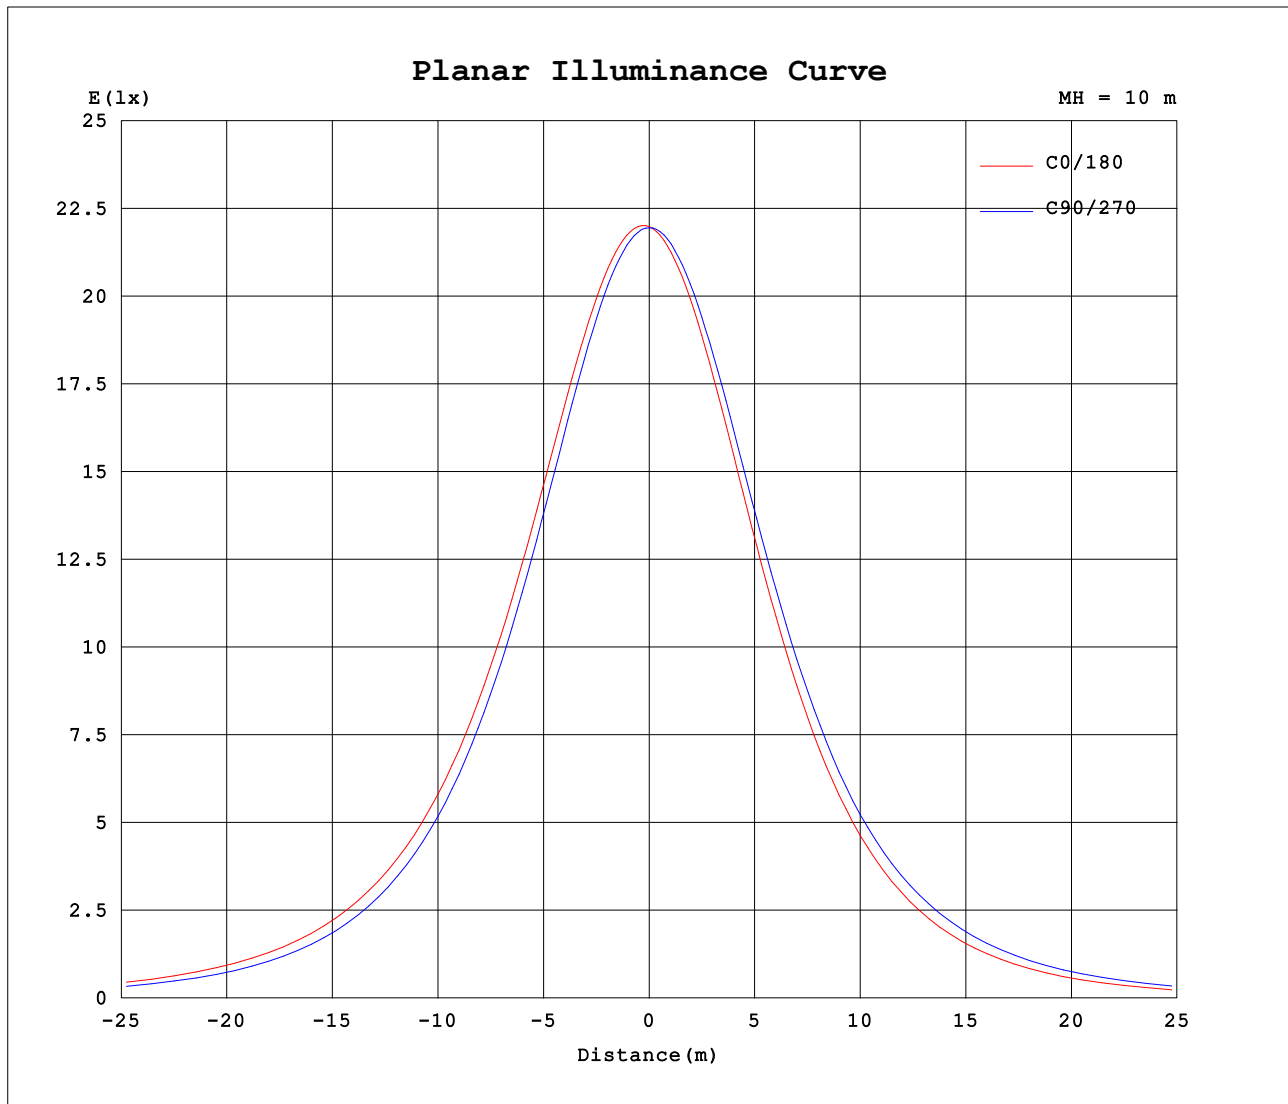

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.3770A P:45.40W PF:0.9970 Freq:60.00Hz Lamp Flux:6302.14x1 lm								
NAME: 净化灯					TYPE:4000K			WEIGHT:
SPEC.:					DIM.: 2X2			SERIAL No.:
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2199	2194	2195	2198	2199	2194	2195	2198										
5	2210	2198	2185	2178	2168	2171	2188	2200										
10	2203	2183	2156	2139	2119	2130	2160	2182										
15	2177	2150	2109	2082	2053	2071	2114	2146										
20	2131	2099	2042	2007	1968	1993	2052	2092										
25	2067	2029	1958	1915	1868	1899	1969	2020										
30	1985	1942	1858	1808	1751	1789	1872	1930										
35	1888	1839	1742	1684	1621	1664	1757	1823										
40	1775	1720	1611	1542	1471	1522	1629	1701										
45	1645	1584	1466	1391	1313	1369	1480	1564										
50	1498	1433	1310	1228	1144	1203	1325	1414										
55	1343	1273	1140	1053	964	1025	1158	1250										
60	1174	1100	961	868	777	840	980	1075										
65	992	917	772	679	584	644	792	890										
70	802	728	577	488	394	451	599	694										
75	604	535	390	305	220	272	408	500										
80	415	349	217	145	75.2	117	232	314										
85	238	182	75.4	21.9	0.26	8.42	83.6	152										
90	88.7	45.9	0.29	0.33	0.34	0.29	0.24	28.8										
95	0.39	0.30	0.35	0.42	0.47	0.39	0.31	0.28										
100	0.35	0.38	0.43	0.55	0.61	0.53	0.40	0.37										
105	0.47	0.47	0.56	0.68	0.77	0.62	0.53	0.48										
110	0.61	0.61	0.70	0.85	0.91	0.78	0.66	0.62										
115	0.74	0.74	0.84	1.01	1.08	0.90	0.78	0.77										
120	0.90	0.89	0.99	1.16	1.23	1.07	0.93	0.92										
125	1.06	1.04	1.14	1.31	1.38	1.30	1.07	1.01										
130	1.22	1.18	1.29	1.46	1.52	1.46	1.21	1.22										
135	1.37	1.31	1.45	1.60	1.65	1.62	1.33	1.38										
140	1.52	1.46	1.61	1.74	1.77	1.81	1.47	1.54										
145	1.68	1.60	1.77	1.88	1.91	2.02	1.61	1.65										
150	1.84	1.76	1.93	2.02	2.04	2.19	1.75	1.68										
155	2.01	1.95	2.09	2.18	2.18	2.33	1.90	1.85										
160	2.15	2.08	2.24	2.32	2.32	2.55	2.06	2.00										
165	2.18	2.19	2.36	2.42	2.43	2.76	2.19	2.14										
170	2.24	2.27	2.41	2.47	2.47	2.74	2.66	2.22										
175	2.25	2.26	2.37	2.43	2.40	2.43	2.44	2.25										
180	2.31	2.30	2.31	2.34	2.33	2.30	2.31	2.33										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: