


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.10 lm/W			
MODEL		I _{max} (cd)	2710	S/MH(C0/180)	1.34
NOMINAL POWER(W)	60W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7732.9	η UP,DN(C0-180)	0.1,51.9
NOMINAL FLUX(lm)	7732.91	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

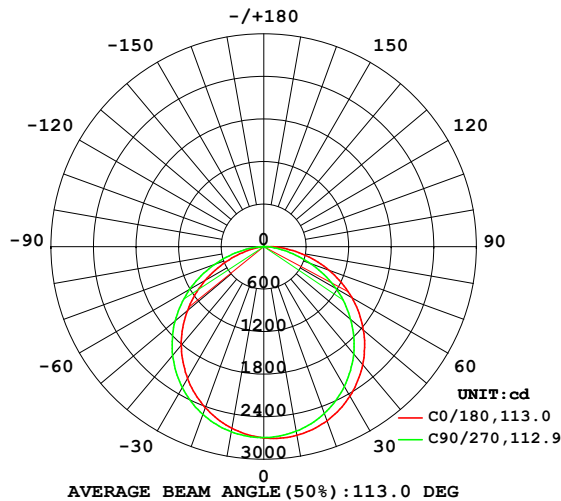

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

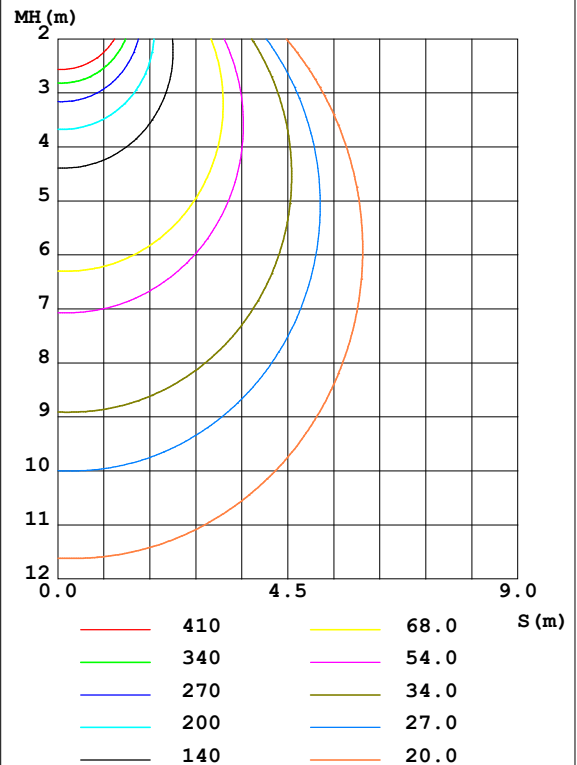

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2702	2678	2643	2624	2599	2613	2650	2678	0- 10	255.0	255.0	3.3,3.3
20	2612	2574	2503	2462	2416	2446	2517	2567	10- 20	731.4	986.4	12.8,12.8
30	2433	2381	2275	2216	2150	2195	2298	2369	20- 30	1111	2098	27.1,27.1
40	2172	2107	1974	1895	1811	1869	2001	2087	30- 40	1344	3442	44.5,44.5
50	1837	1760	1601	1504	1405	1479	1635	1737	40- 50	1398	4839	62.6,62.6
60	1434	1347	1173	1063	956.0	1032	1209	1321	50- 60	1261	6100	78.9,78.9
70	981.8	889.0	702.0	595.1	485.7	555.4	741.1	857.8	60- 70	950.5	7051	91.2,91.2
80	506.3	424.9	261.7	176.2	92.26	146.1	291.4	389.4	70- 80	527.3	7578	98,98
90	106.9	54.30	0.3471	0.3997	0.4096	0.3679	0.2955	39.63	80- 90	142.1	7720	99.8,99.8
100	0.4357	0.4555	0.5301	0.6711	0.7463	0.6535	0.4895	0.4550	90-100	4.714	7725	99.9,99.9
110	0.7576	0.7340	0.8544	1.037	1.126	0.9490	0.8140	0.7553	100-110	0.7477	7726	99.9,99.9
120	1.106	1.083	1.218	1.429	1.511	1.300	1.112	1.126	110-120	1.042	7727	99.9,99.9
130	1.491	1.432	1.579	1.788	1.863	1.792	1.470	1.501	120-130	1.277	7728	99.9,99.9
140	1.874	1.783	1.971	2.139	2.182	2.252	1.790	1.893	130-140	1.389	7729	100,100
150	2.271	2.151	2.363	2.490	2.497	2.739	2.120	2.068	140-150	1.355	7731	100,100
160	2.640	2.533	2.736	2.860	2.851	3.165	2.505	2.455	150-160	1.166	7732	100,100
170	2.739	2.756	2.957	3.044	3.017	3.476	3.304	2.707	160-170	0.8102	7733	100,100
180	2.829	2.817	2.831	2.875	2.838	2.824	2.831	2.870	170-180	0.2807	7733	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

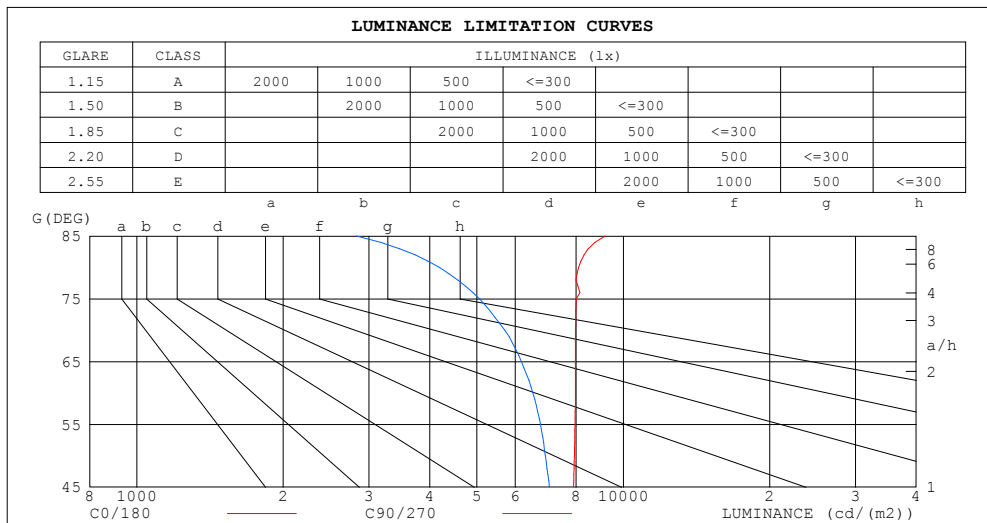

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9174	2830
80	8098	4187
75	8009	5058
70	7974	5701
65	7974	6174
60	7969	6518
55	7956	6756
50	7938	6918
45	7905	7054


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

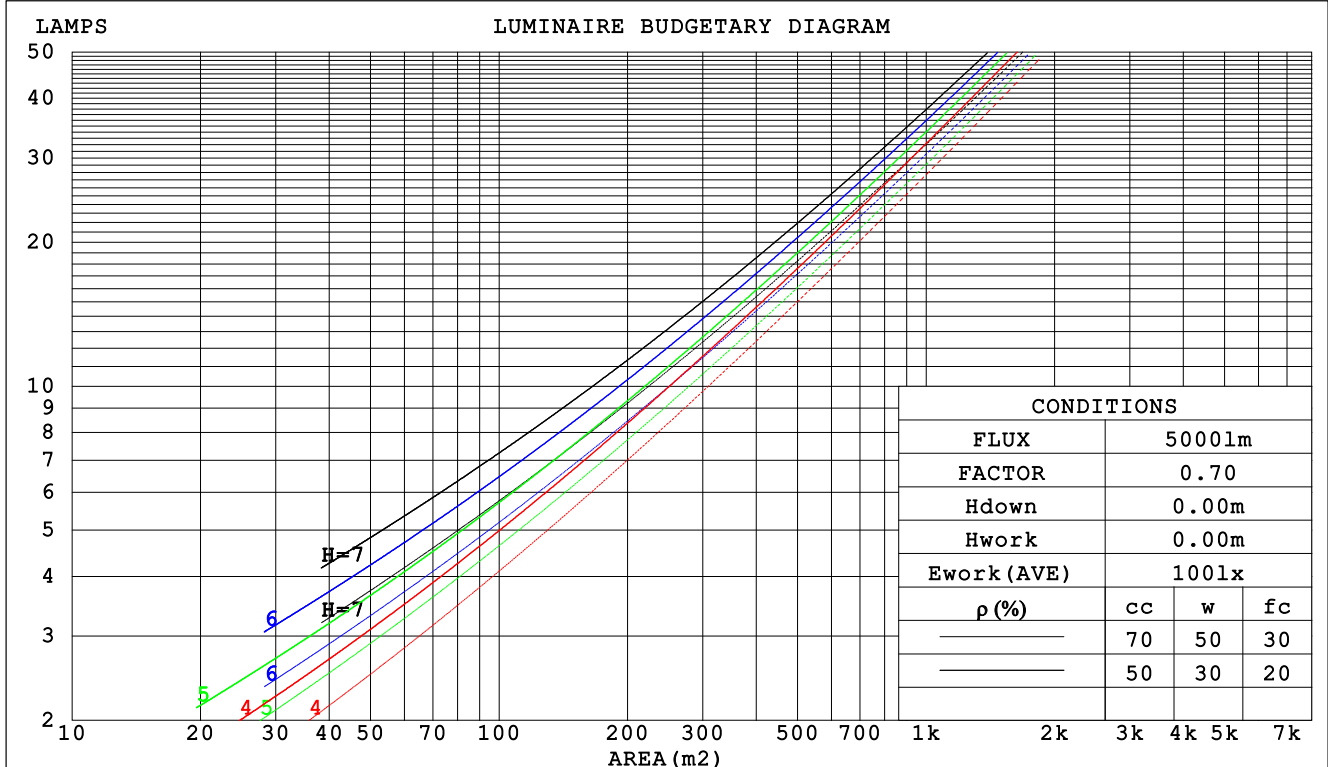

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm					
NAME: 净化灯			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.309	.175	.056	.301	.172	.055	.288	.165	.053	.276	.159	.051	.265	.153	.049		
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045		
3.0	.270	.143	.043	.264	.141	.043	.254	.137	.042	.244	.134	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.181	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.088	.052	.093	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.048	.129	.079	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.066	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.061	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.062	.024	.102	.053	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm											
NAME: 净化灯					TYPE:3000K			WEIGHT:			
SPEC.:					DIM.: 2X2			SERIAL No.:			
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	20.5	22.0	20.8	22.2	22.5	19.8	21.3	20.1	21.5	21.8
	3H	22.3	23.7	22.6	24.0	24.2	21.3	22.7	21.6	22.9	23.1
	4H	23.1	24.5	23.5	24.7	25.0	21.8	23.1	22.1	23.4	23.6
	6H	23.8	25.1	24.1	25.3	25.6	22.1	23.4	22.5	23.7	24.0
	8H	24.1	25.3	24.4	25.6	25.9	22.2	23.4	22.6	23.7	24.0
	12H	24.3	25.5	24.7	25.8	26.1	22.2	23.4	22.6	23.7	24.0
4H	2H	21.1	22.5	21.4	22.7	23.0	20.6	21.9	20.9	22.2	22.4
	3H	23.1	24.3	23.5	24.6	24.9	22.2	23.4	22.6	23.7	24.0
	4H	24.1	25.1	24.4	25.5	25.8	22.9	24.0	23.3	24.3	24.6
	6H	24.9	25.8	25.3	26.2	26.6	23.4	24.3	23.8	24.7	25.1
	8H	25.2	26.1	25.7	26.5	26.9	23.5	24.4	23.9	24.8	25.2
	12H	25.6	26.4	26.0	26.8	27.2	23.6	24.4	24.0	24.8	25.2
8H	4H	24.3	25.2	24.8	25.6	26.0	23.3	24.2	23.8	24.6	25.0
	6H	25.3	26.1	25.8	26.5	26.9	24.0	24.7	24.4	25.1	25.6
	8H	25.8	26.5	26.3	26.9	27.3	24.2	24.9	24.7	25.3	25.8
	12H	26.2	26.8	26.7	27.3	27.7	24.4	24.9	24.8	25.4	25.9
12H	4H	24.4	25.2	24.8	25.6	26.0	23.4	24.2	23.8	24.6	25.0
	6H	25.4	26.1	25.9	26.5	26.9	24.1	24.8	24.6	25.2	25.7
	8H	25.9	26.5	26.4	26.9	27.4	24.4	25.0	24.9	25.4	25.9
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 7733 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.1)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

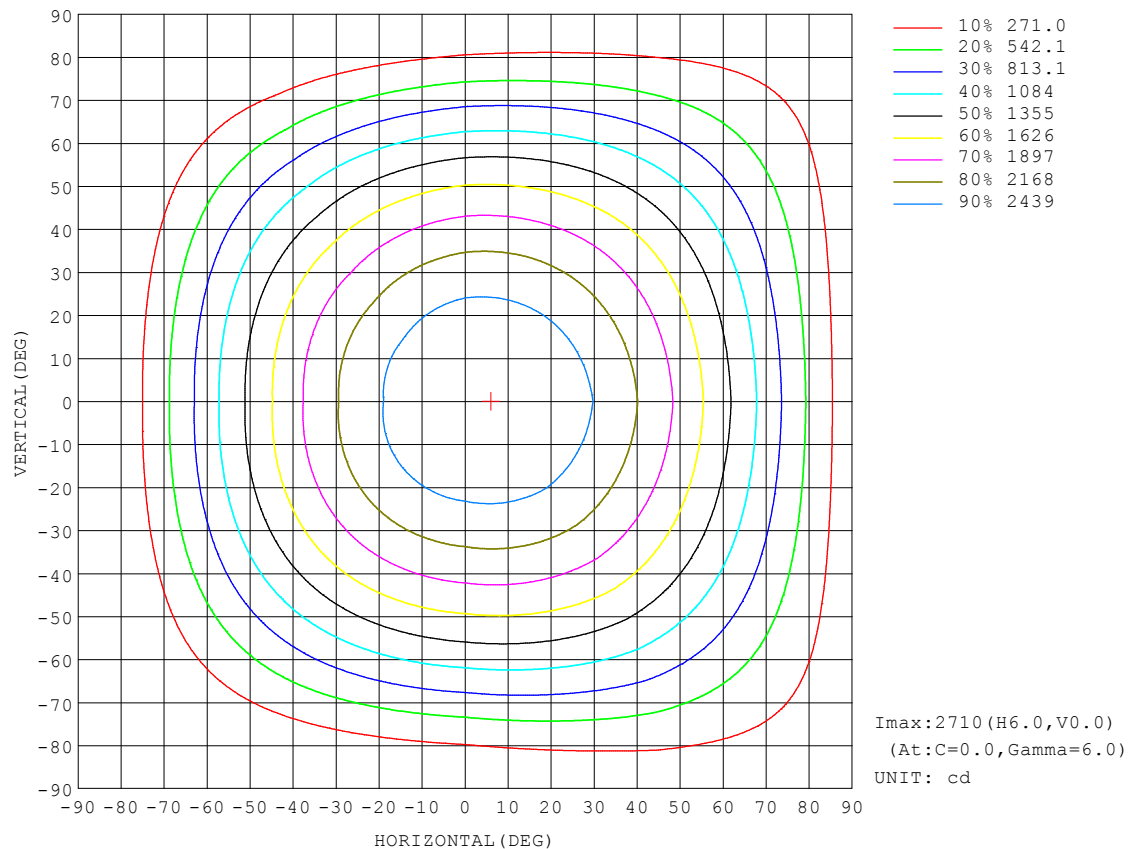


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

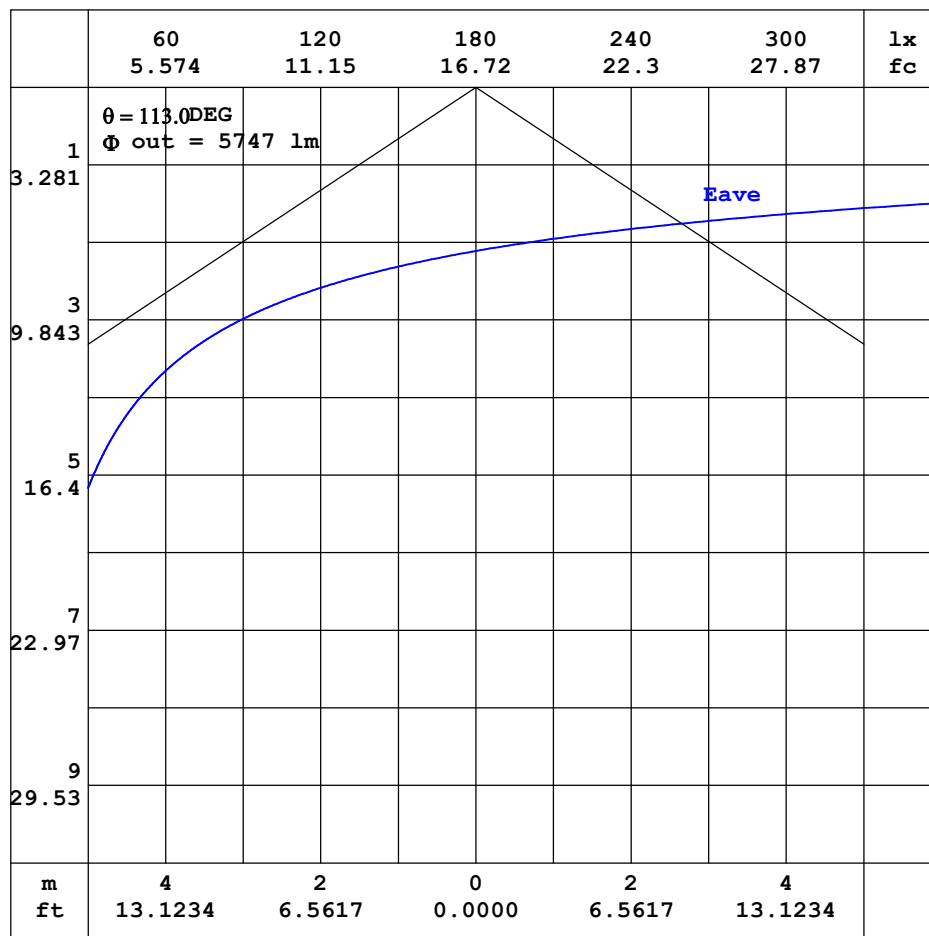


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

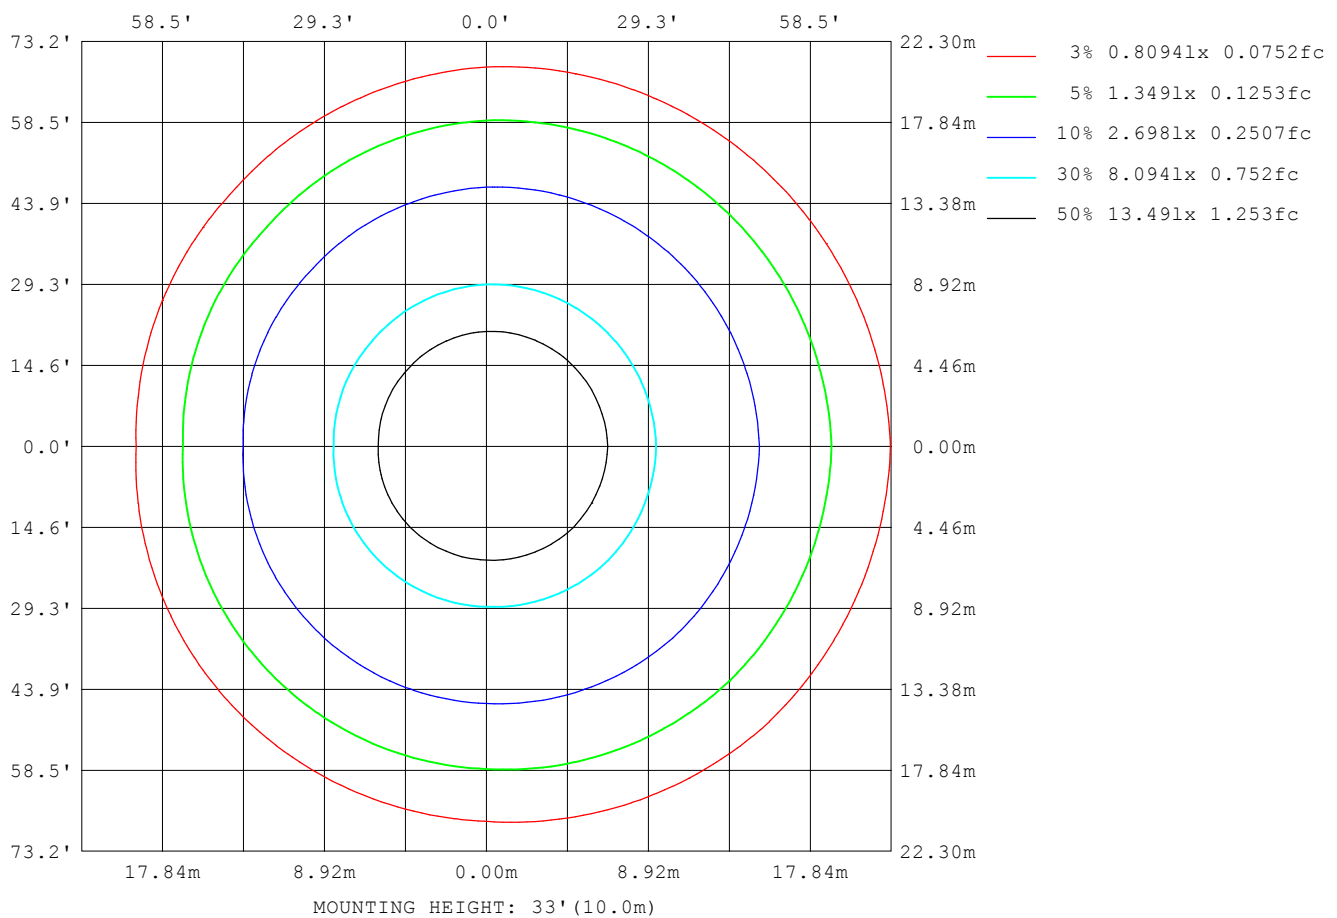

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6350
L_0~180 (75) av	5460
L_0~180 (85) av	4592
L_90~270 (65) av	6302
L_90~270 (75) av	5249
L_90~270 (85) av	3130
L_45 (65) av	6316
L_45 (75) av	5304
L_45 (85) av	3556

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

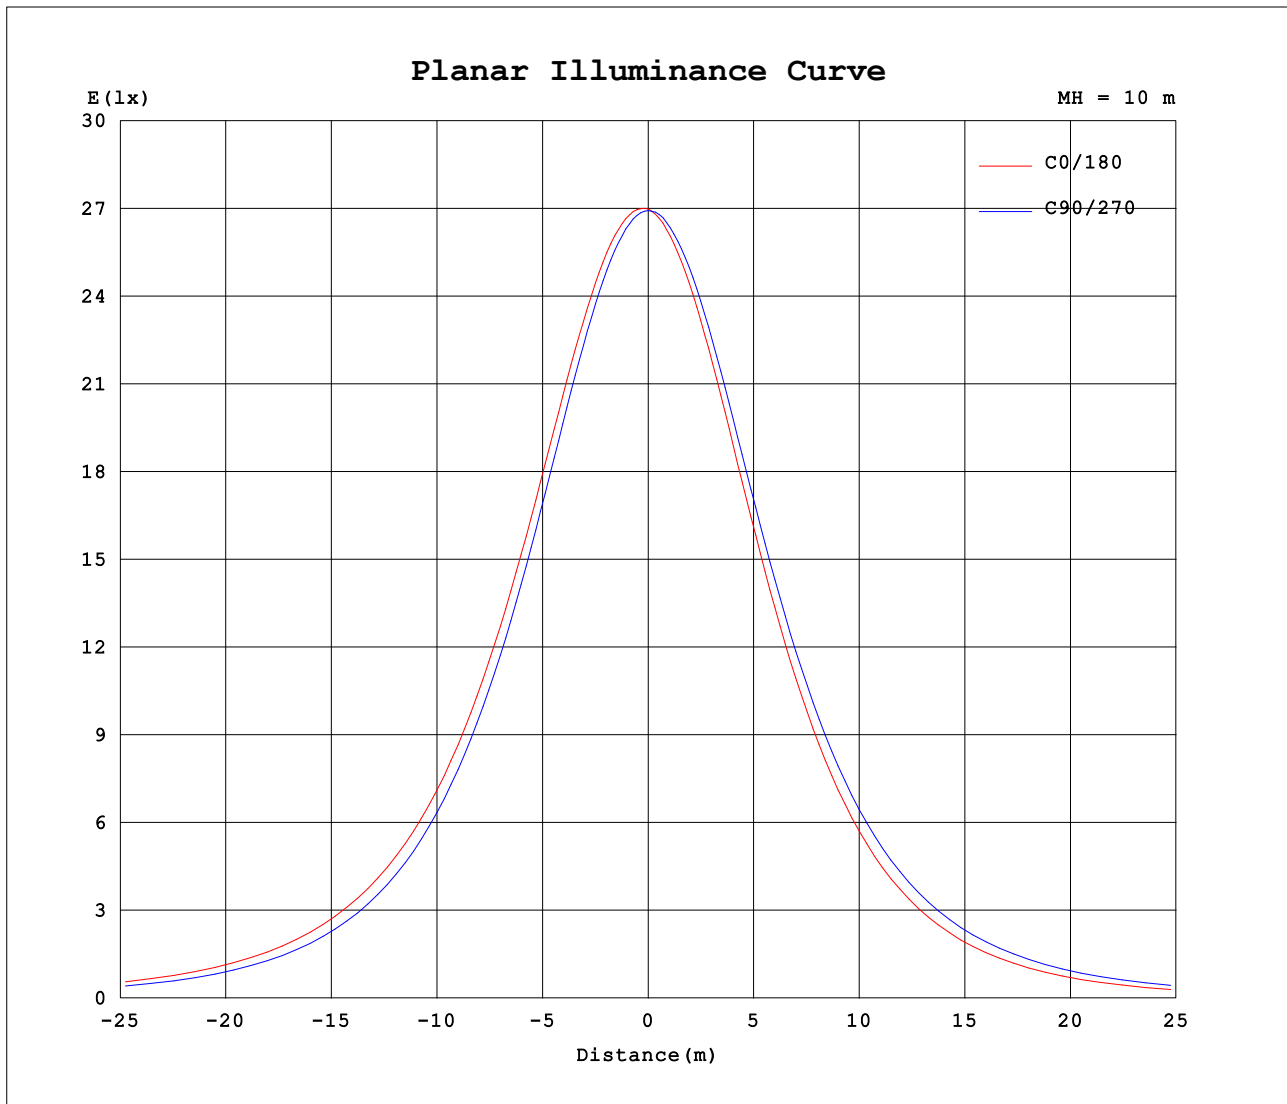

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.4970A P:59.90W PF:0.9980 Freq:60.00Hz Lamp Flux:7732.91x1 lm		
NAME: 净化灯	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2698	2692	2693	2696	2698	2692	2693	2696										
5	2709	2697	2679	2671	2659	2663	2683	2699										
10	2702	2678	2643	2624	2599	2613	2650	2678										
15	2667	2637	2584	2554	2519	2541	2596	2634										
20	2612	2574	2503	2462	2416	2446	2517	2567										
25	2533	2489	2400	2350	2292	2330	2417	2478										
30	2433	2381	2275	2216	2150	2195	2298	2369										
35	2312	2253	2133	2064	1989	2041	2158	2239										
40	2172	2107	1974	1895	1811	1869	2001	2087										
45	2012	1942	1796	1709	1618	1681	1825	1921										
50	1837	1760	1601	1504	1405	1479	1635	1737										
55	1643	1559	1395	1290	1185	1261	1426	1537										
60	1434	1347	1173	1063	956	1032	1209	1321										
65	1213	1123	939	829	719	797	978	1096										
70	982	889	702	595	486	555	741	858										
75	746	653	471	372	271	336	507	615										
80	506	425	262	176	92.3	146	291	389										
85	288	220	88.8	25.3	0.31	11.4	108	189										
90	107	54.3	0.35	0.40	0.41	0.37	0.30	39.6										
95	0.45	0.37	0.41	0.52	0.59	0.48	0.37	0.34										
100	0.44	0.46	0.53	0.67	0.75	0.65	0.49	0.46										
105	0.57	0.58	0.68	0.85	0.94	0.77	0.64	0.60										
110	0.76	0.73	0.85	1.04	1.13	0.95	0.81	0.76										
115	0.91	0.91	1.03	1.23	1.32	1.10	0.95	0.93										
120	1.11	1.08	1.22	1.43	1.51	1.30	1.11	1.13										
125	1.30	1.25	1.40	1.61	1.70	1.60	1.30	1.24										
130	1.49	1.43	1.58	1.79	1.86	1.79	1.47	1.50										
135	1.68	1.60	1.77	1.97	2.03	2.01	1.63	1.70										
140	1.87	1.78	1.97	2.14	2.18	2.25	1.79	1.89										
145	2.06	1.96	2.17	2.31	2.34	2.54	1.95	2.04										
150	2.27	2.15	2.36	2.49	2.50	2.74	2.12	2.07										
155	2.47	2.38	2.56	2.68	2.68	2.92	2.31	2.26										
160	2.64	2.53	2.74	2.86	2.85	3.16	2.50	2.46										
165	2.66	2.67	2.88	2.97	2.97	3.46	2.67	2.62										
170	2.74	2.76	2.96	3.04	3.02	3.48	3.30	2.71										
175	2.74	2.75	2.91	2.99	2.95	3.01	3.06	2.76										
180	2.83	2.82	2.83	2.87	2.84	2.82	2.83	2.87										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: