


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 139.12 lm/W			
MODEL		I _{max} (cd)	2834	S/MH(C0/180)	1.34
NOMINAL POWER(W)	60W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	8097.0	η UP,DN(C0-180)	0.1,52.0
NOMINAL FLUX(lm)	8097.03	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

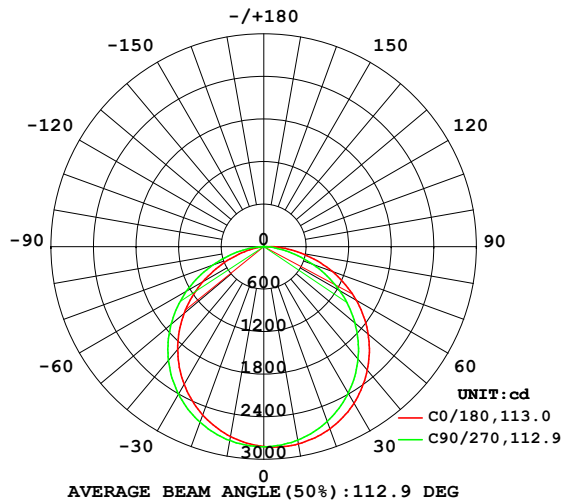

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

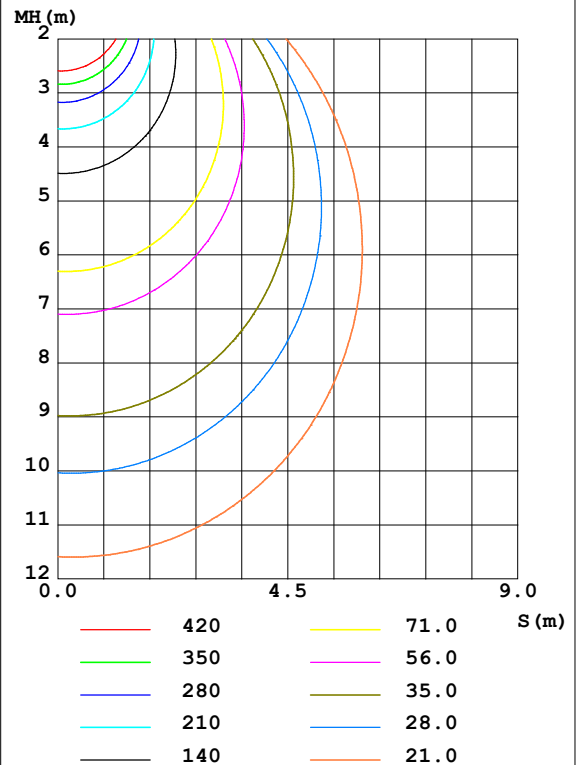

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2824	2805	2769	2750	2717	2736	2775	2806	0- 10	267.0	267.0	3.3,3.3
20	2733	2695	2622	2580	2526	2561	2635	2691	10- 20	765.8	1033	12.8,12.8
30	2548	2493	2385	2323	2246	2298	2405	2482	20- 30	1163	2196	27.1,27.1
40	2274	2208	2068	1987	1891	1954	2093	2188	30- 40	1407	3603	44.5,44.5
50	1922	1845	1680	1578	1468	1546	1708	1821	40- 50	1463	5067	62.6,62.6
60	1504	1412	1231	1114	997.4	1079	1261	1385	50- 60	1320	6387	78.9,78.9
70	1029	934.2	744.8	623.5	505.5	579.8	770.9	898.7	60- 70	995.2	7382	91.2,91.2
80	531.8	447.8	276.9	185.7	95.55	151.2	300.6	406.2	70- 80	552.2	7934	98,98
90	113.2	58.28	0.3739	0.4288	0.4362	0.3777	0.3100	41.05	80- 90	149.1	8084	99.8,99.8
100	0.4502	0.4846	0.5639	0.7123	0.7899	0.6753	0.5162	0.4769	90-100	5.015	8089	99.9,99.9
110	0.7890	0.7752	0.9005	1.093	1.189	0.9998	0.8528	0.7940	100-110	0.7871	8089	99.9,99.9
120	1.164	1.143	1.288	1.502	1.589	1.360	1.175	1.174	110-120	1.093	8090	99.9,99.9
130	1.569	1.512	1.661	1.877	1.964	1.869	1.548	1.571	120-130	1.341	8092	99.9,99.9
140	1.959	1.868	2.077	2.248	2.291	2.353	1.880	1.985	130-140	1.458	8093	100,100
150	2.370	2.267	2.489	2.618	2.621	2.843	2.236	2.182	140-150	1.421	8095	100,100
160	2.768	2.676	2.882	2.994	2.979	3.303	2.631	2.572	150-160	1.223	8096	100,100
170	2.879	2.904	3.102	3.182	3.156	3.580	3.434	2.841	160-170	0.8492	8097	100,100
180	2.972	2.957	2.969	3.010	2.964	2.967	2.976	3.018	170-180	0.2937	8097	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

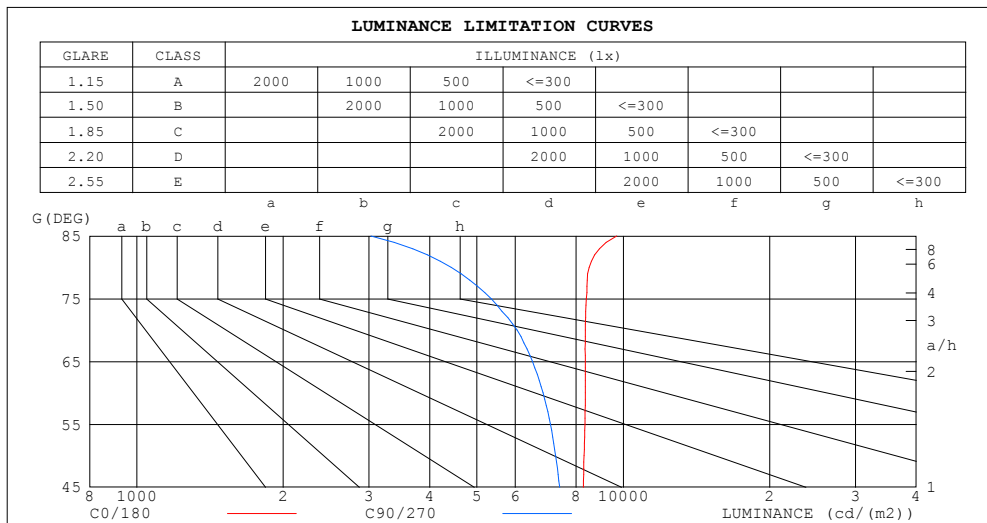

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9687	3028
80	8506	4429
75	8395	5350
70	8355	6049
65	8353	6509
60	8355	6841
55	8343	7085
50	8307	7261
45	8279	7397


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

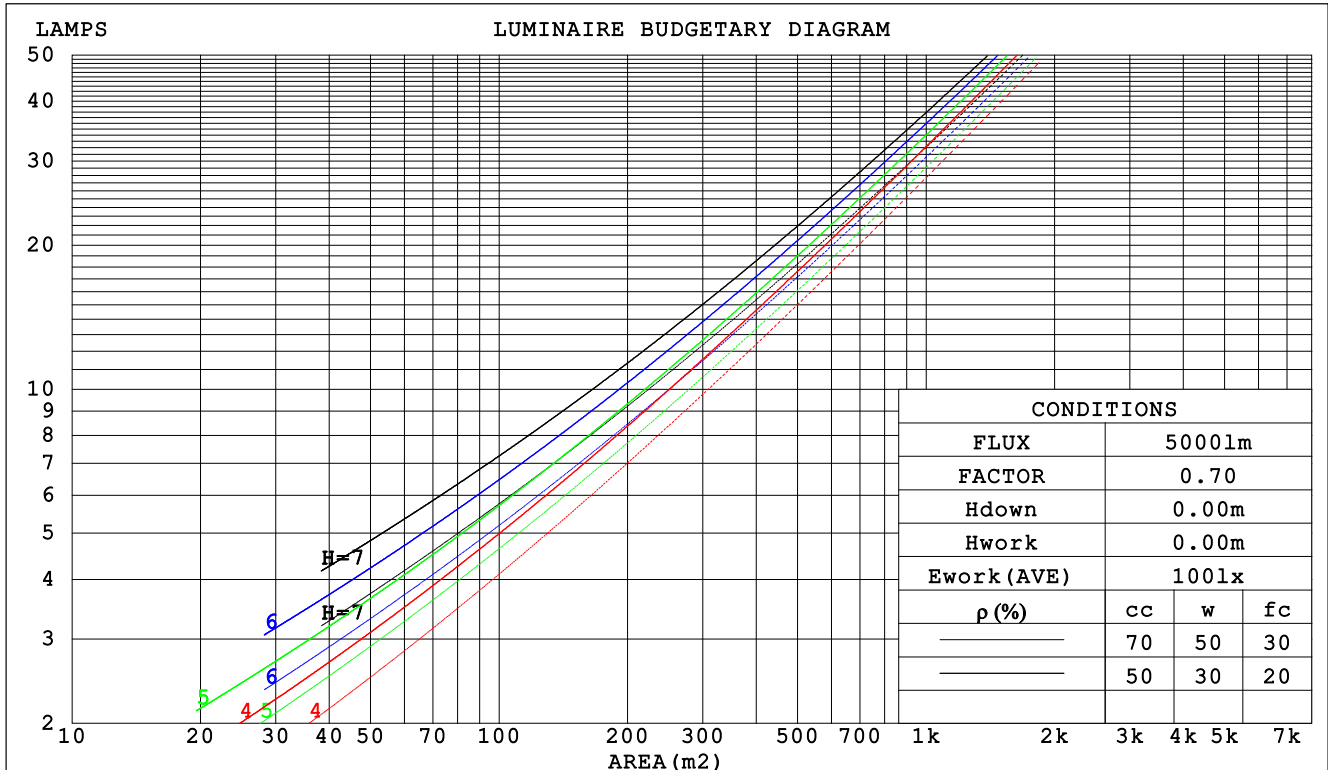

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm					
NAME: 净化灯			TYPE:3500K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.309	.176	.056	.302	.172	.055	.288	.165	.053	.276	.159	.051	.265	.153	.049		
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045		
3.0	.270	.143	.043	.264	.141	.043	.254	.137	.042	.244	.134	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.235	.125	.037	.226	.121	.037	.218	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.088	.052	.093	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.048	.129	.079	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.066	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.061	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.053	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm											
NAME: 净化灯					TYPE:3500K			WEIGHT:			
SPEC.:					DIM.: 2X2			SERIAL No.:			
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	20.7	22.2	21.0	22.4	22.6	20.0	21.5	20.3	21.7	21.9
	3H	22.5	23.9	22.8	24.1	24.4	21.5	22.9	21.8	23.1	23.3
	4H	23.3	24.6	23.6	24.9	25.2	22.0	23.3	22.3	23.6	23.8
	6H	24.0	25.2	24.3	25.5	25.8	22.3	23.6	22.7	23.9	24.2
	8H	24.3	25.5	24.6	25.8	26.0	22.4	23.6	22.8	23.9	24.2
	12H	24.5	25.7	24.8	26.0	26.3	22.4	23.6	22.8	23.9	24.2
4H	2H	21.3	22.6	21.6	22.9	23.1	20.8	22.1	21.1	22.4	22.6
	3H	23.3	24.5	23.6	24.8	25.1	22.4	23.6	22.8	23.9	24.2
	4H	24.2	25.3	24.6	25.6	26.0	23.1	24.2	23.5	24.5	24.8
	6H	25.1	26.0	25.5	26.4	26.7	23.6	24.5	24.0	24.9	25.3
	8H	25.4	26.3	25.8	26.7	27.1	23.7	24.6	24.1	25.0	25.4
	12H	25.7	26.5	26.2	26.9	27.3	23.8	24.6	24.2	25.0	25.4
8H	4H	24.5	25.4	24.9	25.8	26.2	23.5	24.4	23.9	24.8	25.2
	6H	25.5	26.2	26.0	26.7	27.1	24.2	24.9	24.6	25.3	25.8
	8H	26.0	26.6	26.4	27.1	27.5	24.4	25.1	24.9	25.5	26.0
	12H	26.4	27.0	26.9	27.4	27.9	24.6	25.1	25.0	25.6	26.1
12H	4H	24.5	25.3	25.0	25.7	26.1	23.6	24.4	24.0	24.8	25.2
	6H	25.6	26.2	26.0	26.7	27.1	24.3	25.0	24.8	25.4	25.9
	8H	26.1	26.7	26.6	27.1	27.6	24.6	25.2	25.1	25.6	26.1
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 8097 lm Total Lamp Luminous Flux. (8log(F/F0) = 7.3)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

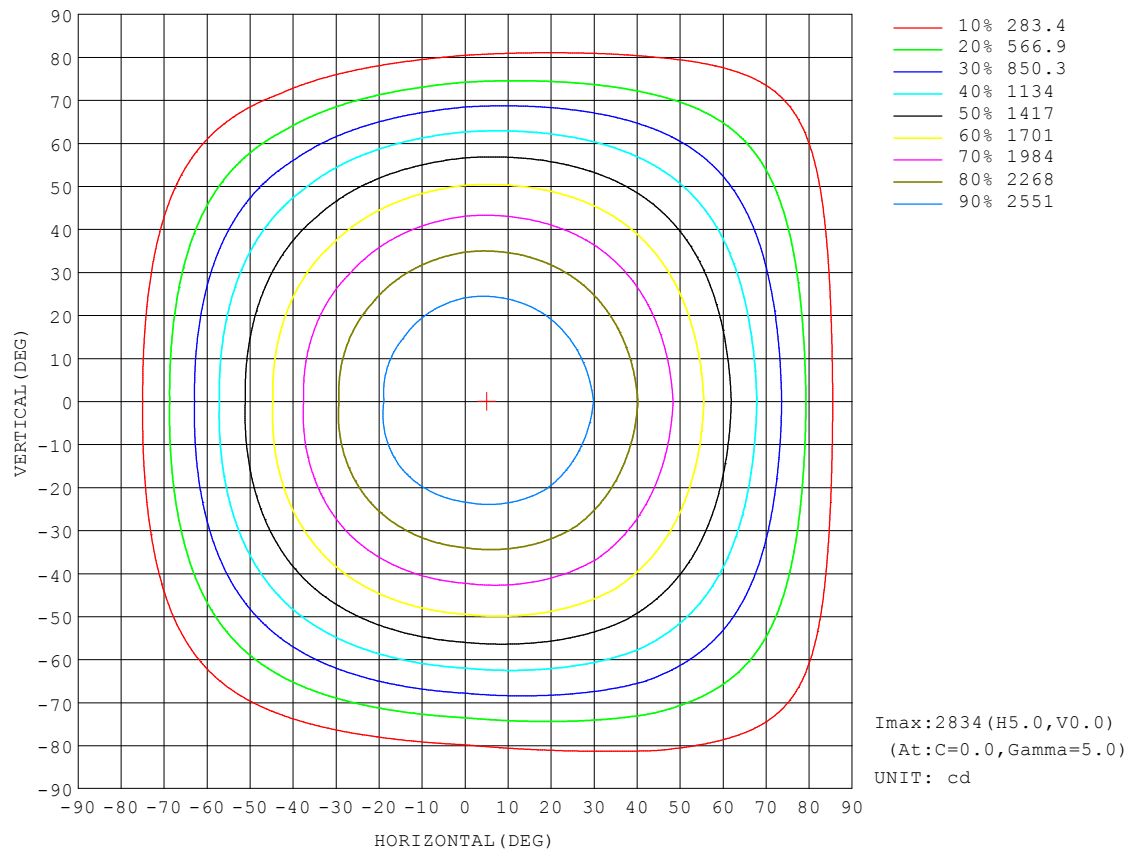


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

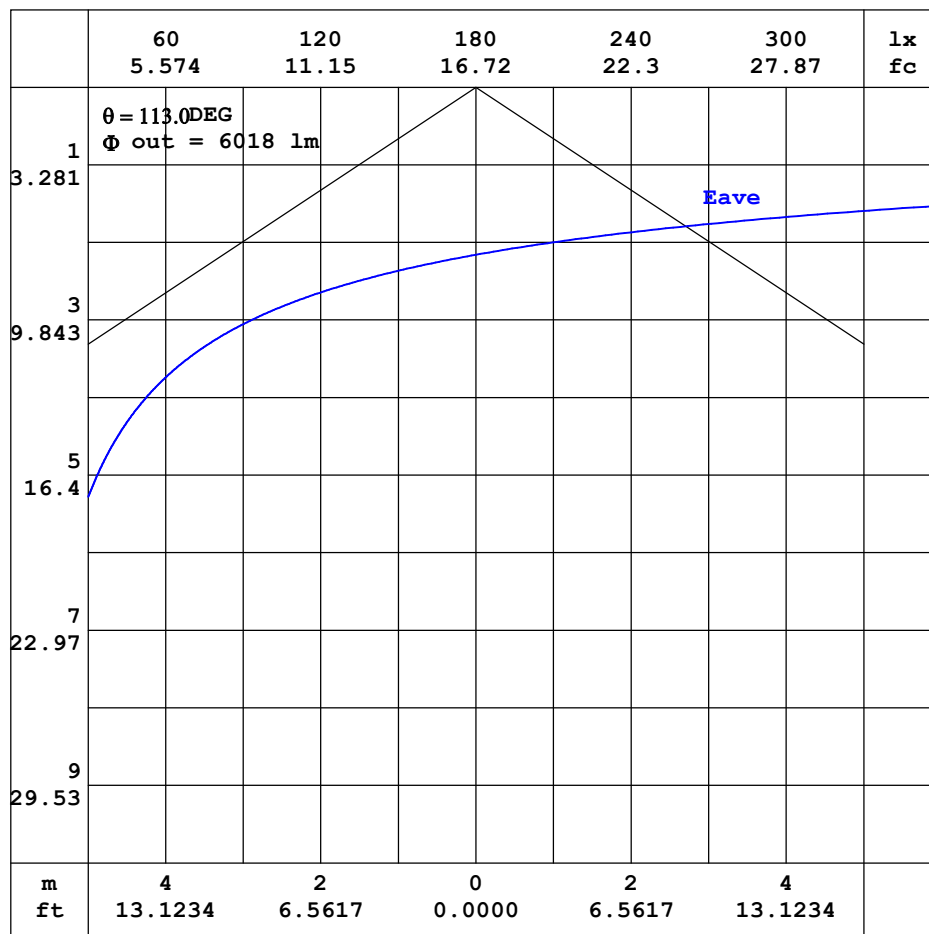


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

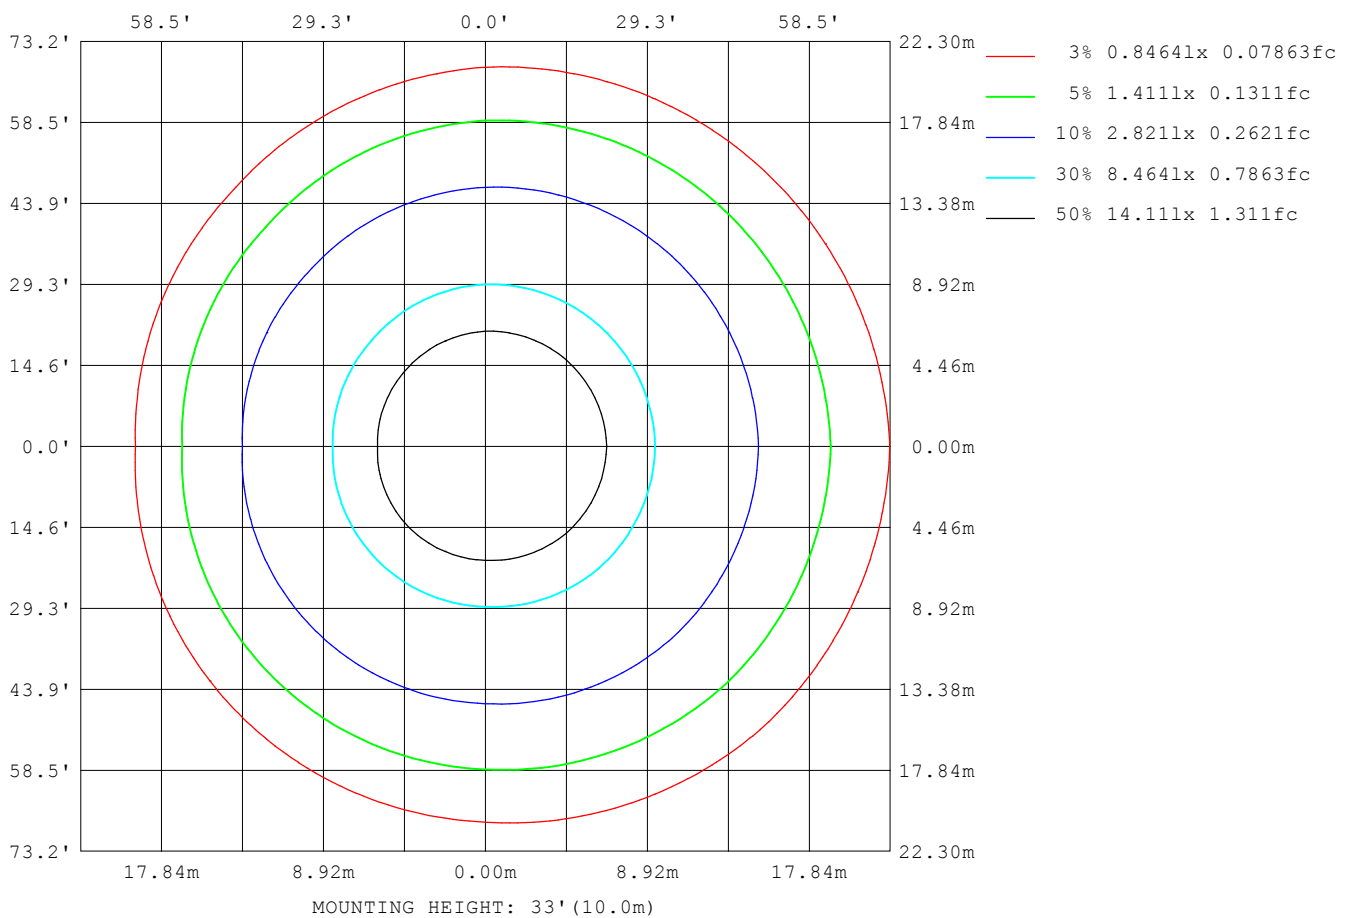

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6639
L_0~180 (75) av	5709
L_0~180 (85) av	4849
L_90~270 (65) av	6606
L_90~270 (75) av	5501
L_90~270 (85) av	3257
L_45 (65) av	6611
L_45 (75) av	5566
L_45 (85) av	3746

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

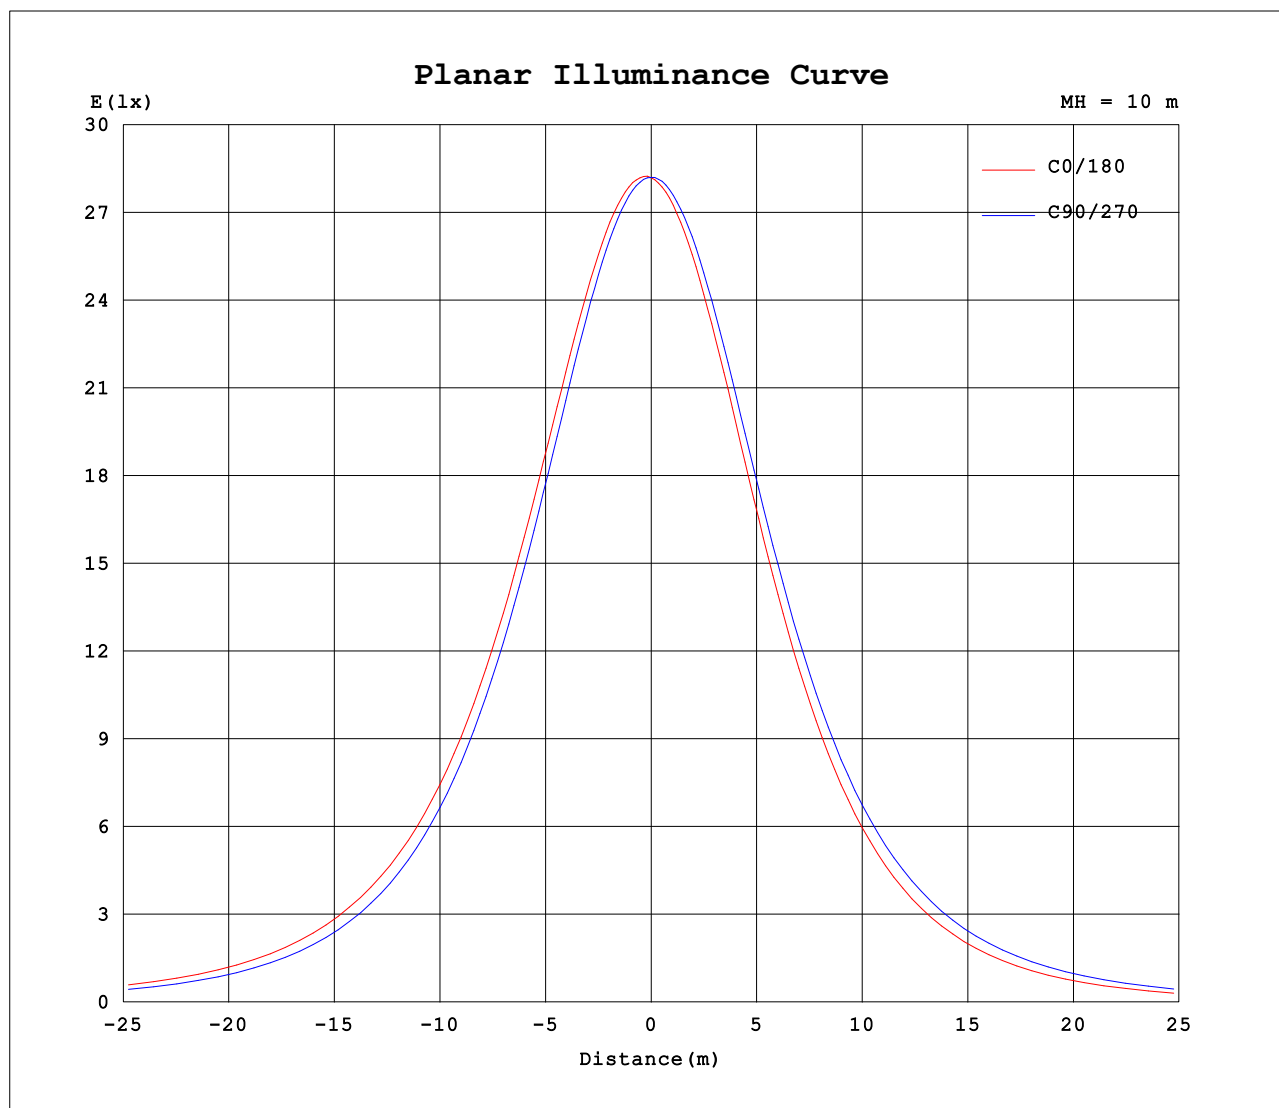

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.4820A P:58.20W PF:0.9990 Freq:60.00Hz Lamp Flux:8097.03x1 lm		
NAME: 净化灯	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2819	2818	2820	2827	2819	2818	2820	2827										
5	2834	2822	2808	2801	2781	2789	2810	2828										
10	2824	2805	2769	2750	2717	2736	2775	2806										
15	2790	2762	2708	2676	2632	2659	2716	2760										
20	2733	2695	2622	2580	2526	2561	2635	2691										
25	2652	2605	2514	2462	2393	2440	2530	2599										
30	2548	2493	2385	2323	2246	2298	2405	2482										
35	2420	2360	2237	2165	2077	2135	2258	2346										
40	2274	2208	2068	1987	1891	1954	2093	2188										
45	2108	2035	1883	1792	1688	1759	1908	2014										
50	1922	1845	1680	1578	1468	1546	1708	1821										
55	1723	1638	1463	1353	1237	1319	1489	1611										
60	1504	1412	1231	1114	997	1079	1261	1385										
65	1271	1177	990	869	749	831	1020	1145										
70	1029	934	745	623	506	580	771	899										
75	782	687	499	391	282	350	527	647										
80	532	448	277	186	95.6	151	301	406										
85	304	233	95.0	27.1	0.33	11.1	109	199										
90	113	58.3	0.37	0.43	0.44	0.38	0.31	41.1										
95	0.49	0.39	0.44	0.55	0.61	0.52	0.38	0.36										
100	0.45	0.48	0.56	0.71	0.79	0.68	0.52	0.48										
105	0.60	0.62	0.72	0.90	0.99	0.83	0.68	0.62										
110	0.79	0.78	0.90	1.09	1.19	1.00	0.85	0.79										
115	0.95	0.95	1.08	1.29	1.39	1.15	1.01	0.99										
120	1.16	1.14	1.29	1.50	1.59	1.36	1.17	1.17										
125	1.36	1.33	1.47	1.69	1.78	1.67	1.36	1.30										
130	1.57	1.51	1.66	1.88	1.96	1.87	1.55	1.57										
135	1.77	1.69	1.87	2.08	2.12	2.10	1.71	1.77										
140	1.96	1.87	2.08	2.25	2.29	2.35	1.88	1.99										
145	2.16	2.06	2.28	2.42	2.45	2.64	2.06	2.14										
150	2.37	2.27	2.49	2.62	2.62	2.84	2.24	2.18										
155	2.59	2.50	2.70	2.81	2.81	3.04	2.43	2.37										
160	2.77	2.68	2.88	2.99	2.98	3.30	2.63	2.57										
165	2.79	2.81	3.03	3.12	3.10	3.60	2.80	2.75										
170	2.88	2.90	3.10	3.18	3.16	3.58	3.43	2.84										
175	2.89	2.90	3.05	3.14	3.07	3.13	3.17	2.89										
180	2.97	2.96	2.97	3.01	2.96	2.97	2.98	3.02										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: