


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.20 lm/W			
MODEL		I _{max} (cd)	2773	S/MH(C0/180)	1.34
NOMINAL POWER(W)	60W	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7919.0	η UP,DN(C0-180)	0.1,52.0
NOMINAL FLUX(lm)	7918.97	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

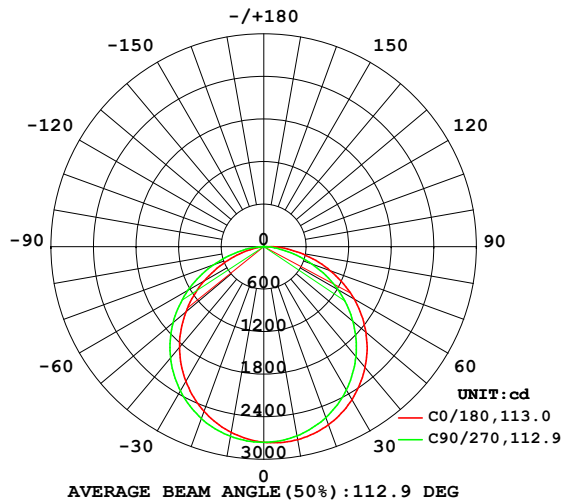

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

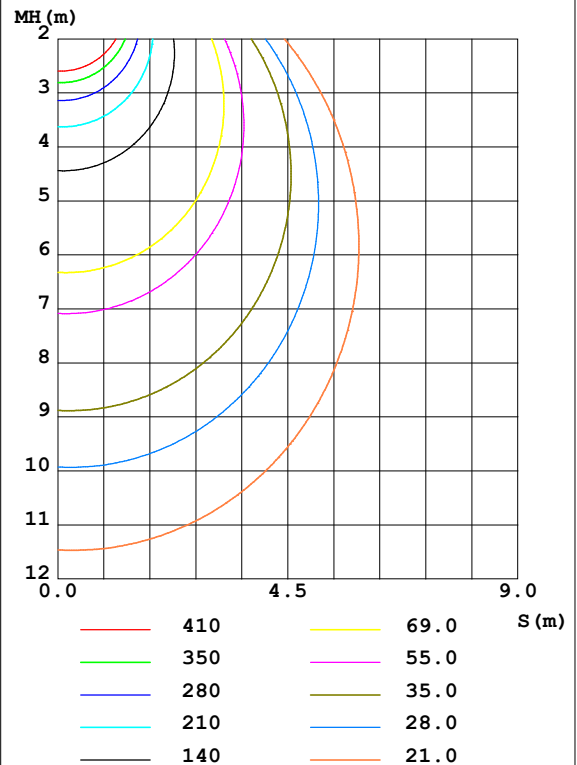

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2763	2742	2708	2688	2659	2674	2715	2745	0- 10	261.1	261.1	3.3,3.3
20	2673	2634	2565	2522	2470	2503	2578	2631	10- 20	748.9	1010	12.8,12.8
30	2491	2438	2334	2272	2198	2246	2353	2427	20- 30	1138	2148	27.1,27.1
40	2224	2158	2023	1943	1851	1912	2047	2141	30- 40	1376	3524	44.5,44.5
50	1879	1804	1642	1542	1437	1512	1672	1780	40- 50	1431	4955	62.6,62.6
60	1470	1381	1203	1092	976.5	1054	1235	1355	50- 60	1291	6247	78.9,78.9
70	1003	912.6	724.4	612.4	496.4	565.7	756.2	879.8	60- 70	973.2	7220	91.2,91.2
80	518.1	438.1	269.8	182.4	94.43	147.0	295.4	397.7	70- 80	539.6	7759	98,98
90	109.3	57.48	0.4221	0.4724	0.4266	0.3728	0.3028	40.18	80- 90	145.8	7905	99.8,99.8
100	0.5155	0.5427	0.6512	0.7972	0.7681	0.6633	0.5017	0.4575	90-100	4.877	7910	99.9,99.9
110	0.8883	0.8890	1.017	1.202	1.160	0.9780	0.8334	0.7698	100-110	0.8277	7911	99.9,99.9
120	1.278	1.269	1.419	1.628	1.572	1.346	1.170	1.143	110-120	1.145	7912	99.9,99.9
130	1.712	1.657	1.818	2.032	1.950	1.864	1.538	1.559	120-130	1.399	7914	99.9,99.9
140	2.116	2.042	2.240	2.415	2.304	2.358	1.894	1.990	130-140	1.518	7915	100,100
150	2.535	2.446	2.605	2.764	2.718	2.901	2.294	2.254	140-150	1.488	7917	100,100
160	2.937	2.841	2.988	3.132	3.103	3.397	2.703	2.676	150-160	1.276	7918	100,100
170	3.061	3.071	3.209	3.315	3.296	3.643	3.490	2.959	160-170	0.8836	7919	100,100
180	3.124	3.102	3.061	3.131	3.122	3.102	3.061	3.143	170-180	0.3055	7919	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

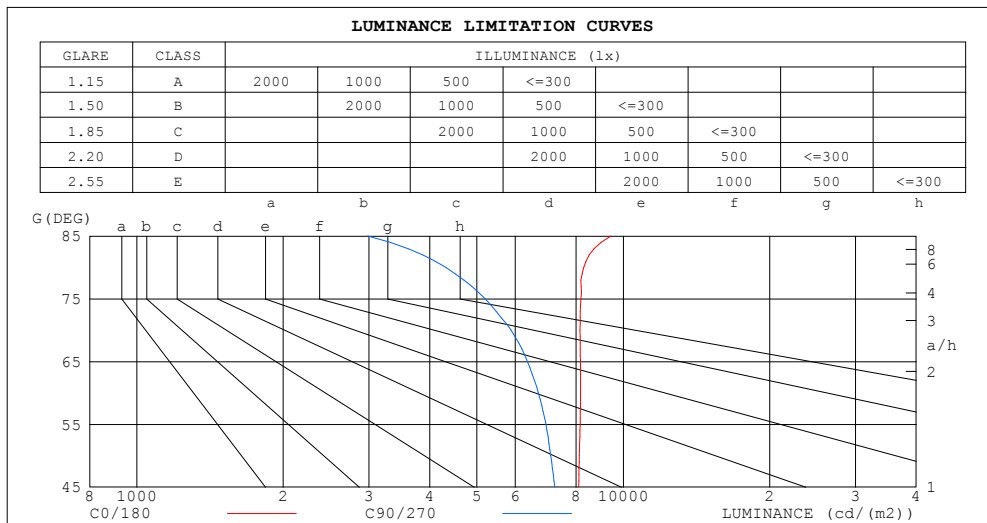

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9427	2983
80	8288	4316
75	8187	5204
70	8147	5884
65	8163	6356
60	8167	6685
55	8154	6931
50	8119	7094
45	8096	7235


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

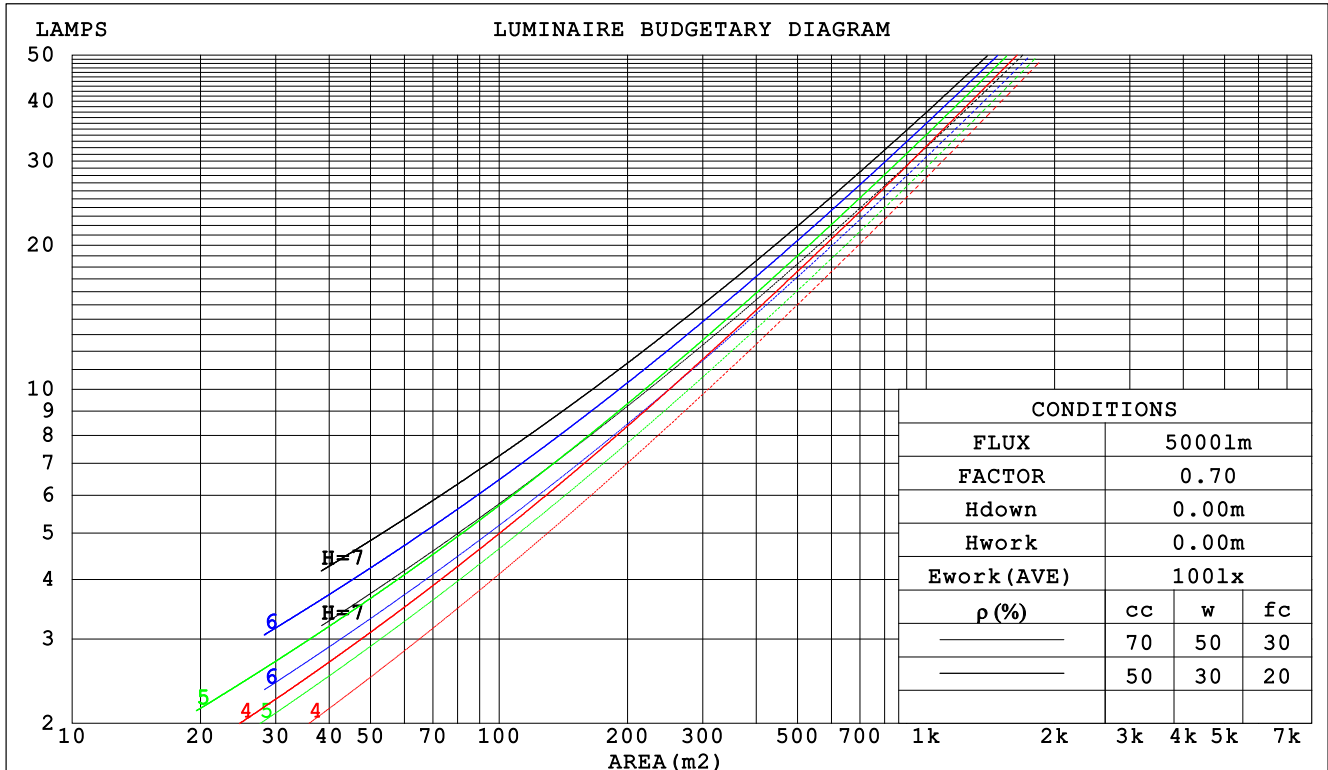

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm					
NAME: 净化灯			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 2X2		SERIAL No.:
MFR.: WS			SUR.:0.6*0.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0		
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
pfc	20%			20%			20%			20%			20%			0		
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)											
0.0																		
1.0	.309	.176	.056	.302	.172	.055	.288	.165	.053	.276	.159	.051	.265	.153	.049			
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045			
3.0	.270	.143	.043	.264	.141	.043	.254	.137	.042	.244	.134	.041	.235	.130	.040			
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036			
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033			
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030			
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027			
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025			
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023			
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.173	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.088	.052	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.129	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.066	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.061	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm										
NAME: 净化灯					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 2X2			SERIAL No.:		
MFR.: WS					SUR.:0.6*0.6			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise				Viewed endwise				
x = 2H y = 2H	20.6	22.1	20.9	22.3	22.5	19.9	21.4	20.2	21.6	21.8
3H	22.4	23.8	22.7	24.0	24.3	21.4	22.8	21.7	23.0	23.2
4H	23.2	24.5	23.5	24.8	25.1	21.9	23.2	22.2	23.5	23.8
6H	23.9	25.1	24.2	25.4	25.7	22.2	23.5	22.6	23.8	24.1
8H	24.2	25.4	24.5	25.7	26.0	22.3	23.5	22.7	23.8	24.1
12H	24.4	25.6	24.8	25.9	26.2	22.4	23.5	22.7	23.8	24.1
4H 2H	21.2	22.6	21.5	22.8	23.1	20.7	22.0	21.0	22.3	22.5
3H	23.2	24.4	23.6	24.7	25.0	22.3	23.5	22.7	23.8	24.1
4H	24.1	25.2	24.5	25.5	25.9	23.0	24.1	23.4	24.4	24.8
6H	25.0	25.9	25.4	26.3	26.6	23.5	24.4	23.9	24.8	25.2
8H	25.3	26.2	25.7	26.6	27.0	23.6	24.5	24.0	24.9	25.3
12H	25.6	26.4	26.1	26.8	27.2	23.7	24.5	24.1	24.9	25.3
8H 4H	24.4	25.3	24.8	25.7	26.1	23.4	24.3	23.9	24.7	25.1
6H	25.4	26.2	25.9	26.6	27.0	24.1	24.8	24.5	25.2	25.7
8H	25.9	26.5	26.4	27.0	27.4	24.3	25.0	24.8	25.4	25.9
12H	26.3	26.9	26.8	27.3	27.8	24.5	25.0	25.0	25.5	26.0
12H 4H	24.4	25.2	24.9	25.6	26.0	23.5	24.3	23.9	24.7	25.1
6H	25.5	26.1	26.0	26.6	27.0	24.2	24.9	24.7	25.3	25.8
8H	26.0	26.6	26.5	27.0	27.5	24.5	25.1	25.0	25.5	26.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 7919 lm Total Lamp Luminous Flux. (8log(F/F0) = 7.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

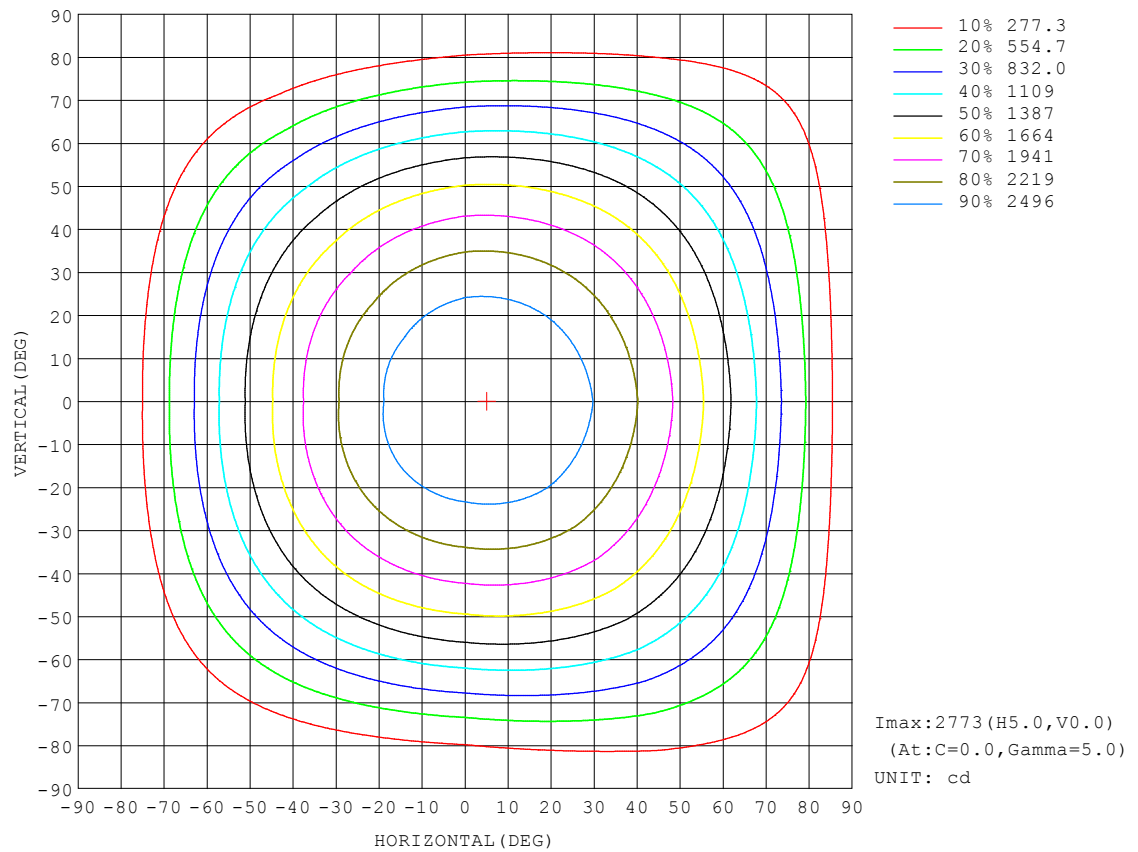


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

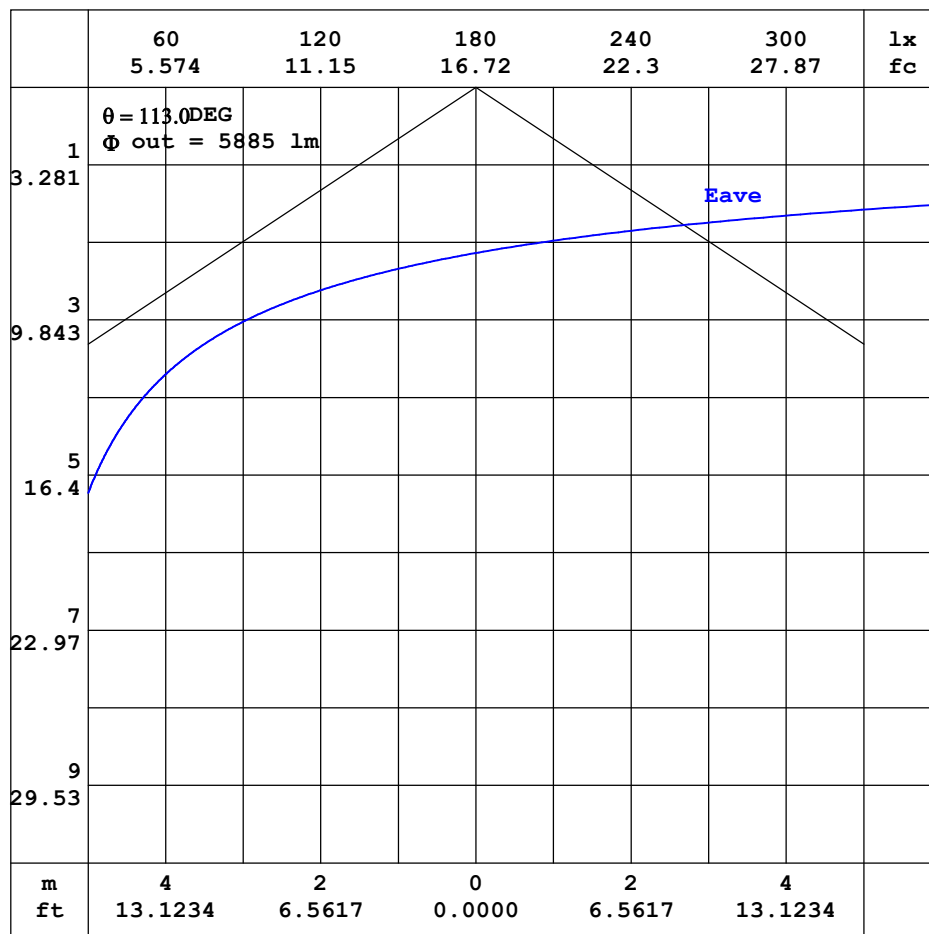


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

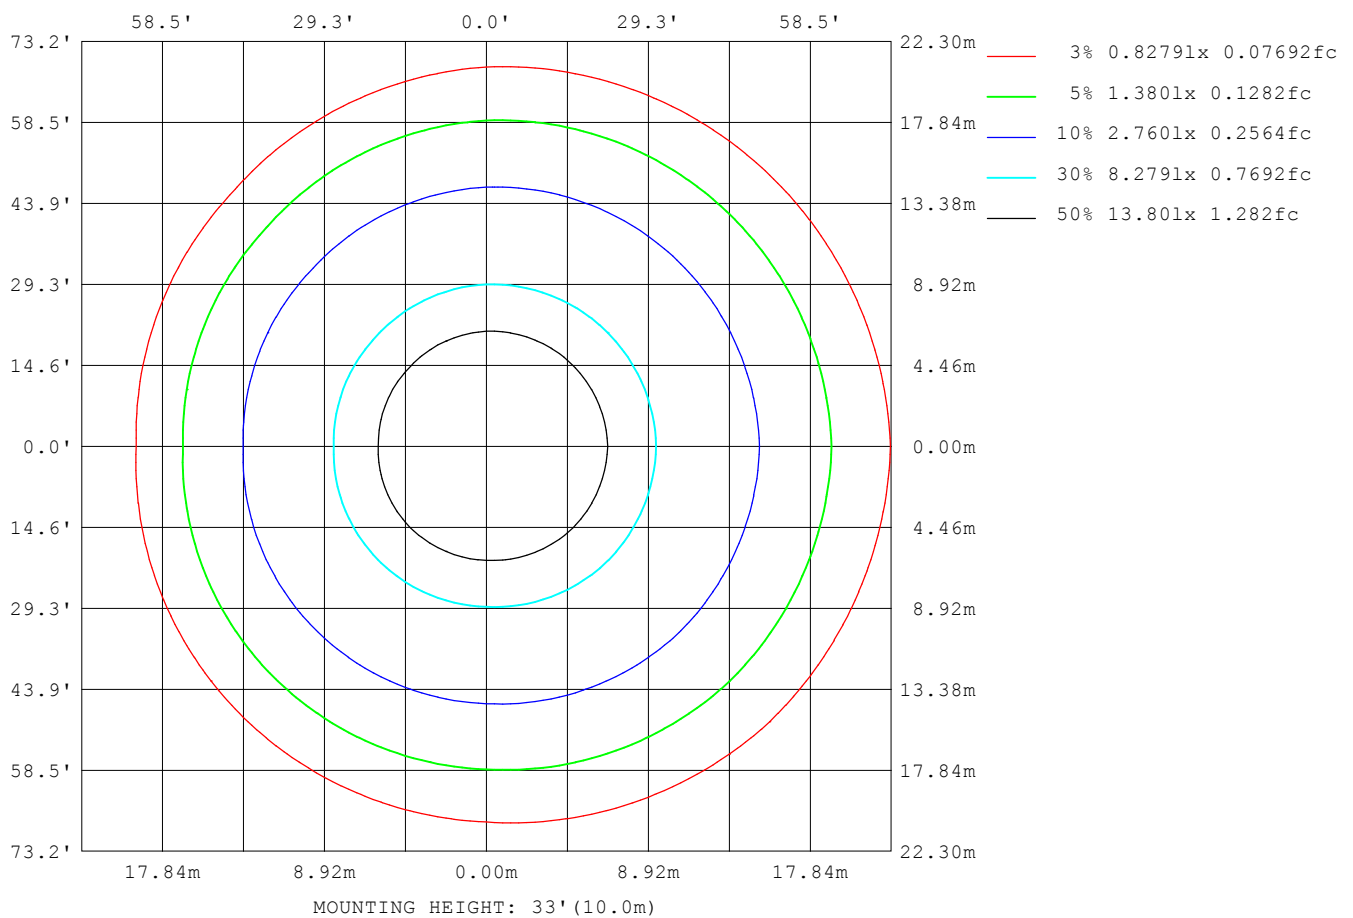

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6495
L_0~180 (75) av	5585
L_0~180 (85) av	4719
L_90~270 (65) av	6463
L_90~270 (75) av	5372
L_90~270 (85) av	3205
L_45 (65) av	6467
L_45 (75) av	5442
L_45 (85) av	3658

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

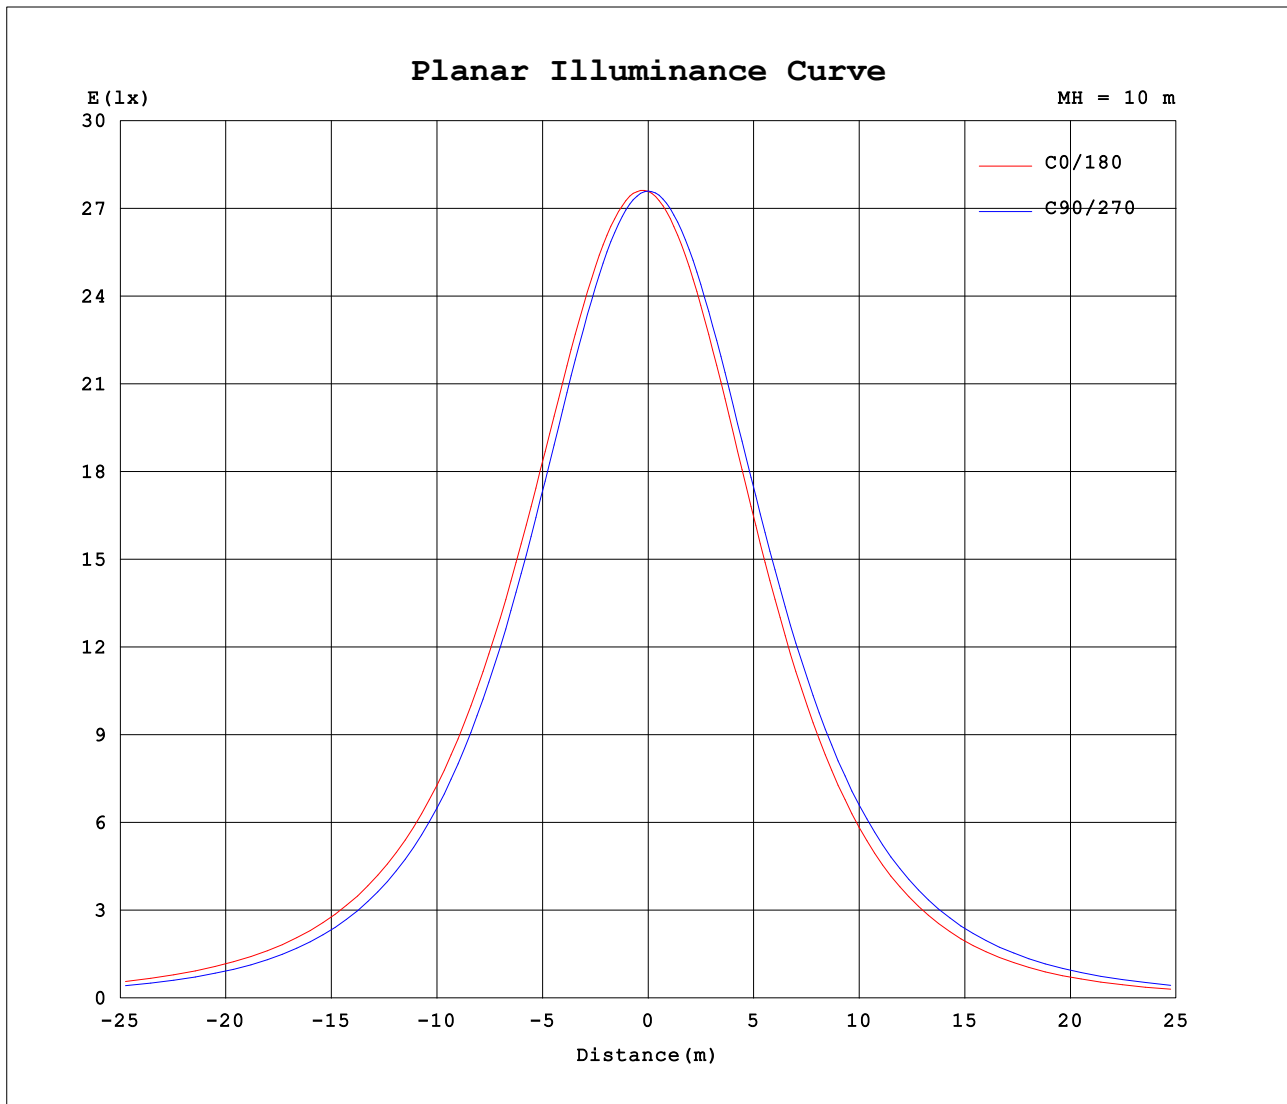

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.4960A P:59.90W PF:1.000 Freq:60.00Hz Lamp Flux:7918.97x1 lm		
NAME: 净化灯	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 2X2	SERIAL No.:
MFR.: WS	SUR.:0.6*0.6	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2759	2756	2760	2765	2759	2756	2760	2765										
5	2773	2760	2746	2737	2720	2727	2749	2765										
10	2763	2742	2708	2688	2659	2674	2715	2745										
15	2730	2700	2647	2617	2576	2599	2658	2698										
20	2673	2634	2565	2522	2470	2503	2578	2631										
25	2593	2547	2459	2409	2344	2385	2475	2540										
30	2491	2438	2334	2272	2198	2246	2353	2427										
35	2366	2307	2185	2116	2032	2088	2210	2294										
40	2224	2158	2023	1943	1851	1912	2047	2141										
45	2061	1990	1842	1752	1652	1720	1868	1970										
50	1879	1804	1642	1542	1437	1512	1672	1780										
55	1684	1600	1431	1321	1211	1288	1458	1574										
60	1470	1381	1203	1092	976	1054	1235	1355										
65	1242	1151	967	852	734	812	999	1121										
70	1003	913	724	612	496	566	756	880										
75	763	671	485	383	278	342	516	633										
80	518	438	270	182	94.4	147	295	398										
85	296	228	93.6	26.6	0.32	10.5	108	194										
90	109	57.5	0.42	0.47	0.43	0.37	0.30	40.2										
95	0.50	0.43	0.51	0.63	0.59	0.50	0.38	0.35										
100	0.52	0.54	0.65	0.80	0.77	0.66	0.50	0.46										
105	0.68	0.71	0.82	0.99	0.96	0.81	0.66	0.61										
110	0.89	0.89	1.02	1.20	1.16	0.98	0.83	0.77										
115	1.06	1.07	1.21	1.43	1.37	1.14	0.99	0.96										
120	1.28	1.27	1.42	1.63	1.57	1.35	1.17	1.14										
125	1.50	1.47	1.62	1.83	1.77	1.66	1.35	1.30										
130	1.71	1.66	1.82	2.03	1.95	1.86	1.54	1.56										
135	1.92	1.85	2.04	2.23	2.12	2.09	1.72	1.76										
140	2.12	2.04	2.24	2.41	2.30	2.36	1.89	1.99										
145	2.33	2.24	2.45	2.58	2.54	2.68	2.11	2.17										
150	2.54	2.45	2.61	2.76	2.72	2.90	2.29	2.25										
155	2.75	2.66	2.81	2.96	2.91	3.10	2.50	2.46										
160	2.94	2.84	2.99	3.13	3.10	3.40	2.70	2.68										
165	2.97	2.98	3.15	3.25	3.24	3.67	2.88	2.86										
170	3.06	3.07	3.21	3.32	3.30	3.64	3.49	2.96										
175	3.05	3.06	3.15	3.25	3.23	3.26	3.23	3.01										
180	3.12	3.10	3.06	3.13	3.12	3.10	3.06	3.14										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: